


6061-T4 AL. ALLOY POLE CAP WITH (3) 1/4"-20NC-2 ST. STL. ALLEN HEAD CUP POINT SET SCREWS

6063-T6 AL. ALLOY SHAFT 10" O.D. X .250 WALL TAPERED 10" X 8" SATIN BRUSH FINISH

6' - 0" STRAIGHT (8" O.D.)

18' - 10"

20' - 6"

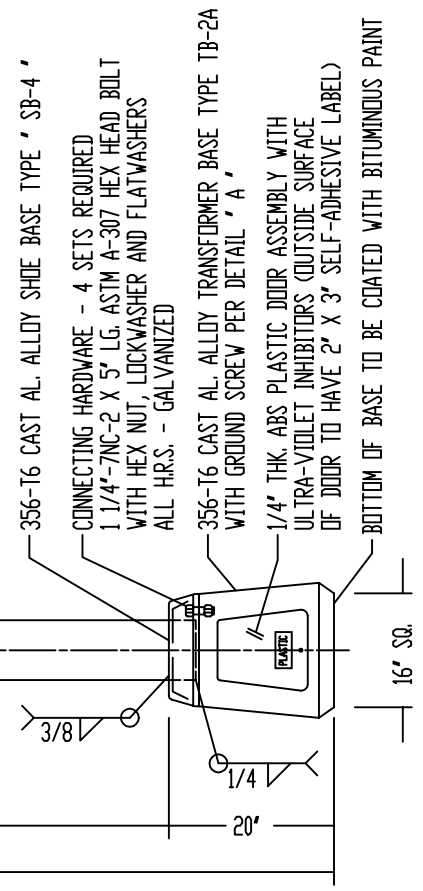

- NOTE:
1. - USE 4043 WELD WIRE.
 2. - 6063 ASSEMBLY .375 WALL OR LESS TO BE HEAT-TREATED TO T6 TEMPER AFTER WELDING.
 3. - POLE ASSEMBLY TO BE SUPPLIED WITH 1 1/4" I.D. RUBBER GRUMMET FOR WIRING TO TRAFFIC MAST ARM (FIELD DRILL 1 1/2" DIA. HOLE).

P&K				INTERNAL	
A	DESCRIPTION	DATE	BY	CHK	P&K POLE PRODUCTS, INC. 84 Foundry St., Newark, N.J.
B	WAS 5'-0" TOP STR. DELETED WIRE HOLE	07-15-94 12-09-97	WVW WVW		
TITLE					S1080020063K-70
FURNISH OR TEMPER					BERGEN CODE ST10-2006
DR. M.M.S.					07-24-95
CR. W.W.W.					07-24-95
APP.					C-105661
CUSTOMER					SCALE
BERGEN COUNTY DEPT. OF PUBLIC WORKS					NONE