



Product Type: Autoscope® HOW TO—Reset to Factory Default Configuration

Reference: AN2114
Date: 20 March 2009

Purpose

This procedure quickly resets *Autoscope*® equipment to its factory default configuration. The process is helpful when installing a spare unit, after upgrading new *Terra*™ Technology units to new software versions, or in training exercises.


Introduction

Many times, it becomes necessary to reset an *Autoscope* device to its default configuration, just like a new unit out-of-the-box from the factory. For example, this is a good procedure to start the *Terra* Access Point (TAP DPM)¹ auto learn when the TAP was previously programmed.

Briefly, the Software Installer provides an [Advanced...] option to reset the device to its Factory Default Configuration. The process takes only 1 or 2 minutes. You can reset more than one device at the same time.

Application

1. In Network Browser, select the unit or multiple units.
2. Choose “Install Software.”

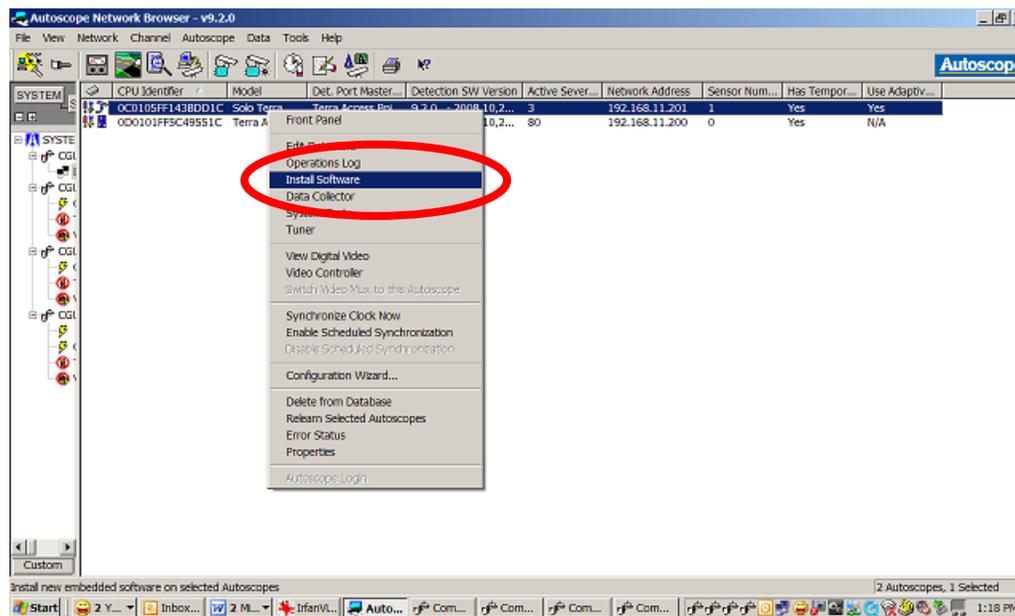


¹ TAP DPM = *Terra* Access Point Detector Port Master




Autoscope®

AN2114: HOW TO—Reset to Factory Default Configuration

3. Click [No] when asked, “Would you like to immediately install this software version on the selected Autoscope?”

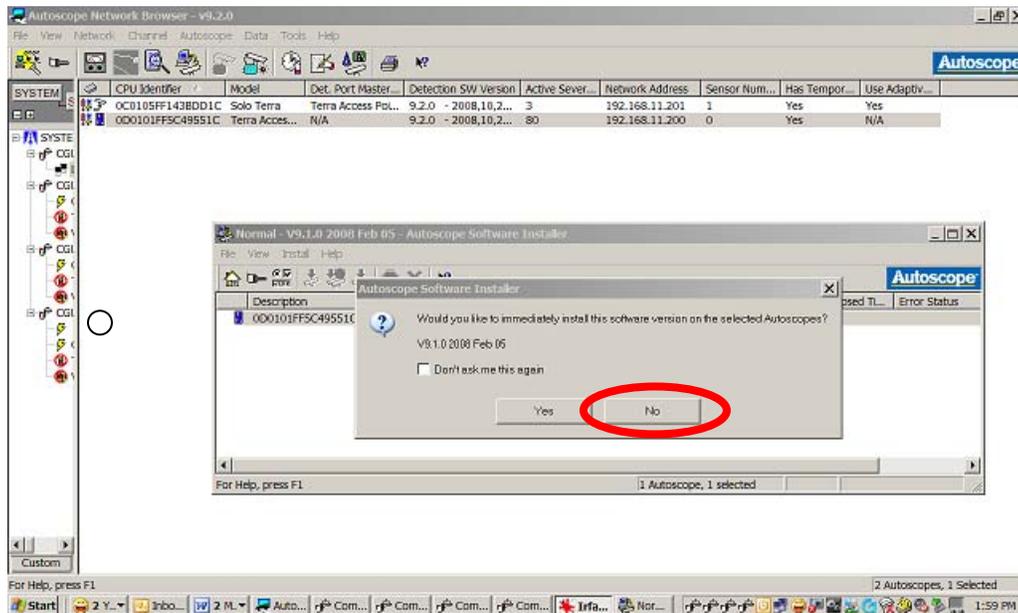

4. Choose “Versions and Options.”

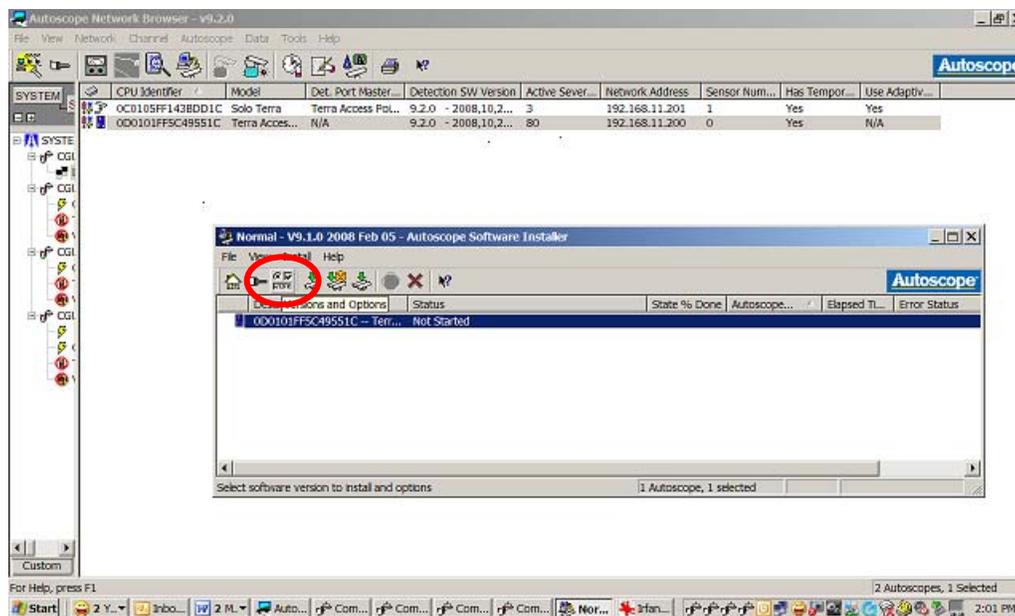





Autoscope®

AN2114: HOW TO— Reset to Factory Default Configuration

- When the “Install Options” dialog comes into view, click [Advanced...] in the Options box on the right.
- After the “Advanced Options” dialog comes into view:
 - Click the “Factory Default Configuration” check box.
 - Select [OK] to close this dialog.

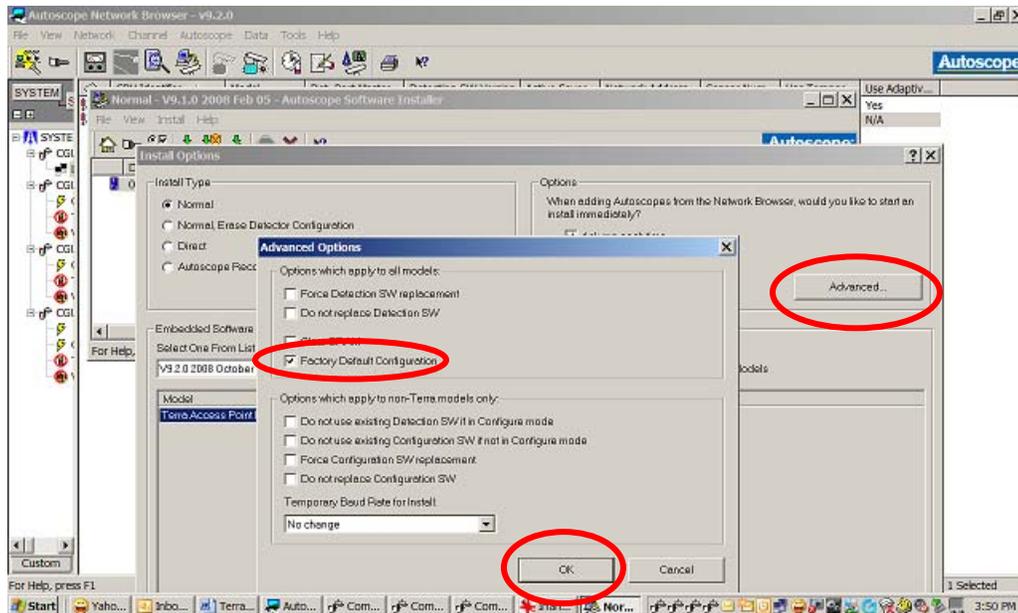

- At the “Install Options” dialog, select [OK] to close this dialog.

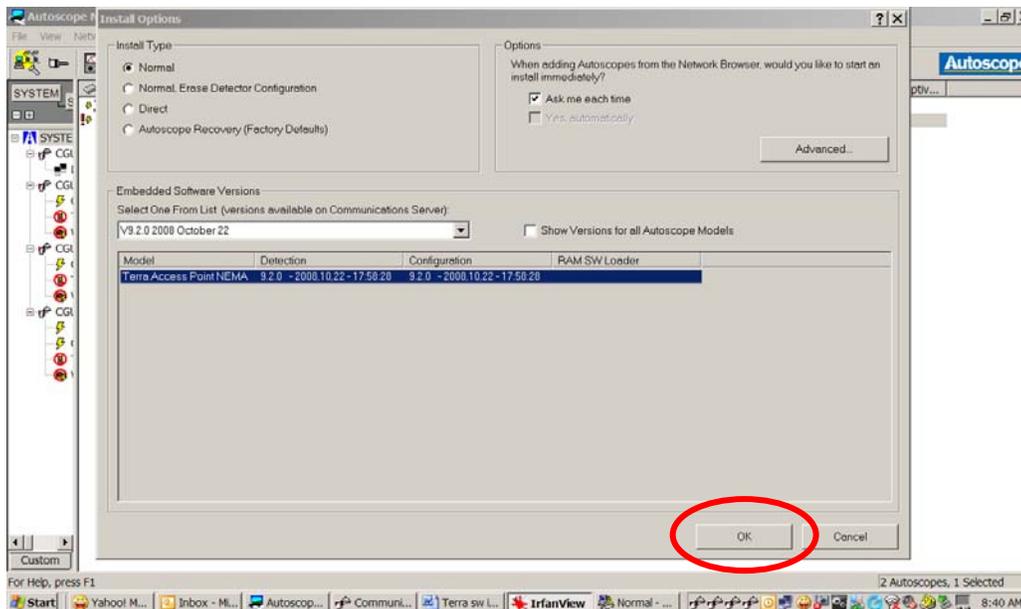




Autoscope®

AN2114: HOW TO— Reset to Factory Default Configuration

8. To start this Normal software-installation process, select the appropriate “Start” options.

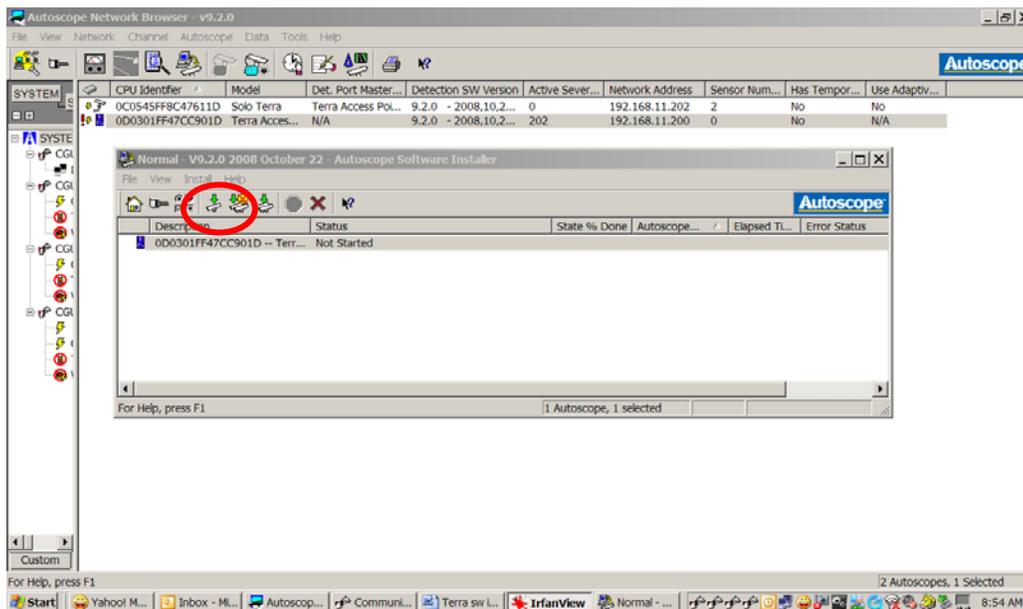

More Information

For assistance, please contact your *Autoscope* representative or Econolite Technical Support at 800-225-6480 x 457, +1.714.630.3700 x457, or Support@Econolite.com.