




On when  
it counts.

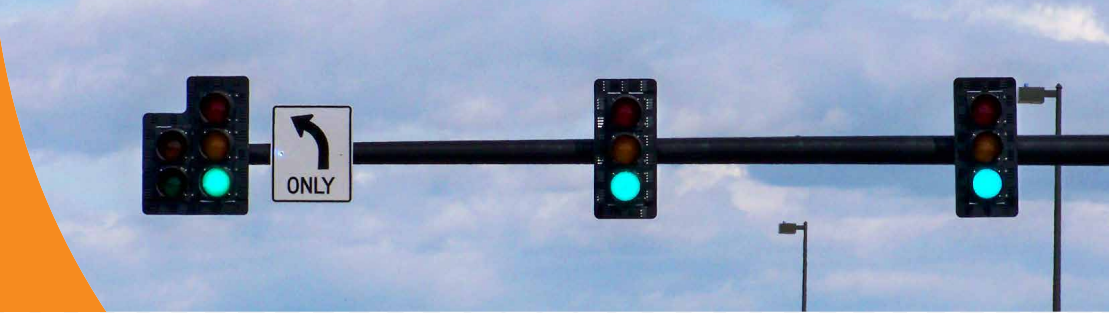

### Electrical Specifications:

**Operating voltage:** Low voltage 10 - 30V DC operation

**Operating temperature:** -40°F to +165°F (-40°C to +74°C)

**Turn-on / Turn-off Time:** < 75 msec

### Features & Benefits

- Polarity protected
- Robust high flux LED technology
- Ideal for solar and battery application
- Standard 8" and 12" modules
- Fully sealed module
- Incandescent appearance
- Abrasion resistant lens coating
- Easy to install into existing signal enclosure
- Polarity marked on wires

- Quick connect terminals with spade/tab adapters
- RF immunity 10V/M, 80MHz to 1Ghz
- Colored wire - Positive; White wire - Negative
- Meets FCC Title 47, Subpart B, Section 15 Regulations for radiated emissions
- Vibration resistant to MIL-STD-883, Test method 2007
- Moisture resistant per MIL-STD-810F, Method 506.4 for rain and blowing rain
- Power supply is conformal coated
- Transient suppression exceeds ITE VTCSH LED requirements
- Meets ITE VTCSH LED Circular Supplement dated 6/27/2005 intensity, color and uniformity over the full temperature range

### Ordering Information

| Part Number                       | Color  | Lens Type | Min. Luminous Intensity* (cd) | Dominant Wavelength (nm) | Typical Wattage @ 25°C |
|-----------------------------------|--------|-----------|-------------------------------|--------------------------|------------------------|
| <b>8" (200mm) Signal Modules</b>  |        |           |                               |                          |                        |
| 433-1110-005XL                    | Red    | Tinted    | 165                           | 625                      | 5                      |
| 433-3130-905XL                    | Yellow | Tinted    | 410                           | 590                      | 6                      |
| 433-2120-005XL                    | Green  | Tinted    | 215                           | 500                      | 7                      |
| 433-2170-005XL                    | Green  | Clear     | 215                           | 500                      | 7                      |
| <b>12" (300mm) Signal Modules</b> |        |           |                               |                          |                        |
| 433-1210-005XL                    | Red    | Tinted    | 365                           | 625                      | 6                      |
| 433-3230-905XL                    | Yellow | Tinted    | 910                           | 590                      | 11                     |
| 433-2220-005XL                    | Green  | Tinted    | 475                           | 500                      | 6                      |
| 433-2270-005XL                    | Green  | Clear     | 475                           | 500                      | 6                      |

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialight.com/Assets/Brochures\\_And\\_Catalogs/Signaling/MDTITEXOD15X001.pdf](http://www.dialight.com/Assets/Brochures_And_Catalogs/Signaling/MDTITEXOD15X001.pdf) Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT.