

Spectra[®], ExSite[®], and Esprit[®] Positioning Systems

REMOTE INSTALLATION/SERVICE TOOLS

Product Features

Remote Data Port (IPS-RDPE-2)

- Designed to Provide Ground Level, Local Interface to Spectra* and ExSite/Esprit Series Systems When Using IPS-CABLE
- Mounts to a Pole or Wall Near Positioning System
- One Remote Data Port is Required Per Positioning System

Remote Monitor Cable (IPS-CABLE)

- Serial Interface Cable for a Windows[®]-Based PC
- Connects to Spectra* Dome Drive or IPS-RDPE-2
- Plugs into Data Port of Spectra Mini Dome System When Used with IPS-MINIADPT Adapter Cable



IPS-RDPE-2
REMOTE DATA PORT



IPS-CABLE
REMOTE MONITOR CABLE

Pelco's remote data port (**IPS-RDPE-2**) and remote monitor cable (**IPS-CABLE**) are field service tools designed to assist in the installation and servicing of Spectra[®], ExSite[®], Esprit[®], or any pan/tilt that uses Pelco's D protocol. Use these tools at the installation site to verify the operation of the PTZ controls, check the address and baud settings, and program the positioning system. Software upgrades[†] also can be performed with Spectra/Spectra Mini domes and ExSite systems.

The **IPS-CABLE** can be connected to a PC or PDA and monitor directly to the RJ-45 port of the **IPS-RDPE-2** or the Spectra dome drive. The **IPS-CABLE** and the supplied software allow full control, setup, and upgrade capabilities. When used with an **IPS-RDPE-2**, the **IPS-CABLE** also allows the user to control pan/tilt/zoom functions and program a Spectra, ExSite, or Esprit positioning system or any other system that accepts Pelco D protocol. It is compatible with most serial cable/connectors for Windows[®]-based PCs.

The **IPS-RDPE-2** remote data port brings all the functionality of the **IPS-CABLE** to ground level. The remote data port works with Spectra, ExSite, and Esprit Series systems. The **IPS-RDPE-2** is compatible with coaxial video and UTP video control systems using Pelco D, Pelco P, or Coaxitron[®] protocols.

The **IPS-MINIADPT** adapter cable can be ordered separately for use with the **IPS-CABLE** shipped prior to the introduction of the Spectra Mini dome system.

*IPS-RDPE-2 and IPS-CABLE are compatible with Spectra III[™] Series and newer model dome systems. Spectra II[®] and previous dome systems do not support these products.

[†]Online software upgrades are available at www.pelco.com.



by Schneider Electric

International Standards
Organization Registered Firm,
ISO 9001 Quality System



C2453 / REVISED 12-2-10

TECHNICAL SPECIFICATIONS

MODELS

IPS-CABLE	Remote monitor cable
IPS-RDPE-2	Remote data port for monitoring at ground level

IPS-CABLE

ELECTRICAL

Connectors	
Receiver	One RJ-45 serial interface connector
Video	One BNC, male connector
Control	One serial DB-9 female connector

GENERAL

Length	48" (122 cm)
--------	--------------

IPS-RDPE-2

ELECTRICAL

Input Voltage	24 VAC
Power Consumption	1 VA

MECHANICAL

Construction	Aluminum
Finish	Gray polyester powder coat
Cable Entry	Two hole plugs; will accommodate 3/4-inch (1.91 cm) conduit
Mount Method	Four 0.375-inch (0.95 cm) holes on mounting plate
Latch	One stainless steel link-lock latch secured with screw; latch also can be secured with padlock (not supplied)

GENERAL


Environment	Indoor/outdoor
Operating Range	-50° to 122°F (-45° to 50°C)
Unit Weight	2.4 lb (1.1 kg)
Shipping Weight	8.0 lb (3.63 kg)

OPTIONAL ACCESSORY

PA402	Pole mount adapter
-------	--------------------

CERTIFICATIONS/RATINGS

- CE, Class B
- FCC, Class B
- UL/cUL Listed
- Meets NEMA Type 4X standards

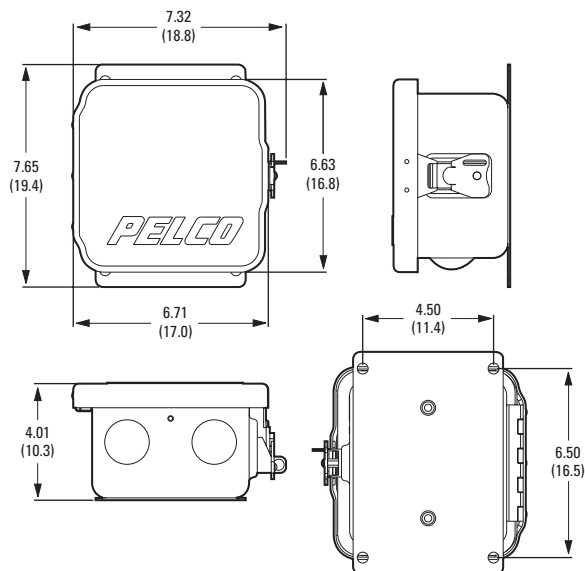

Pelco by Schneider Electric

3500 Pelco Way, Clovis, California 93612-5699 United States

USA & Canada Tel (800) 289-9100 Fax (800) 289-9150

International Tel +1 (559) 292-1981 Fax +1 (559) 348-1120

www.pelco.com

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice. ©Copyright 2010, Pelco, Inc. All rights reserved.