



The RuggedSwitch™ RSG2100P is an industrially hardened, Power Over Ethernet (PoE) enabled, fully managed, modular, Ethernet switch specifically designed to operate reliably in electrically harsh and climatically demanding utility substation and industrial environments. The RSG2100P's superior ruggedized hardware design coupled with the RuggedSwitch™ Operating System (ROS) provides improved system reliability and advanced networking features making it ideally suited for creating Ethernet networks for mission-critical, real-time, control applications.

The RSG2100P comes standard with 4 10/100BaseTX 802.3af (PoE) compliant Ethernet ports and offers modular flexibility of up to 15 additional Ethernet ports including 10BaseFL /100BaseFX/ 1000BaseX fiber and 10/100/ 1000BaseTX copper port combinations. The RSG2100P is highly versatile and can support multiple fiber types and connectors (ST, MTRJ, LC, SC) without loss of port density.

The RSG2100P is an ideal solution to power and connect several Ethernet devices (such as IP phones, video cameras, and wireless access points) where AC power is not available or cost-prohibitive to provide locally.

Features and Benefits

Power Over Ethernet (PoE)

- 4 10/100BaseTx 802.3af compliant ports
- Data and power over a single Ethernet cable
- Powered from the internal 48VDC source
- No mid-span patch panel required
- Fully compatible with 802.3af powered devices
- Auto-sensing ports that provide power only to PoE end devices
- Power to port is turned off if cables are removed

Additional Ethernet Ports

- up to 3-Gigabit Ethernet ports - copper and/or fiber
- up to 12-Fast Ethernet ports - copper and/or fiber
- Many fiber and connector options

Cyber Security Features

- Multi-level user passwords
- SSH/SSL encryption
- Enable/disable ports, MAC based port security
- Port based network access control (802.1x)
- VLAN (802.1q) to segregate and secure network traffic
- Radius centralized password management
- SNMPv3 encrypted authentication and access security

RuggedRated™ for Reliability in Harsh Environments

- Immunity to EMI and heavy electrical surges
 - Meets IEEE 1613 (electric utility substations)
 - Exceeds IEC 61850-3 (electric utility substations)
 - Exceeds IEEE 61800-3 (variable speed drive systems)
 - Exceeds IEC 61000-6-2 (generic industrial)
 - Exceeds NEMA TS-2 (traffic control equipment)
- -40 to +85°C operating temperature (no fans)
- Conformal coated printed circuit boards (optional)
- 18 AWG galvanized steel enclosure

Rugged Operating System (ROS™) Features

- All the same features as the RSG2100
- Enhanced Rapid Spanning Tree (eRSTP™)
- Quality of Service (802.1p) for real-time traffic
- VLAN (802.1q) with double tagging and GVRP support
- Link aggregation (802.3ad)
- IGMP Snooping for multicast filtering

Management Tools

- Web-based, Telnet, CLI management interfaces
- SNMP v1/v2/v3
- Remote Monitoring (RMON)
- Rich set of diagnostics with logging and alarms

Universal Power Supply Options

- Fully integrated power supplies
- PoE power supply: 48VDC
- Unit power supply: 24VDC (9-36VDC), 48VDC (36-59VDC), or 88-300VDC/85-264VAC
- Screw or pluggable terminal blocks
- Terminal blocks for reliable maintenance free connections
- CSA/UL 60950 safety approved to +85°C



RuggedSwitch™ RSG2100P

Modularity:

- ▶ 10 available slots
- ▶ Up to 16 Fast Ethernet ports & 3 Gigabit ports
- ▶ Dual and single port modules



Modularity (8x2)

Modular HMI:

- ▶ Front or Rear Mount



Mounting Options

- ▶ Panel/Din Rail
- ▶ 19" Rack Mount
- ▶ Front or Rear Mount

Fast Ethernet Ports Types:

- ▶ up to 16 Fast Ethernet Ports
- ▶ virtually any mix of fiber or copper desired
- ▶ 10/100TX RJ45
- ▶ 10FL Multimode
- ▶ 100FX Multi- and Singlemode

Gigabit Port Types:

- ▶ up to 3 Gigabit Ethernet Ports
- ▶ 10/100/1000 TX RJ45
- ▶ 1000SX Multimode
- ▶ 1000LX Singlemode
- ▶ Pluggable Optics (SFP)
- ▶ SC, ST, LC and MTRJ

Power Over Ethernet (PoE):

- ▶ 4 10/100BaseTx Ports
- ▶ 802.3af Compliant Ports
- ▶ Auto-sensing

Integrated Power Supply

- ▶ Universal high-voltage range: 88-300VDC or 85-264VAC
- ▶ Popular low voltage DC ranges: 24VDC (9-36VDC), 48VDC (36-59VDC)
- ▶ Separate 48VDC PoE Power Supply
- ▶ Screw or pluggable terminal blocks available

Operating Temperature

- ▶ -40°C to +85°C
- ▶ No Fans

Critical Alarm Relay

- ▶ Form-C contact ratings:
Max Voltage 250VAC, 125VDC
Max Current 2A@250VAC,
2A@30VDC



ROS™ Features

Cyber Security

Cyber security is an urgent issue in many industries where advanced automation and communications networks play a crucial role in mission critical applications and where high reliability is of paramount importance. Key ROS™ features that address security issues at the local area network level include:

- **Passwords** - Multi-level user passwords secures switch against unauthorized configuration
- **SSH / SSL** - Extends capability of password protection to add encryption of passwords and data as they cross the network
- **Enable / Disable Ports** - Capability to disable ports so that traffic can not pass
- **802.1q VLAN** - Provides the ability to logically segregate traffic between predefined ports on switches
- **MAC Based Port Security** - The ability to secure ports on a switch so only specific Devices / MAC addresses can communicate via that port
- **802.1x Port Based Network Access Control** - The ability to lock down ports on a switch so that only authorized clients can communicate via this port
- **Radius** - Provides centralized password management
- **SNMPv3** - encrypted authentication and access security

The ROS™ cyber security features are included to help address the various industry specific security standards such as NERC CIP, ISA S99, AGA 12, IEC 62443, ISO 17799:2005 and PCSRF SPP-ICS.

Enhanced Rapid Spanning Tree Protocol (eRSTP™)

RuggedCom eRSTP allows the creation of fault-tolerant ring and mesh Ethernet networks that incorporate redundant links that are 'pruned' to prevent loops. eRSTP yields worst-case fault recovery¹ of 5ms times the 'bridge diameter' and allows rings of up to 80 switches. For example, a ring of ten switches will have fault recovery times under 50ms. eRSTP implements both STP and RSTP to ensure interoperability with commercial switches unlike other proprietary 'ring' solutions.

Quality of Service (IEEE 802.1p)

Some networking applications such as real-time control or VoIP (voice over IP) require predictable arrival times for Ethernet frames. Switches can introduce latency in times of heavy network traffic due to the internal queues that buffer frames and then transmit on a first come first serve basis. ROS™ supports 'Class of Service' in accordance with IEEE 802.1p that allows time critical traffic to jump ahead to the front of the queue thus minimizing latency and reducing jitter to allow such demanding applications to operate correctly. ROS™ allows priority classification by port, tags, MAC address, and IP type of service (TOS).

A configurable "weighted fair queuing" algorithm controls how frames are emptied from the queues.

VLAN (IEEE 802.1q)

Virtual local area networks (VLAN) allow the segregation of a physical network into separate logical networks with independent broadcast domains. A measure of security is provided since hosts can only access other hosts on the same VLAN and traffic storms are isolated. ROS™ supports 802.1q tagged Ethernet frames and VLAN trunks. Port based classification allows legacy devices to be assigned to the correct VLAN. GVRP support is also provided to simplify the configuration of the switches on the VLAN.

Link Aggregation (802.3ad)

The link aggregation feature provides the ability to aggregate several Ethernet ports into one logical link (port trunk) with higher bandwidth. This provides an inexpensive way to set up a high speed backbone to improve network bandwidth. This feature is also known as "port trunking", "port bundling", "port teaming", and "ethernet trunk".

IGMP Snooping

ROS uses IGMP snooping (Internet Group Management Protocol v1&v2) to intelligently forward or filter multicast traffic streams (e.g. MPEG video) to or from hosts on the network. This reduces the load on network trunks and prevents packets from being received on hosts that are not involved. ROS™ has a very powerful implementation of IGMP snooping that:

- Can be enabled on a per VLAN basis.
- Detects and filters all multicast streams regardless of whether subscribers exist.
- Supports "router-less" operation by supporting an "active" mode.
- Restores traffic streams immediately after an RSTP topology change.

SNMP (Simple Network Management Protocol)

SNMP provides a standardized method for network management stations the ability to interrogate devices from different vendors. SNMP versions supported by ROS™ are v1, v2c, and v3. SNMPv3 in particular provides security features (such as authentication, privacy, and access control) not present in earlier SNMP versions. ROS™ also supports numerous standard MIBs (Management Information Base) allowing for easy integration with any network management system (NMS).

¹ eRSTP fault recovery times may be approximated as follows:

For 100 Mbps, fault recovery performance is <5ms/hop

For 1,000 Mbps, fault recovery performance is <5ms/hop + 20ms

ROS™ Features

SNMP (Simple Network Management Protocol) (cont'd)

A feature of SNMP supported by ROS™ is the ability to generate "traps" upon system events. A NMS can record traps from multiple devices providing a powerful network troubleshooting tool. RuggedVue™ is RuggedCom's NMS that provides graphical visualization of the network and is fully integrated with all RuggedCom products.

SNTP (Simple Network Time Protocol)

SNTP automatically synchronizes the internal clock of all ROS™ devices on the network. This allows for correlation of time stamped events for troubleshooting.

SCADA and Industrial Automation

ROS™ contains features that optimize network performance and simplify switch management based on the unique requirements found in SCADA and industrial automation applications. Features such as Modbus TCP management for retrieval of switch data using the ubiquitous Modbus protocol and DHCP Option 82, a Rockwell Automation ODVA requirement for IP address assignment based on the location of the end device, provide capabilities not found in typical "commercial" or "office grade" Ethernet switches.

Port Based Network Access Control (802.1x)

ROS™ supports the IEEE 802.1x standard that defines a mechanism for port-based network access control which provides a means of authenticating and authorizing devices attached to LAN ports.

Port Rate Limiting

ROS™ supports configurable rate limiting per port to limit unicast and multicast traffic. This can be essential to managing precious network bandwidth for service providers. It also provides edge security for denial of service (DOS) attacks.

Broadcast Storm Filtering

Broadcast storms wreak havoc on a network and can cause attached devices to malfunction. This could be disastrous on a network with mission critical equipment. ROS™ limits this by filtering broadcast frames with a user-defined threshold.

Loss of Link Management

Some intelligent electronic devices (IEDs) have dual fiber optic ports with automatic failover to a backup port should the primary fail. ROS™ ensures this mechanism works reliably under all failure modes by appropriately disabling link signals when required. ROS™ also flushes learned MAC addresses to ensure the failover occurs quickly.

Port Mirroring

ROS™ can be configured to duplicate all traffic on one port to a designated mirror port. When combined with a network analyzer, this can be a powerful troubleshooting tool.

Port Configuration and Status

ROS™ allows individual ports to be 'hard' configured for speed, duplex, auto-negotiation, flow control and more. This allows proper connection with devices that do not negotiate or have unusual settings. Detailed status of ports with alarm and SNMP trap on link problems aid greatly in system troubleshooting.

Port Statistics and RMON (Remote Monitoring)

ROS™ provides continuously updating statistics per port that provide both ingress and egress packet and byte counters as well as detailed error figures. Also provided is full support for the RMON statistics, history, alarms, and event groups. RMON allows for very sophisticated data collection, analysis and detection of traffic patterns.

Event Logging and Alarms

ROS™ records all significant events to a non-volatile system log allowing forensic troubleshooting. Events include link failure and recovery, unauthorized access, broadcast storm detection, and self-test diagnostics among others. Alarms provide a snapshot of recent events that have yet to be acknowledged by the network administrator. An external hardware relay is de-energized during the presence of critical alarms allowing an external controller to react if desired.

HTML Web Browser and Telnet User Interfaces

ROS™ provides a simple, intuitive user interface for configuration and monitoring via a standard graphical web browser or via Telnet. All system parameters include detailed on-line help to make setup a breeze. ROS™ , presents a common look and feel and standardized configuration process allowing easy migration to other RuggedCom managed products.

Configuration via ASCII Text File

All configuration parameters are stored in an ASCII formatted text file that can easily be transferred via TFTP or Xmodem. The configuration file can be saved for backup purposes and easily manipulated by a text editor. The same text file can be downloaded to the switch at a later date in order to re-configure or restore a previous configuration.

Command Line Interface (CLI)

A command line interface can be used in conjunction with remote shell to automate data retrieval, configuration updates, and firmware upgrades. A powerful SQL-like capability allows expert users the ability to selectively retrieve or manipulate any parameters the device has to offer.

EMI and Environmental Type Tests

| IEC 61850-3 EMI TYPE TESTS | | | | |
|----------------------------|-----------------------------|---------------------------------|--|-----------------|
| TEST | Description | | Test Levels | Severity Levels |
| IEC 61000-4-2 | ESD | Enclosure Contact | +/- 8kV | 4 |
| | | Enclosure Air | +/- 15kV | 4 |
| IEC 61000-4-3 | Radiated RFI | Enclosure ports | 20 V/m | x |
| IEC 61000-4-4 | Burst (Fast Transient) | Signal ports | +/- 4kV @ 2.5kHz | x |
| | | D.C. Power ports | +/- 4kV | 4 |
| | | A.C. Power ports | +/- 4kV | 4 |
| | | Earth ground ports ³ | +/- 4kV | 4 |
| IEC 61000-4-5 | Surge | Signal ports | +/- 4kV line-to-earth, +/- 2kV line-to-line | 4 |
| | | D.C. Power ports | +/- 2kV line-to-earth, +/- 1kV line-to-line | 3 |
| | | A.C. Power ports | +/- 4kV line-to-earth, +/- 2kV line-to-line | 4 |
| IEC 61000-4-6 | Induced (Conducted) RFI | Signal ports | 10V | 3 |
| | | D.C. Power ports | 10V | 3 |
| | | A.C. Power ports | 10V | 3 |
| | | Earth ground ports ³ | 10V | 3 |
| IEC 61000-4-8 | Magnetic Field | Enclosure ports | 40 A/m continuous, 1000 A/m for 1 s | N/A |
| IEC 61000-4-29 | Voltage Dips & Interrupts | D.C. Power ports | 30% for 0.1s, 60% for 0.1s, 100% for 0.05s | N/A |
| IEC 61000-4-11 | | A.C. Power ports | 30% for 1 period, 60% for 50 periods | N/A |
| IEC 61000-4-12 | Damped Oscillatory | Signal ports | 100% for 5 periods, 100% for 50 periods ² | N/A |
| | | D.C. Power ports | 2.5kV common, 1kV diff. mode@1MHz | 3 |
| | | A.C. Power ports | 2.5kV common, 1kV diff. mode@1MHz | 3 |
| IEC 61000-4-16 | Mains Frequency Voltage | Signal ports | 30V Continuous, 300V for 1s | 4 |
| | | D.C. Power ports | 30V Continuous, 300V for 1s | 4 |
| IEC 61000-4-17 | Ripple on D.C. Power Supply | D.C. Power ports | 10% | 3 |
| IEC 60255-5 | Dielectric Strength | Signal ports | 2kVac (Fail-Safe Relay output) | N/A |
| | | D.C. Power ports | 2kVac | N/A |
| | | A.C. Power ports | 2kVac | N/A |
| IEC 60255-5 | H.V. Impulse | Signal ports | 5kV (Fail-Safe Relay output) | N/A |
| | | D.C. Power ports | 5kV | N/A |
| | | A.C. Power ports | 5kV | N/A |

| IEEE 1613 (C37.90.x) EMI IMMUNITY TYPE TESTS | | | | |
|--|---------------------|---------------------------------|-----------------------------------|-----------------|
| Test | Description | | Test Levels | Severity Levels |
| IEEE C37.90.3 | ESD | Enclosure Contact | +/- 8kV | N/A |
| | | Enclosure Air | +/- 15kV | N/A |
| IEEE C37.90.2 | Radiated RFI | Enclosure ports | 35 V/m | N/A |
| IEEE C37.90.1 | Fast Transient | Signal ports | +/- 4kV @ 2.5kHz | N/A |
| | | D.C. Power ports | +/- 4kV | N/A |
| | | A.C. Power ports | +/- 4kV | N/A |
| | | Earth ground ports ³ | +/- 4kV | N/A |
| IEEE C37.90.1 | Oscillatory | Signal ports | 2.5kV common mode @1MHz | N/A |
| | | D.C. Power ports | 2.5kV common, 1kV diff. mode@1MHz | N/A |
| | | A.C. Power ports | 2.5kV common, 1kV diff. mode@1MHz | N/A |
| IEEE C37.90 | H.V. Impulse | Signal ports | 5kV (Fail-Safe Relay output) | N/A |
| | | D.C. Power ports | 5kV | N/A |
| | | A.C. Power ports | 5kV | N/A |
| IEEE C37.90 | Dielectric Strength | Signal ports | 2kVac | N/A |
| | | D.C. Power ports | 2kVac | N/A |
| | | A.C. Power ports | 2kVac | N/A |

| Environmental Type Tests | | | | |
|--------------------------|------------------------------|----------|--------------------------------------|-----------------|
| Test | Description | | Test Levels | Severity Levels |
| IEC 60068-2-1 | Cold Temperature | Test Ad | -40°C, 16 Hours | N/A |
| IEC 60068-2-2 | Dry Heat | Test Bd | +85°C, 16 Hours | N/A |
| IEC 60068-2-30 | Humidity (Damp Heat, Cyclic) | Test Db | 95% (non-condensing), 55°C, 6 cycles | N/A |
| IEC 60255-21-1 | Vibration | Tests Fc | 2g @ (10 - 150) Hz | Class 2 |
| IEC 60255-21-2 | Shock | Tests Ea | 30g @ 11mS | Class 2 |

Notes:

- Only applicable to functional earth connections separated from the safety earth connection.
- Class 2 refers to "Measuring relays and protection equipment for which a very high security margin is required or where the vibration levels are very high, (e.g. shipboard application and for severe transportation conditions")

Technical Specifications

Power Supply

- Power Consumption: 28W Max
- 24VDC: 9-36 VDC, 1.2A
- 48VDC: 36-59 VDC, 0.6A
- HI Voltage AC/DC: 88-300VDC or 85-264VAC
- PoE Power Supply - 48VDC: 36-59VDC, 0.6A

Critical Alarm Relay

- Form-C contact ratings:
 - Max Voltage 250VAC, 125VDC
 - Max Current 2A@250VAC, 2A@30VDC

Physical

- Height: 1.74"
- Width: 18.3"
- Depth: 12.4"
- Weight: 5.2kg
- Ingress Protection: IP40 (1mm objects)
- Enclosure: 18 AWG galvanized steel enclosure
- Mounting: DIN rail or panel mounted

Switch Properties

- Switching method: Store & Forward
- Switching latency: 7 us
- Switching bandwidth: 9.2 Gbps
- MAC addresses: 8192
- MAC address table size: 64kbytes
- Priority Queues: 4
- Frame buffer memory: 2 Mbit
- VLANs: 4094
- IGMP multicast groups: 256
- Port rate limiting
- No head of line blocking

Approvals

- ISO: Designed and manufactured using a ISO9001: 2000 certified quality program
- CE Marking
- Emissions: FCC Part 15 (Class A),
EN55022 (CISPR22 Class A)
- Safety: cCSAus (Compliant with CSA C22.2 No. 60950,
UL 60950, EN60950)
- Laser Eye Safety (FDA/CDRH): Complies with 21
CFR Chapter1, Subchapter J.

Warranty

- 5 Years - Applicable to design and manufacturing related product defects.

Network Management

- HTTP graphical web-based
- SNMP v1, v2c, v3
- Telnet, VT100
- Command Line Interface (CLI)

EMI Immunity and Environmental Compliance

- IEC 61000-6-2 Industrial (Generic)
- IEC 61800-3 Industrial (Variable Speed Drive Systems)
- IEC 61850-3 Electric Utility Substations
- IEEE 1613 Electric Utility Substations
- NEMA TS 2 Traffic Control Equipment (Pending)

IEEE Compliance

- 802.3-10BaseT
- 802.3u-100BaseTX, 100BaseFX
- 802.3x-Flow Control
- 802.3z-1000BaseLX
- 802.3ab-1000BaseTX
- 802.3ad-Link Aggregation
- 802.3af-Power Over Ethernet (PoE)
- 802.1d-MAC Bridges
- 802.1d-Spanning Tree Protocol
- 802.1p-Class of Service
- 802.1q-VLAN Tagging
- 802.1w-Rapid Spanning Tree Protocol
- 802.1x-Port Based Network Access Control


IETF RFC Compliance

- RFC768-UDP
- RFC783-TFTP
- RFC791-IP
- RFC792-ICMP
- RFC793-TCP
- RFC826-ARP
- RFC854-Telnet
- RFC894-IP over Ethernet
- RFC1112-IGMP v1
- RFC1519-CIDR
- RFC1541-DHCP (client)
- RFC2030-SNTP
- RFC2068-HTTP
- RFC2236-IGMP v2
- RFC2284-EAP
- RFC2475-Differentiated Services
- RFC2865-Radius
- RFC3414-SNMPv3-USM
- RFC3415-SNMPv3-VACM

IETF SNMP MIBS


- RFC1493-BRIDGE-MIB
- RFC1907-SNMPv2-MIB
- RFC2012-TCP-MIB
- RFC2013-UDP-MIB
- RFC2578-SNMPv2-SMI
- RFC2579-SNMPv2-TC
- RFC2819-RMON-MIB
- RFC2863-IF-MIB
- draft-ietf-bridge-rstpmib-03-BRIDGE-MIB
- draft-ietf-bridge-bridgemib-smiv2-03-RSTP-MIB
- IANAifType-MIB

Dimensions

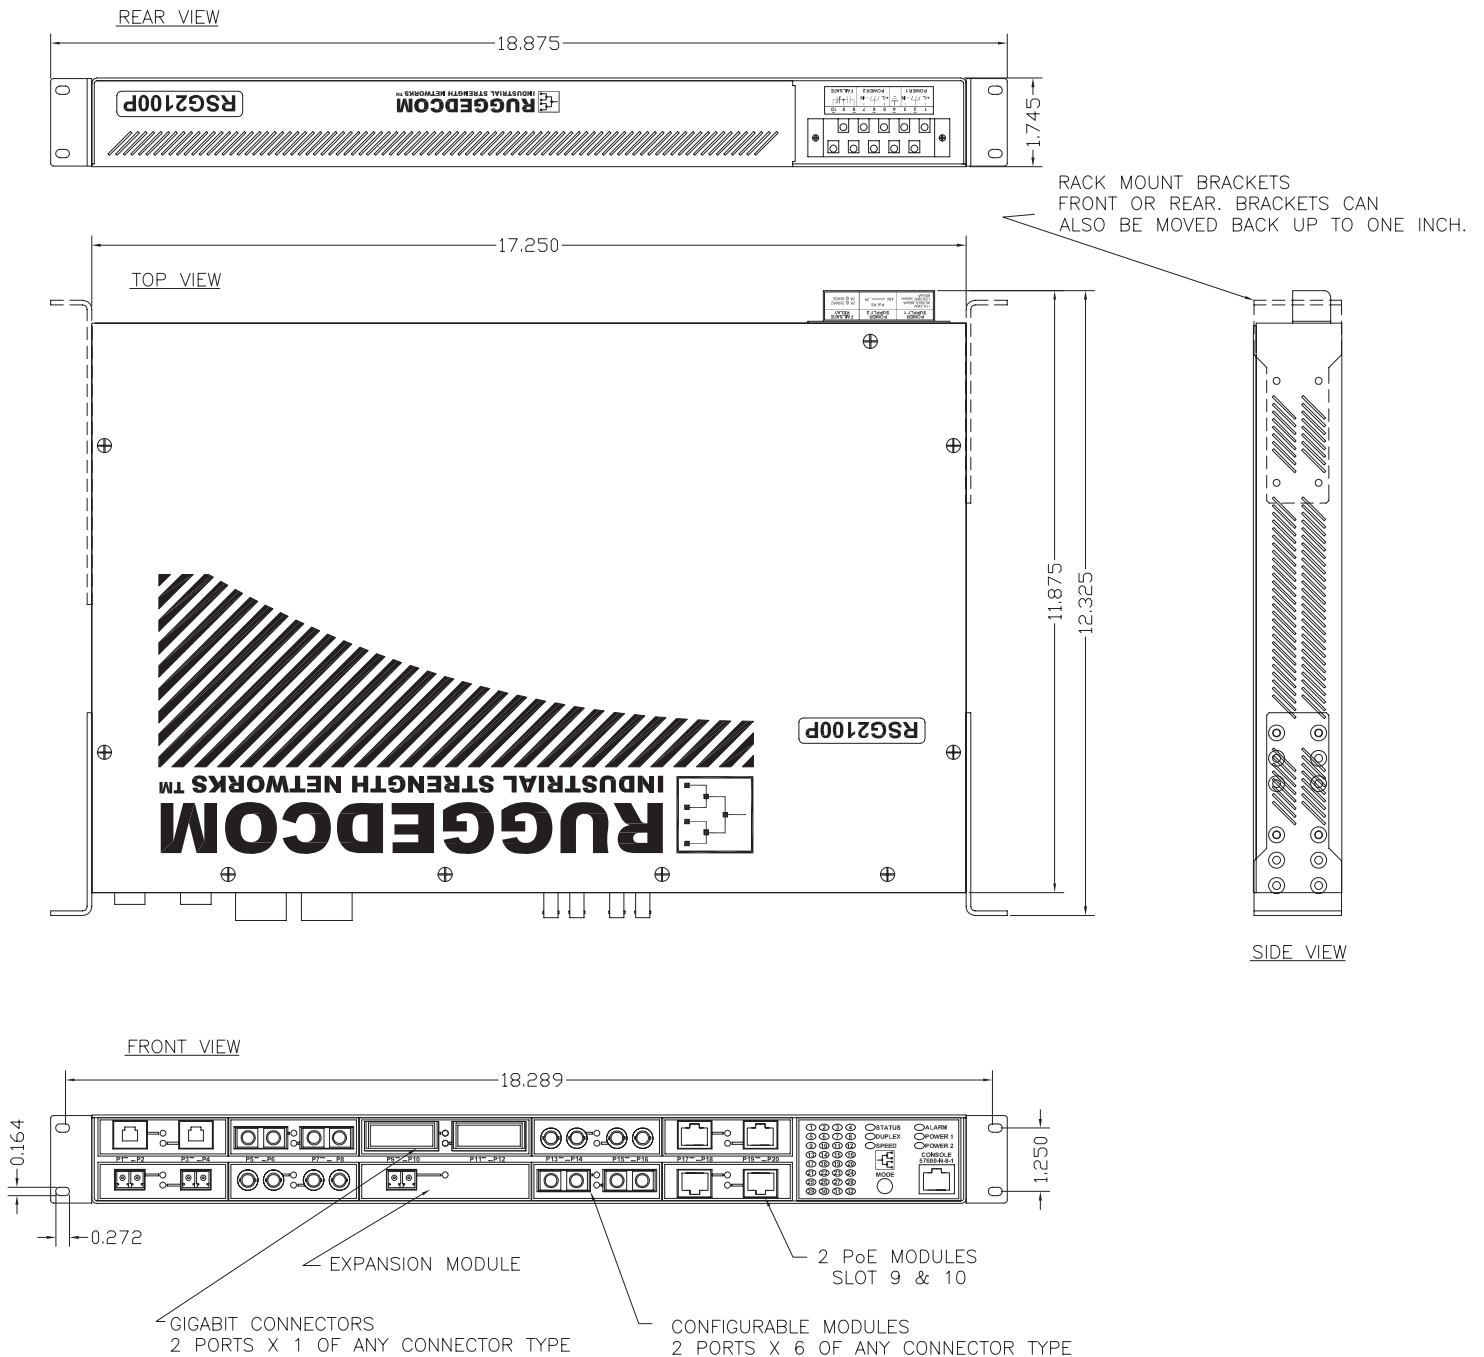

Mounting Options

Rack Mount - (Connectors At Front)



FRONT VIEW




REAR VIEW

Rack Mount - (Connectors At Rear)




FRONT VIEW




REAR VIEW

| | | | | | |
|--------|--------|--------|--------|---------|----------|
| Slot 1 | Slot 3 | Slot 5 | Slot 7 | Slot 9 | RSG2100P |
| Slot 2 | Slot 4 | Slot 6 | Slot 8 | Slot 10 | |

Panel / DinRail Mount - (Connectors At Bottom)

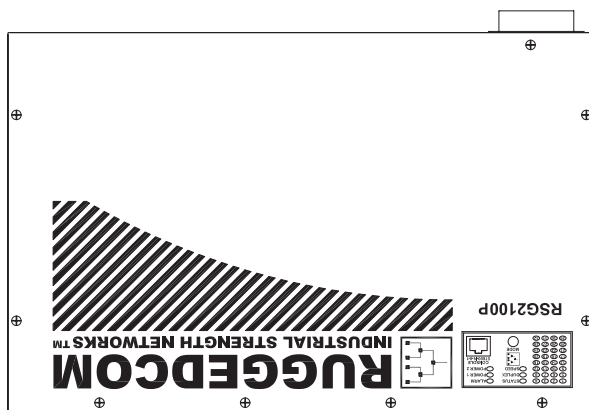

FRONT VIEW




BOTTOM VIEW

Panel / DinRail Mount - (Connectors At Top)



TOP VIEW

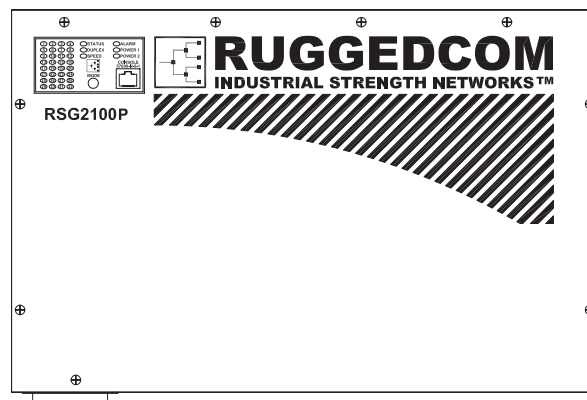

FRONT VIEW

Order Codes

RSG2100P - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____
 Main Mount PS1 S1 S2 S3 S4 S5 S6 S7 S8

| | | | | | |
|--------|--------|--------|--------|---------|----------|
| Slot 1 | Slot 3 | Slot 5 | Slot 7 | Slot 9 | RSG2100P |
| Slot 2 | Slot 4 | Slot 6 | Slot 8 | Slot 10 | |

Main: Ethernet and Power Connectors

- R = Ethernet on rear; LED panel on front; power connector on rear
- F = Ethernet on front; LED panel on front; power connector on rear
- B = Ethernet on rear; LED panel on top; power connector on rear
- T = Ethernet on front; LED panel on top; power connector on rear

Mount: Mounting Options

- RM = 19" Rack Mount Kit
- DP = DIN and Panel Mount Kit
- RD = 19" Rack, DIN, and Panel Mount Kit
- 00 = No Mounting Option

PS1: Unit Power Supply*

- 24 = 24VDC (9-36VDC), screw terminal block
- 48 = 48VDC (36-59VDC), screw terminal block
- HI = 88-300VDC or 85-264VAC, screw terminal block
- 24P = 24VDC (9-36VDC), pluggable terminal block
- 48P = 48VDC (36-59VDC), pluggable terminal block
- HIP = 88-300VDC or 85-264VAC, pluggable terminal block

*Note: 48VDC PoE power supply included

S1, S2, S3, S4, S7 and S8:

Ethernet Modules for Slots 1, 2, 3, 4, 7 and 8

- XXXX = Empty
- TX01 = 2 x 10/100Tx RJ45
- FL01 = 2 x 10FL - Multimode, 850nm, ST
- FX01 = 2 x 100FX - Multimode, 1300nm, ST
- FX02 = 2 x 100FX - Multimode, 1300nm, SC
- FX11 = 2 x 100FX - Multimode, 1300nm, LC
- FX03 = 2 x 100FX - Multimode, 1300nm, MTRJ
- FX04 = 2 x 100FX - Singlemode, 1300nm, ST, 20km
- FX05 = 2 x 100FX - Singlemode, 1300nm, SC, 20km
- FX06 = 2 x 100FX - Singlemode, 1300nm, LC, 20km
- FX07 = 2 x 100FX - Singlemode, 1300nm, SC, 50km
- FX08 = 2 x 100FX - Singlemode, 1300nm, LC, 50km
- FX09 = 2 x 100FX - Singlemode, 1300nm, SC, 90km
- FX10 = 2 x 100FX - Singlemode, 1300nm, LC, 90km

S5: Gigabit Ethernet Modules for slot 5

- XXXX = Empty
- CG01 = 2 x 10/100/1000Tx RJ45
- FG01 = 2 x 1000SX - Multimode, 850nm, LC, 500m
- FG02 = 2 x 1000LX - Singlemode, 1300 nm, SC connectors, 10km
- FG03 = 2 x 1000LX - Singlemode, 1300 nm, LC connectors, 10km
- FG04 = 2 x 1000LX - Singlemode, 1300 nm, SC connectors, 25km
- FG05 = 2 x 1000LX - Singlemode, 1300 nm, LC connectors, 25km
- FG50 = 2 x 1000LX SFP - Blank (no optical transceiver)
- FG51 = 2 x 1000LX SFP - Multimode, 850nm, LC, 500m
- FG52 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 10km
- FG53 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 25km
- FG54 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 70km
- FG70 = 2 x 1000LX GBIC - Blank (no optical transceiver)
- FG71 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km
- FG72 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km
- FG73 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 70km

S6: Gigabit Ethernet Modules for slot 6

- XXXXX = Empty
- 1CG01 = 1 x 10/100/1000Tx RJ45
- 1FG01 = 1 x 1000SX - Multimode, 850nm, LC, 500m
- 1FG02 = 1 x 1000LX - Singlemode, 1300 nm, SC connectors, 10km
- 1FG03 = 1 x 1000LX - Singlemode, 1300 nm, LC connectors, 10km
- 1FG04 = 1 x 1000LX - Singlemode, 1300 nm, SC connectors, 25km
- 1FG05 = 1 x 1000LX - Singlemode, 1300 nm, LC connectors, 25km
- 1FG50 = 1 x 1000LX SFP - Blank (no optical transceiver)
- 1FG51 = 1 x 1000LX SFP - Multimode, 850nm, LC, 500m
- 1FG52 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 10km
- 1FG53 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 25km
- 1FG54 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 70km ⁽²⁾
- 1FG70 = 1 x 1000LX GBIC - Blank (no optical transceiver)
- 1FG71 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km
- 1FG72 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km
- 1FG73 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 70km ⁽²⁾

*Note: Slots 9 and 10 are used for the 4 10/100BaseTX PoE ports.

NOTES:

¹ Distance ratings are typical but will depend on type of cabling, number of connectors and splices.

² These transceivers have an operating temperature range of -20 °C to +85°C.

Example Order Codes:

RSG2100P-R-RM-24-TX01-TX01-XXXX-XXXX-XXXX-XXXX-XXXX-XXXX

19" Rack mounted, 24VDC power supply, 48VDC PoE power supply, 4 10/100 RJ45 PoE Ethernet ports, 4 10/100 RJ45 Ethernet Ports, with Ethernet ports on the rear

RSG2100P-F-RM-48-TX01-TX01-FX01-FX01-XXXX-XXXX-XXXX-XXXX

19" Rack mounted, 48VDC power supply, 48VDC PoE power supply, 4 10/100 RJ45 PoE Ethernet ports, 4 10/100 RJ45 Ethernet Ports, 4 100FX (Multimode 850nm Fiber) Ethernet ports, with Ethernet ports on the front

RSG2100P-R-RM-HI-TX01-TX01-FX01-FX01-FG02-XXXXXX-FX01-FX01

19" Rack mounted, HI power supply, 48VDC PoE power supply, 4 10/100 RJ45 PoE Ethernet ports, 4 10/100 RJ45 Ethernet Ports, 8 100FX (Multimode 850nm Fiber) Ethernet ports, 2 1000FX (Gigabit) Ethernet ports, with Ethernet ports on the front

Accessories/Options

- 82-01-0002 - Conformal Coating
- 41-11-0011 - Cable support brackets (two)
- 43-10-0007 - Power cable (North America three prong connector -> beau)

RuggedCom Inc.
30 Whitmore Road
Woodbridge, Ontario, Canada L4L 7Z4
Tel: (905) 856-5288 **Fax:** (905) 856-1995
Toll Free: (888) 264-0006
Technical Support Center: (866) 922-7975 or (954) 922-7975

© 2006 RuggedCom Inc.
RuggedSwitch is a trademark of RuggedCom Inc.
Ethernet is a trademark of the Xerox Corporation.
Patent Pending
All specifications in this document are subject to change without notice.

For additional information on our products and services, please visit our web site at: www.ruggedcom.com

Rev 1-E