

DECORATIVE SPUN CONCRETE POLES



King Luminaire • StressCrete • Est. 1953

**STRESSCRETE
GROUP**

Quality People • Quality Products



Contents

Decor Colors2

The Americana Series

 The Alexander 3 - 4

 The Beaumont 5 - 8

 The Belmont 9 - 10

 The California 11 - 12

 The Canterbury 13 - 14

 The Centennial 15 - 16

 The Classic 17 - 18

 The Ionic 19 - 20

 The Kensington 21 - 22

 The Lorraine 23 - 24

 The Memphis 25 - 26

 The Pacific 27 - 28

 The Sheridan 29 - 30

 The St. Louis 31 - 32

 The Talisman 33 - 34

 The Traditional 35 - 36

 The Washington 37 - 38

 The Windsor 39 - 40

The Symmetry Series

 Round Tapered 41

 Octagonal Tapered 42

 Hexagonal Tapered 43

 Square Non Tapered 44

 Square Tapered 45

 Fluted Tapered 46

Concrete Bollards

 Concrete Bollards 47 - 48

 Bollards Mounting Options 49 - 50

The StressCrete Group

The StressCrete Group is comprised of five manufacturing facilities across North America, producing high quality decorative outdoor lighting fixtures, decorative concrete and metal poles, as well as a line of site furnishings. We also produce a vast range of spun concrete utility, transmission, sports lighting and specialty poles for the electrical communication and utilities industry. Our products are environmentally friendly and many of them help contribute credits to LEED® certified projects.

Established in 1953, StressCrete is the oldest, most experienced manufacturer of spun concrete poles in North America. We now offer the broadest most diverse range of spun concrete poles in the industry, and continue to produce new and innovative products.

King Luminaire produces a comprehensive line of high performance outdoor luminaires, poles manufactured from iron, steel, or aluminum, as well as site amenities. This product offering, combined with StressCrete's line of concrete poles has helped make our group a North American leader in the outdoor lighting industry.

Objective

It is our objective to offer the highest level of customer service, technical expertise and product quality to our customers, achieved through the dedication to our Gold Standards. Our commitment to constant innovation has resulted in a state-of-the-art manufacturing process, as well as leading edge technology in our products.

Products

Our product is a centrifugally cast reinforced concrete pole, commonly referred to as a "spun pole". It combines elegance with durability and surpasses most other materials in the economy. It meets ASTM and CSA standards for spun concrete poles, as well as our own more demanding specifications. The spinning process introduces qualities into the concrete which cannot be obtained by more conventional casting methods. It provides a higher density and stronger concrete, while at the same time forming a hollow raceway inside the pole, thereby providing a smooth conduit for electrical cables.

All of our poles are custom made. Production is geared to each individual order's specification and most cost effective method. Poles are readily available in a full range of lengths, strengths, colors, finishes and cross-sections for a multitude of uses, including lighting, power distribution, transmission, traffic, traction, camera, and siren poles. All poles may be equipped with a galvanized steel base plate, although direct embedment is the most cost effective.

Advantages:

- cost effective
- long service life
- minimal maintenance
- aesthetically pleasing
- wide variety of colors & textures
- minimal vibration and deflection
- ease of installation
- environmentally friendly
- custom heights available
- life time warranty
- contribute to LEED® Certification points

Decor Colors

Concrete colors that are more than just skin deep.

The Decor Series of colors adds warmth and vitality to an already attractive product, enhancing the ability of discerning designers to both beautify and harmonize any lighting project. Available in a wide selection of colors from earth tones to delicate pastels, Decor colors are unique in the pole world in that the color permeates through the entire pole rather than being merely a surface treatment. Both etched or polished surface finishes combine the attributes of a solid colored matrix with the undefinable beauty of natural stone for stunning results.

Polished Decorative Spun Concrete



Midnight Lace - S10



Eclipse Black - S11



Salt & Pepper - S30



Ash White - S35*




Pearl Gray - S40




Dusty Rose - S41



Aztec Jade - S51



Oriental Jade - S52



Detroit Green - S53



Autumn Red - S60



Desert Sand - S70



Vintage Brown - S80



Rosewood - S81



Saluki Bronze- S90

Etched Decorative Spun Concrete



Midnight Lace - E10



Eclipse Black - E11



Salt & Pepper - E30



Ash White - E35*



Pearl Gray - E40



Dusty Rose - E41



Aztec Jade - E51




Oriental Jade - E52



Detroit Green - E53



Autumn Red - E60



Desert Sand - E70



Vintage Brown - E80



Rosewood - E81



Saluki Bronze- E90

* Only available without acrylic, please specify **NA** in catalog code


** All colours also available without acrylic, please specify **NA** in catalog code



THE ALEXANDER

The Alexander Pole was designed with the needs of the residential developer in mind. The dual cavities within the base of the pole for concealing communications equipment provide a clean streetscape by eliminating the telephone and cable communications pedestals that are often seen throughout a development.

Clean, proportionate lines, and the great benefits of centrifugally spun concrete pole technology make the Alexander a perfect addition to many residential developments.

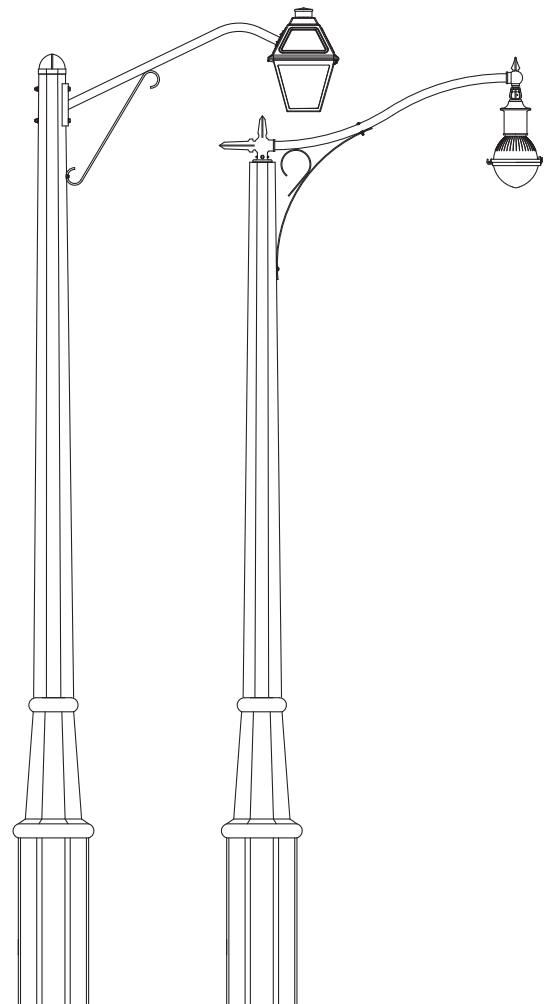

THE TELECOM SOLUTION

Cable and Phone Lines are neatly tucked away inside the Pole Base.

Specification Details




Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	Pole Weight Direct Buried
Alexander 18'	KAH18	18' 0"	7 3/4"	4400 lbs
Alexander 20'	KAH20	20' 0"	7 1/2"	4500 lbs
Alexander 22'	KAH22	22' 0"	7 1/8"	4575 lbs
Alexander 25'	KAH25	25' 0"	6 5/8"	4700 lbs
Alexander 30'	KAH30	30' 0"	5 3/4"	4850 lbs
Alexander 32'	KAH32	32' 0"	5 3/8"	4950 lbs

How to Catalog for Alexander Concrete Pole

Pole Style KAH	Finish E – Etched Finish	Footing Details DB – Direct Buried	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BA – Banner Arms FH – Flag Holders
KAH 32'	E 40	DB 140 30/30	GFI NA
Height 18' - 32'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Coating NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details

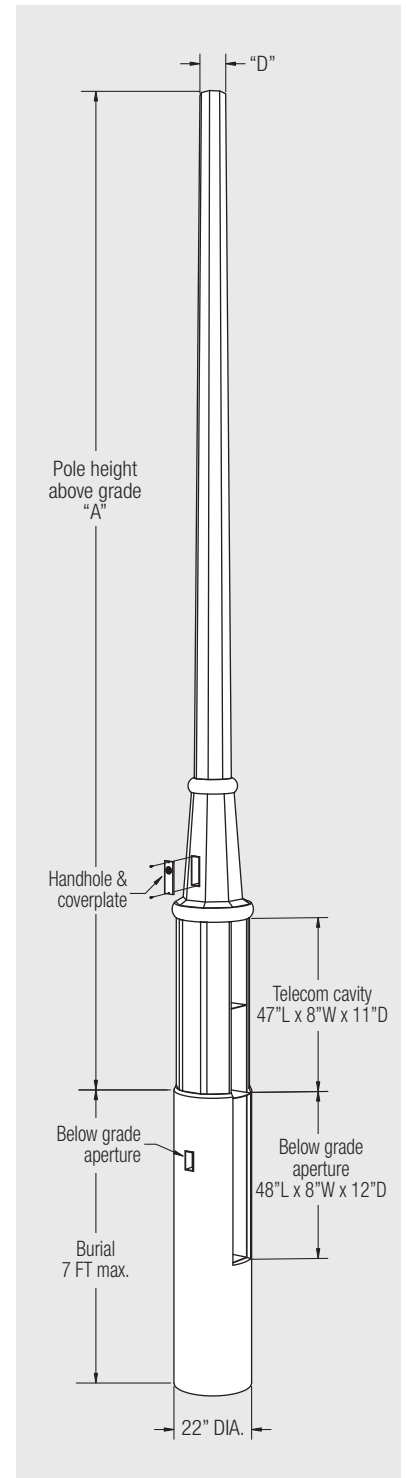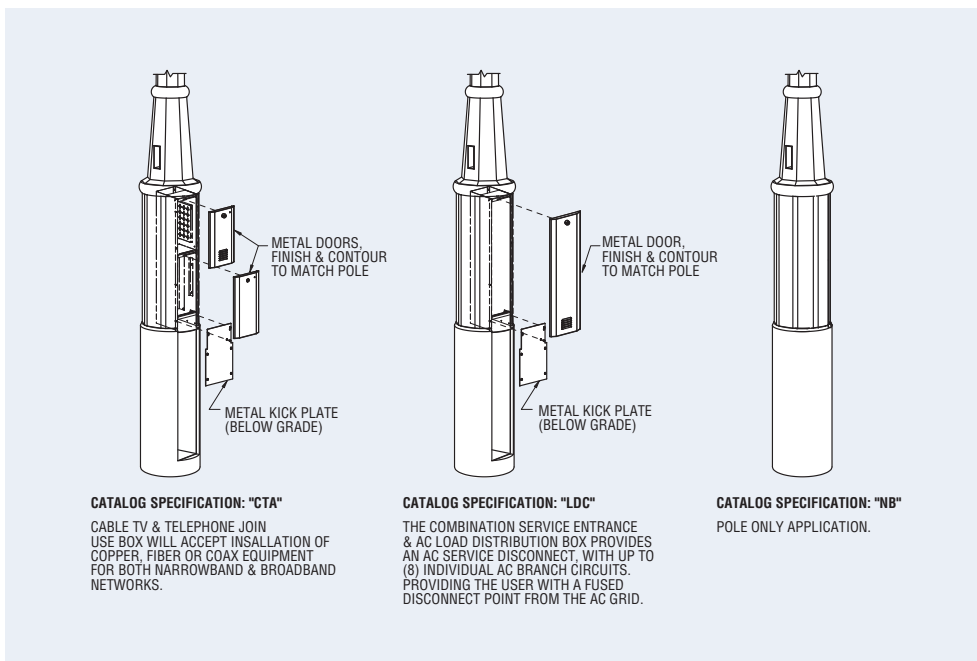


Typical Pole Cross Section

THE BEAUMONT

Available with three distinct base style options, the clean lines of the Beaumont family of poles make it an ideal choice for a customer looking for the classic style of a round pole, but with the added flare of a decorative base. The Beaumont offers a slender tapered round shaft with a complementing stepped round base for additional accent. The KB8 style features a second step for a custom appearance.

At shorter lengths, the Beaumont is ideal for residential applications and park settings, while the KB3 with up to a 40' mounting height is an ideal fit for roadway and arterial lighting applications.

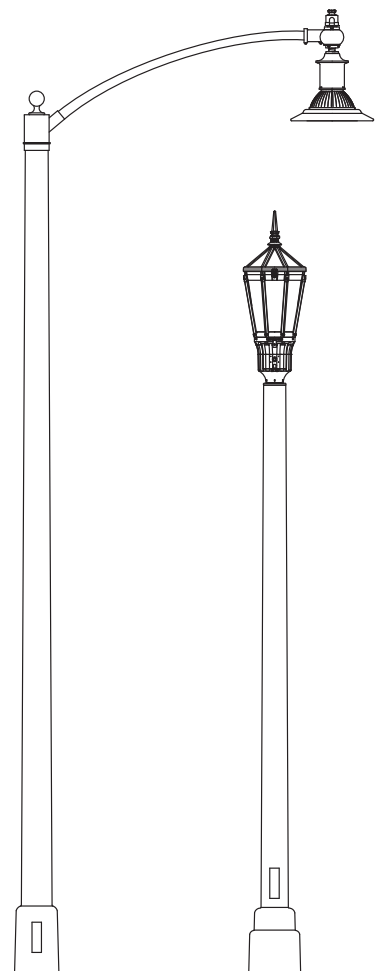

Specification Details - Beaumont B2

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Beaumont B2	KB2-15	15' 0"	6 3/8"	4' 6" x 7 7/8"	970 lbs	750 lbs
Beaumont B2	KB2-18	18' 0"	6"	5' 0" x 7 7/8"	1070 lbs	830 lbs
Beaumont B2	KB2-20	20' 0"	5 3/4"	5' 0" x 7 7/8"	1140 lbs	900 lbs
Beaumont B2	KB2-25	25' 0"	5 1/8"	5' 0" x 7 7/8"	1290 lbs	1050 lbs
Beaumont B2	KB2-26.5	26' 6"	5"	5' 0" x 7 7/8"	1340 lbs	1100 lbs

How to Catalog for Beaumont KB2 Concrete Pole

Pole Style	Finish	Footing Details	Coating
KB2	E – Etched Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KB2	E	DB	NA
15'	40	140 30/30	GFI
Height 15' - 26'6"	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details



Direct Buried

(Simple and Cost Effective)



1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

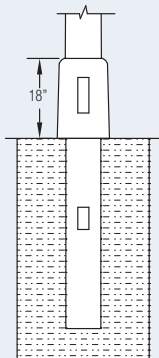


Baseplate Option 1: FBP



Baseplate Option 2: SBP



*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

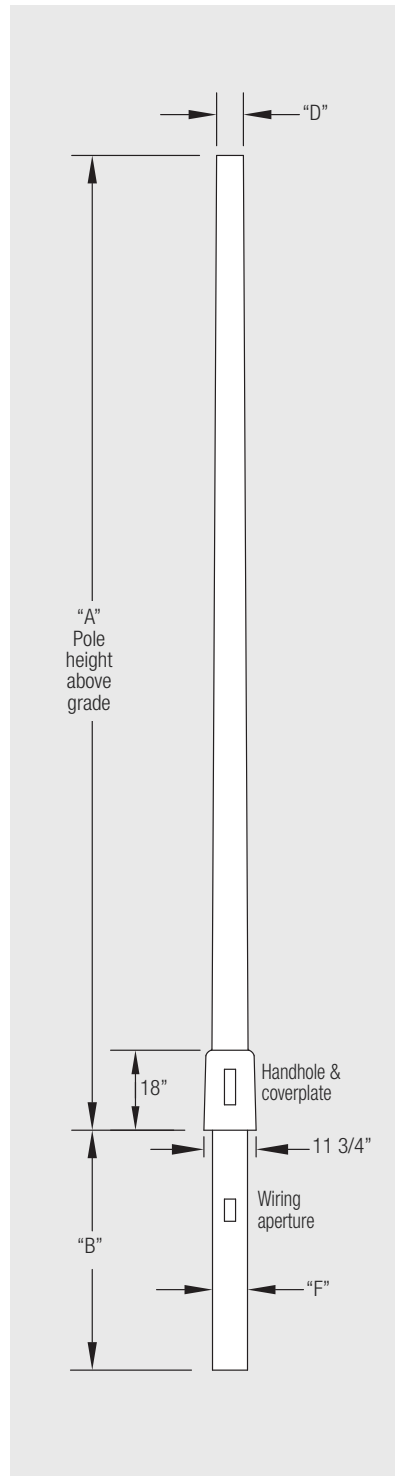

Typical Pole Cross Section

Specification Details - Beaumont B3 and B7




Description	Catalog Number	"A" Pole Height Above Grade	"B" Base Dimension	"D" Tip Dimension	"H" Base Height	"P" Base Plate Size	"BCD" Bolt Circle Dia.	Pole Weight Base Plate
Beaumont B7	KB7-10	10' 0"	11 7/8"	6 1/4"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	550 lbs
Beaumont B7	KB7-12	12' 0"	11 7/8"	6"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	610 lbs
Beaumont B7	KB7-15	15' 0"	11 7/8"	5 5/8"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	700 lbs
Beaumont B7	KB7-20	20' 0"	11 7/8"	5"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	820 lbs
Beaumont B7	KB7-24	24' 0"	11 7/8"	4 1/2"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	930 lbs
Beaumont B3	KB3-25	25' 0"	17 7/8"	6 7/8"	27"	1 1/4" x 20"	21" Dia	1520 lbs
Beaumont B3	KB3-30	30' 0"	17 7/8"	6 1/4"	27"	1 1/4" x 20"	21" Dia	1720 lbs
Beaumont B3	KB3-35	35' 0"	17 7/8"	5 3/4"	27"	1 1/4" x 20"	21" Dia	1950 lbs
Beaumont B3	KB3-40	40' 0"	17 7/8"	5 1/8"	27"	1 1/4" x 20"	21" Dia	2100 lbs

How to Catalog for Beaumont KB3 and KB7 Concrete Pole

Pole Style	Finish	Footing Details	Coating
KB7 KB3	E – Etched Finish	FBP – Flush Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KB3 40'	E 40	FBP 140 30/30	GFI NA
Height KB7 – 10' - 24' KB3 – 25' - 40'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details

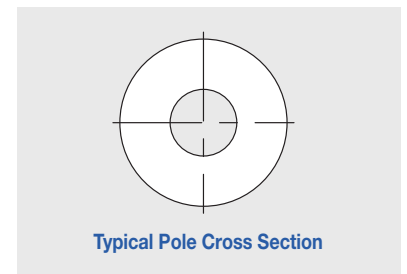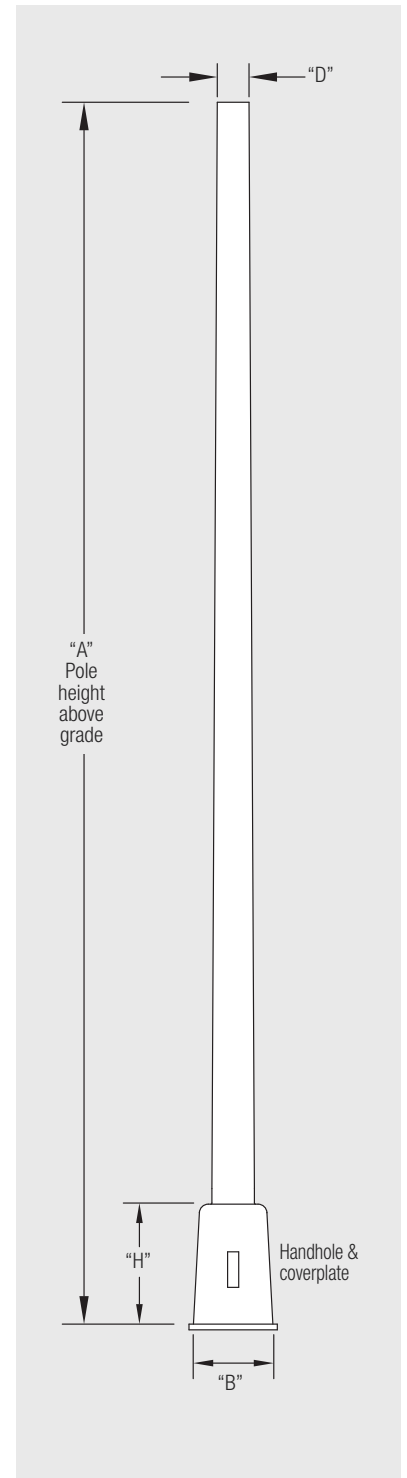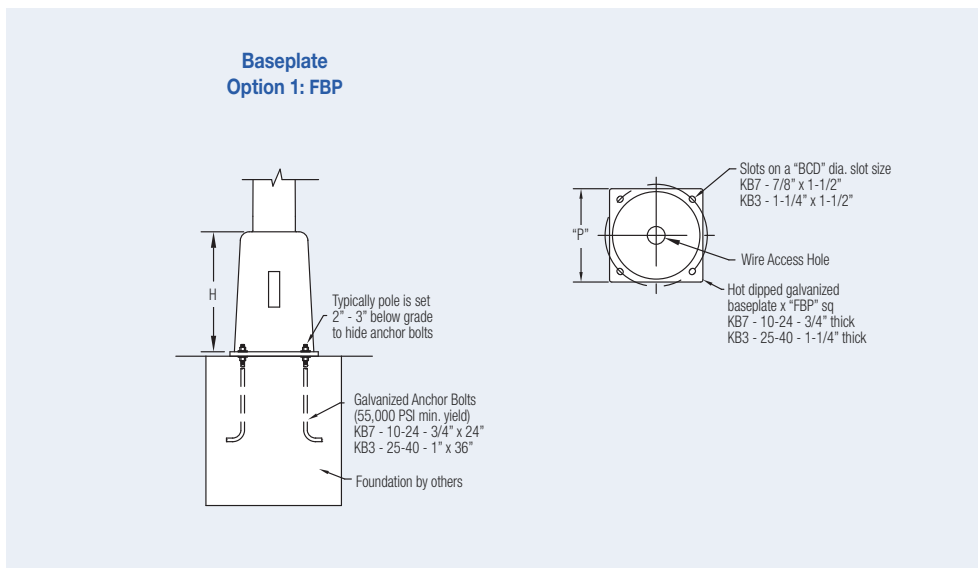

Specification Details - Beaumont B8




Description	Catalog Number	"A" Pole Height Above Grade	Base Diameter	"D" Tip Dimension	Base Height	Pole Weight Base Plate
Beaumont B8	KB8-10	10' 0"	13 3/4"	6 1/4"	17 5/8"	580 lbs
Beaumont B8	KB8-12	12' 0"	13 3/4"	6"	17 5/8"	640 lbs
Beaumont B8	KB8-15	15' 0"	13 3/4"	5 5/8"	17 5/8"	730 lbs
Beaumont B8	KB8-20	20' 0"	13 3/4"	5"	17 5/8"	830 lbs
Beaumont B8	KB8-24	24' 0"	13 3/4"	4 1/2"	17 5/8"	960 lbs

How to Catalog for Beaumont KB8 Concrete Pole

Pole Style KB8	Finish E – Etched Finish	Footing Details FBP – Flush Baseplate	Coating NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KB8	E	FBP	NA
10'	40	140 30/30	GFI
Height 10' - 24'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details

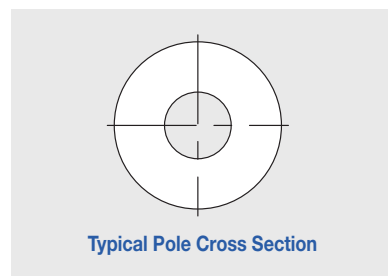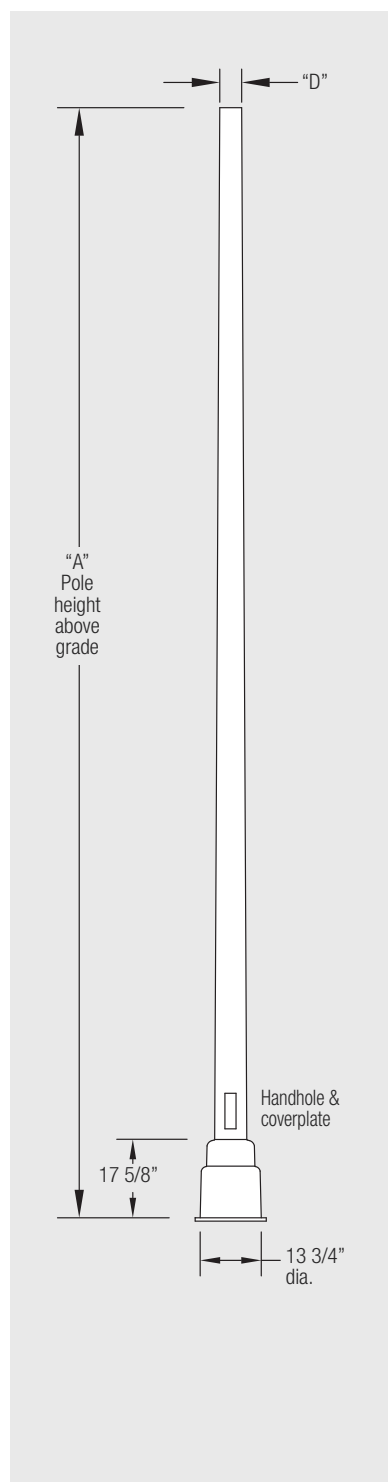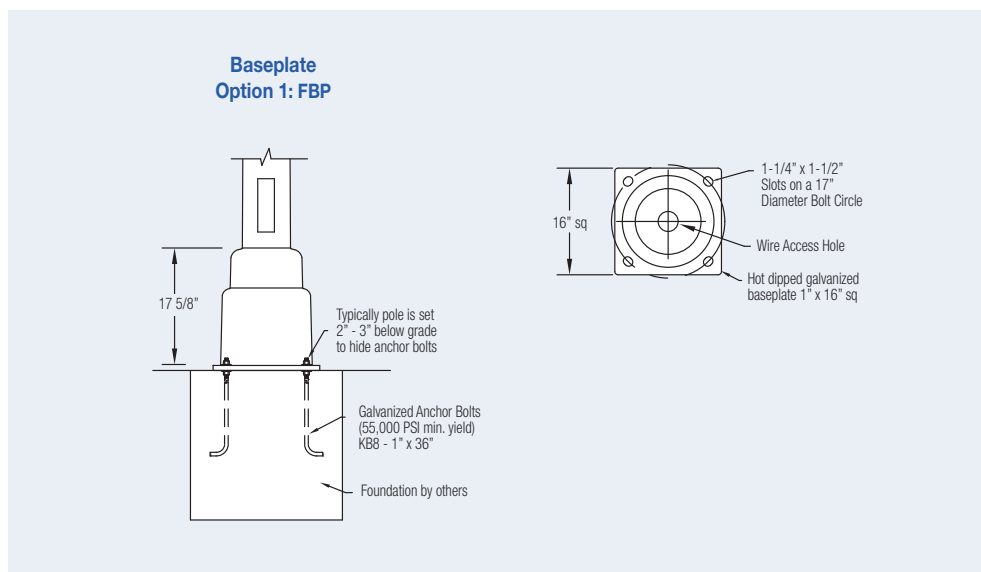

THE BELMONT

This gracefully proportioned pole was originally produced as a slightly upscaled version of the Sheridan. The two poles are, of course, very similar, with the Belmont showing more architectural detail around the base, which identified it as the original top of the line. It was a popular choice of universities and campuses, especially in the midwest. Many still have their original installations in service. It is available in heights from 5' to 30' as well as a lighted and nonlighted bollard.

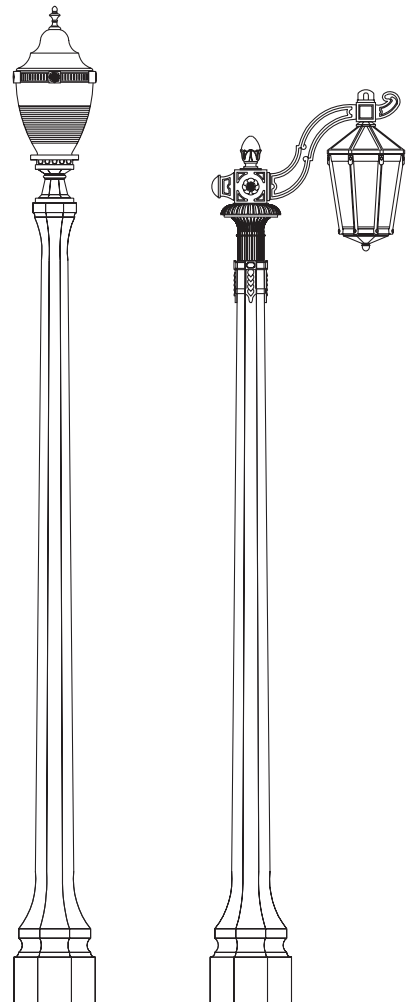

Specification Details*


Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Footman 11' Flared Top	KBF11	11' 0"	9"	6"	18"	4' 6" x 9 1/2"	1050 lbs	850 lbs
Coachman 12' Non Flared Top	KBC12	12' 0"	5 3/4"	10"	17"	4' 6" x 9 1/2"	1300 lbs	1100 lbs
Coachman 14' Flared Top	KBC14	13' 11"	9"	10"	17"	4' 6" x 9 1/2"	1370 lbs	1170 lbs
Highwayman 18' 20' 22' 25' 30'	KBH18 KBH20 KBH22 KBH25 KBH30	18' 0" 20' 0" 22' 0" 25' 0" 30' 0"	6 1/4" 6" 5 3/4" 5 3/8" 4 3/4"	10" 10" 10" 10" 10"	18" 18" 18" 18" 18"	5' 0" x 9 1/2" 5' 0" x 9 1/2" 5' 0" x 9 1/2" 5' 0" x 9 1/2" 5' 0" x 9 1/2"	1500 lbs 1600 lbs 1700 lbs 1800 lbs 1900 lbs	1300 lbs 1400 lbs 1500 lbs 1600 lbs 1700 lbs

* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Belmont Concrete Pole

Pole Style	Finish	Footing Details	Coating
KBF KBC KBH	E – Etched Finish S – Polished Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KBH	E	DB	NA
30'	40	140 30/30	GFI
Height 5' - 30'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

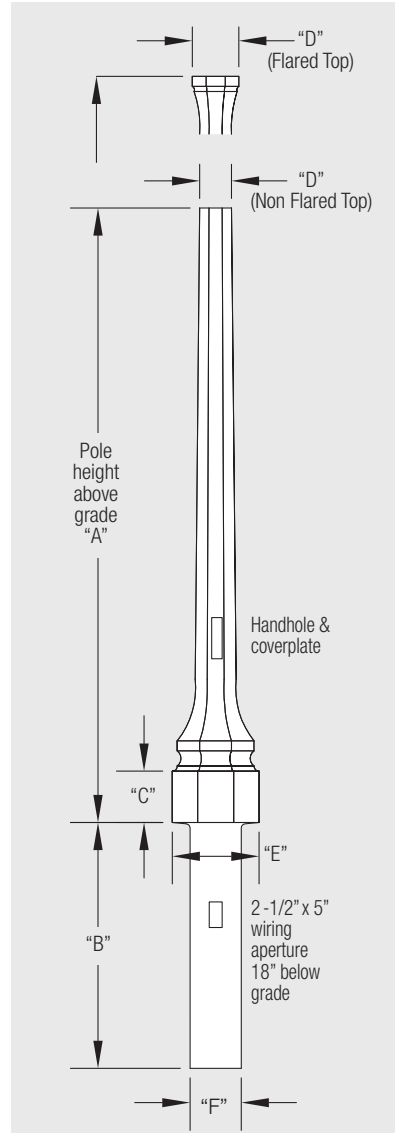


Footing Details

Direct Buried

(Simple and Cost Effective)



1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

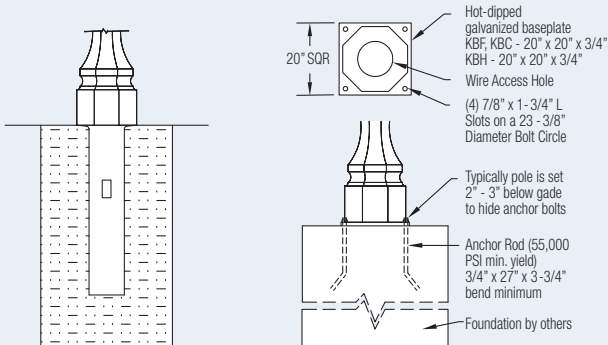


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

Baseplate Option 1: FBP

Baseplate Option 2: SBP

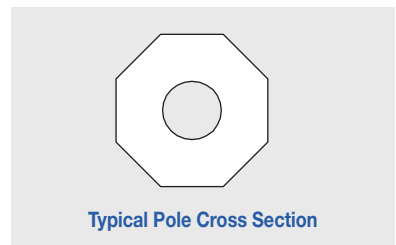

Typical Pole Cross Section



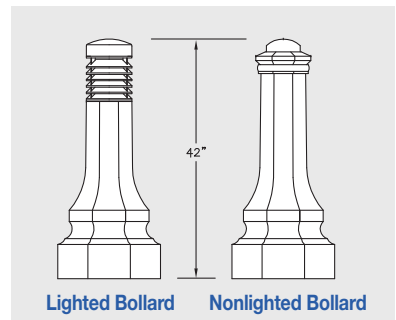


Lighted Bollard

Nonlighted Bollard

THE CALIFORNIA

One of our most ornate concrete poles, the California pole is truly a work of art. This embellished ornamental pole with hints of Greek styling offers a 15 fluted shaft with very high definition elements including leaf and floral details. Available in three mounting configurations, it will be a great fit for streetscapes or residential applications. The California pole is available in an above grade height of 15' 1.5".



Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
California KCA	KCA15	15' 1 1/2"	11"	4' 6" x 10"	1100 lbs	900 lbs

Other heights may be available. Contact Factory.

How to Catalog for California Concrete Pole


Pole Style		Finish		Footing Details		Coating	
KCA		E – Etched Finish		DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate		NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***	
KCA	15'	E	40	DB	140 30/30	GFI	NA
Height 15' 1.5"		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms (clamp on only) FH – Flag Holders (clamp on only)	

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.


Footing Details

Direct Buried (Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

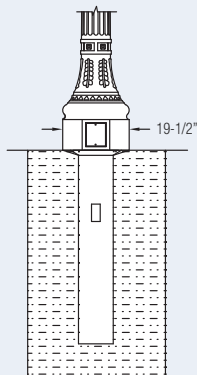



Baseplate Option 1: FBP

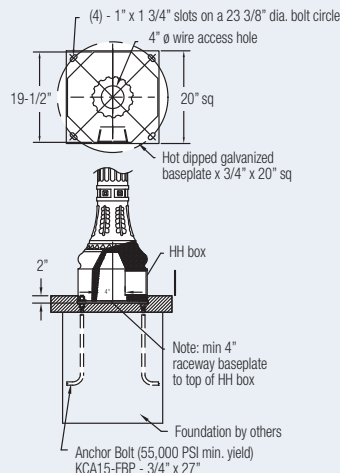

Baseplate Option 2: SBP

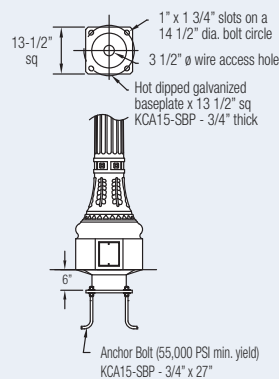


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

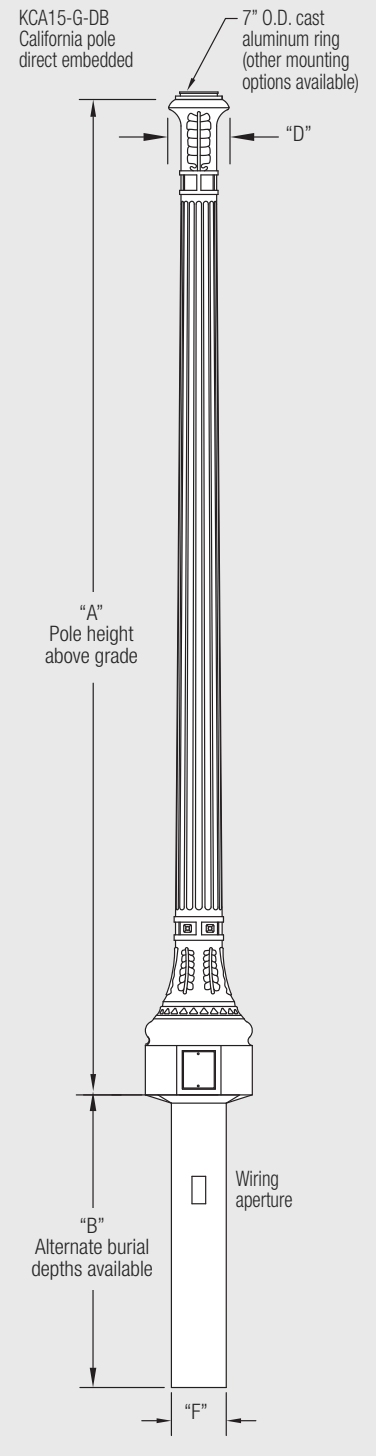

Typical Pole Cross Section

THE CANTERBURY

While neither strictly traditional nor contemporary in appearance, the Canterbury family of spun concrete poles incorporates echoes of both and can be found on a wide spectrum of projects. The clean, classical lines of this design ensure that the Canterbury will be equally at home in residential subdivisions, city parks or commercial settings. Available in heights from 5' to 30', it is especially effective in downtown or waterfront relighting situations, adding ambience, while at the same time addressing both arterial and pedestrian lighting needs. Available with an etched finish in all of StressCrete's beautiful decor colors, the Canterbury will never fall short of expectations.

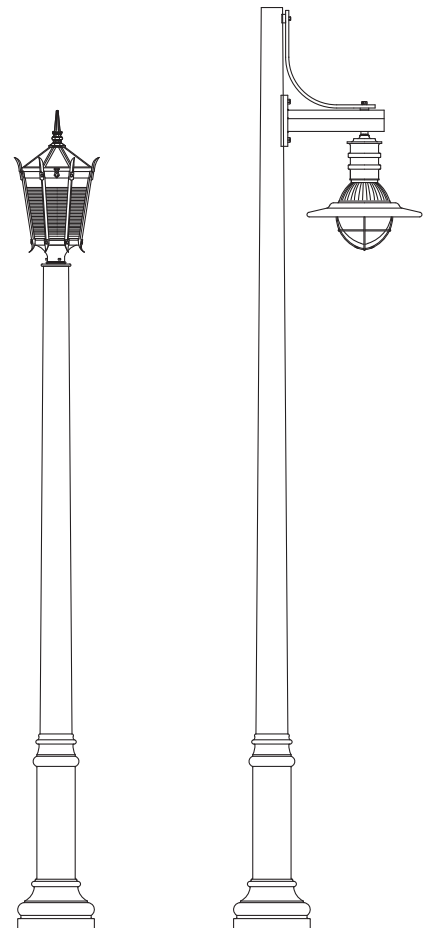

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Canterbury 10'	KYC10	10' 0"	6 1/8"	46"	18"	5' 0" x 10"	1000 lbs	795 lbs
Canterbury 13'	KYC13	13' 0"	5 5/8"	46"	18"	5' 0" x 10"	1040 lbs	835 lbs
Canterbury 15'	KYC15	15' 0"	5 1/4"	46"	18"	5' 0" x 10"	1100 lbs	895 lbs
Canterbury 18'	KYC18	18' 0"	4 3/4"	46"	18"	5' 0" x 10"	1170 lbs	965 lbs
Canterbury 20'	KYH20	20' 0"	6 3/4"	56"	22"	5' 0" x 12"	1925 lbs	1655 lbs
Canterbury 25'	KYH25	25' 0"	5 7/8"	56"	22"	5' 0" x 12"	2175 lbs	1905 lbs
Canterbury 30'	KYH30	30' 0"	5"	56"	22"	5' 0" x 12"	2425 lbs	2155 lbs

* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Canterbury Concrete Pole

Pole Style	Detail	Finish	Footing Details	Coating
KYC KYH	F – Fluted NF – Non Fluted	E – Etched Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KYH	F	30'	E	40
Height 5' - 30'		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.


***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details



Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

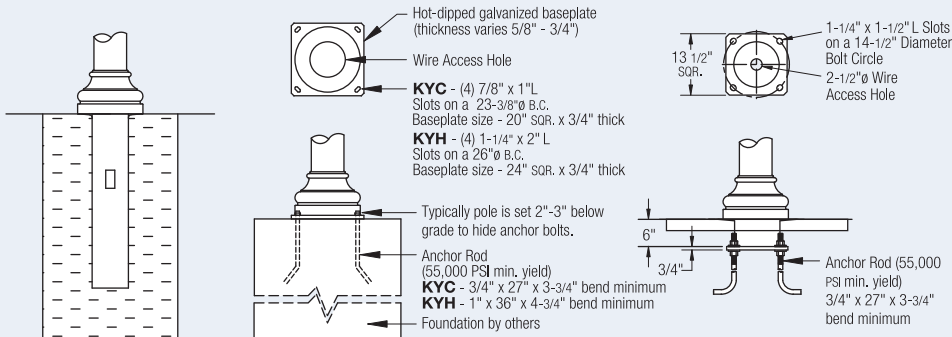

*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

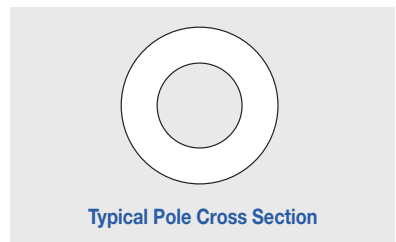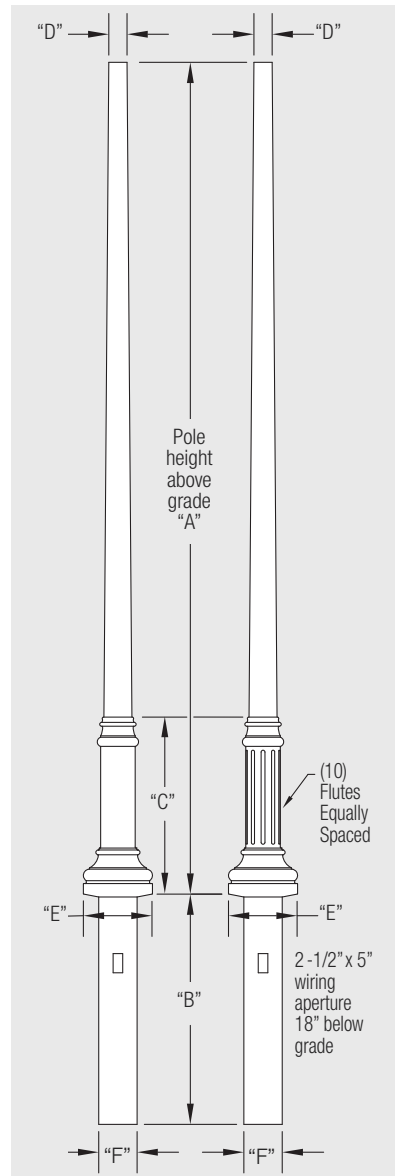

Typical Pole Cross Section

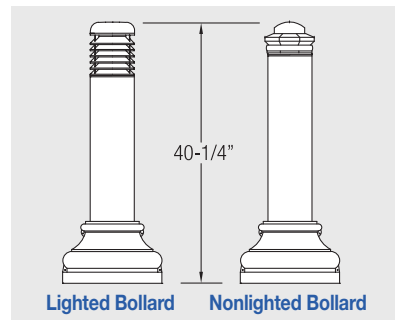


Lighted Bollard

Nonlighted Bollard

THE CENTENNIAL

The classic lines of both the Centennial C1 and Centennial C2 make this family suitable for many applications and the perfect fit for many of King Luminaire's decorative post top and pendant luminaires. The C1 Centennial offers a stepped Octagonal 13" base with a tapered Octagonal pole shaft. It is available in lengths up to 30'. The C2 Centennial is slightly larger and available in lengths up to 35'.

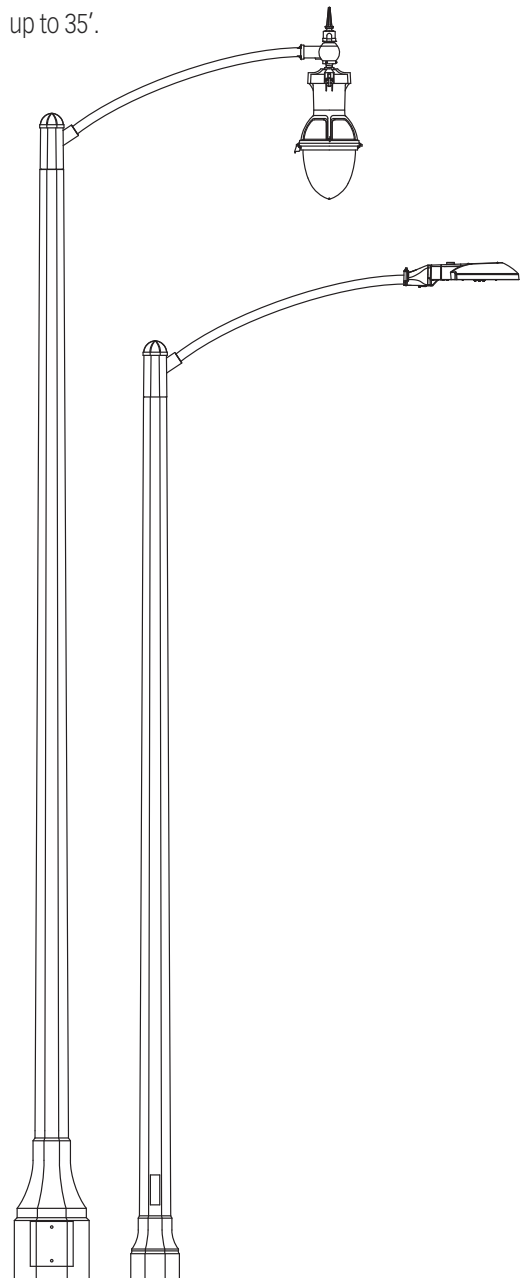

Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Centennial C1	KCT1-12	12' 0"	7"	4' 6" x 10"	1050 lbs	850 lbs
Centennial C1	KCT1-15	15' 0"	6 3/4"	4' 6" x 10"	1150 lbs	950 lbs
Centennial C1	KCT1-18	18' 0"	6 3/8"	5' 0" x 10"	1280 lbs	1050 lbs
Centennial C1	KCT1-20	20' 0"	6 1/8"	5' 0" x 10"	1380 lbs	1150 lbs
Centennial C1	KCT1-22	22' 0"	5 7/8"	5' 0" x 10"	1480 lbs	1250 lbs
Centennial C1	KCT1-25	25' 0"	5 1/2"	5' 0" x 10"	1600 lbs	1370 lbs
Centennial C1	KCT1-30	30' 0"	5"	5' 0" x 10"	1750 lbs	1520 lbs
Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Centennial C2	KCT2-12	12' 0"	7 7/8"	N/A	N/A	1200 lbs
Centennial C2	KCT2-15	15' 0"	7 1/2"	N/A	N/A	1300 lbs
Centennial C2	KCT2-18	18' 0"	7 1/8"	N/A	N/A	1400 lbs
Centennial C2	KCT2-20	20' 0"	7"	N/A	N/A	1500 lbs
Centennial C2	KCT2-22	22' 0"	6 3/4"	N/A	N/A	1600 lbs
Centennial C2	KCT2-25	25' 0"	6 3/8"	N/A	N/A	1700 lbs
Centennial C2	KCT2-30	30' 0"	5 3/4"	N/A	N/A	1800 lbs
Centennial C2	KCT2-35	35' 0"	5 1/8"	N/A	N/A	1900 lbs

How to Catalog for Centennial C1 & C2 Concrete Pole


Pole Style KCT1 ¹ KCT2 ² KCT1	Finish E – Etched Finish S – Polished Finish E	Footing Details DB – Direct Buried ³ FBP – Flush Baseplate SBP – Stub Baseplate ³ DB	Coating NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating*** NA
Height 12' - 35' 30'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long 140 30/30	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders GFI

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
 ***Anti Graffiti Coating is extra, consult factory for more details.
¹ 12' - 30' ² 12' - 35' ³ only available for C1

Footing Details - Centennial C1

Direct Buried (Simple and Cost Effective)



1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

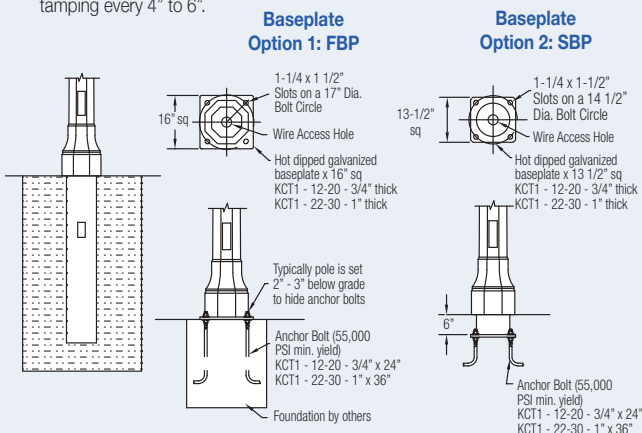


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

Centennial C2

Baseplate Option 1: FBP

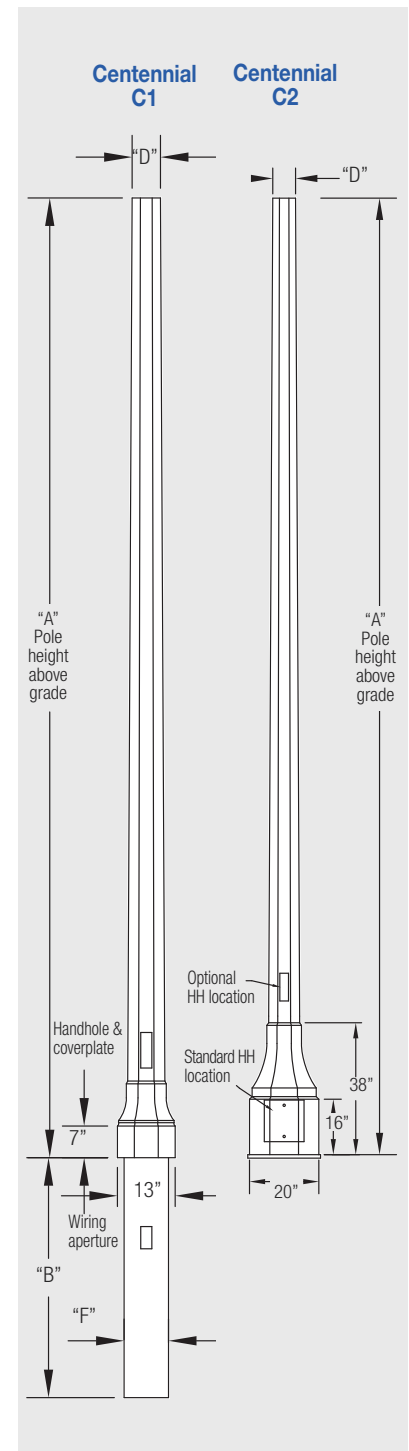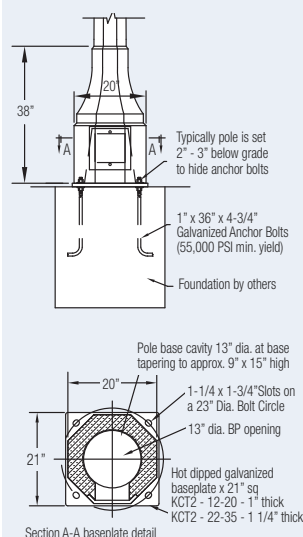


Typical Pole Cross Section



THE CLASSIC

The essence of yesteryear is captured in the Classic – the modern pole with a touch of nostalgia. The availability of height above grade from 5'-31' enables the designer to adopt an integrated theme through an entire development. The Coachman is common in intimate settings while the Highwayman and Roadway have a splendid effect on arterial roads or commercial areas. The Classic is also available as a lighted or nonlighted bollard.

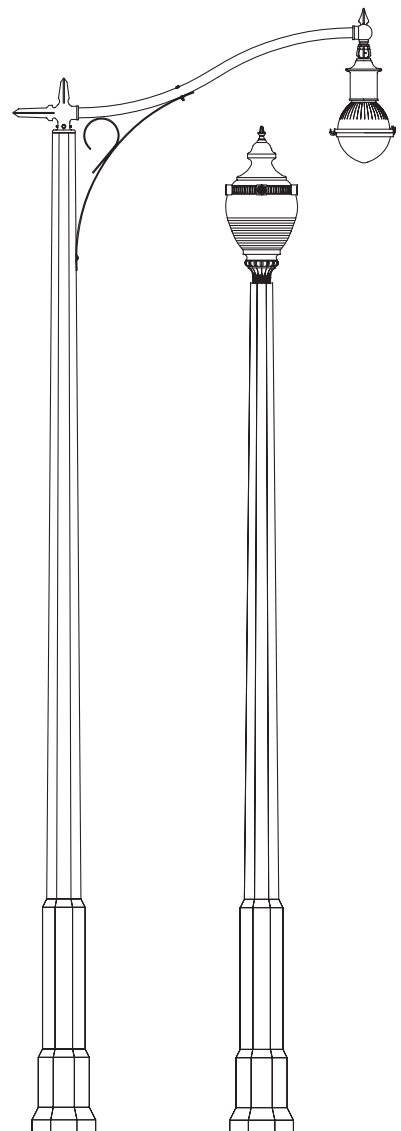

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Coachman	12' KCC12	12' 0"	4 1/2"	4' 6"	14"	4' 7" x 8 1/4"	975 lbs	800 lbs
	15' KCC15	15' 0"	4"	4' 6"	14"	4' 7" x 8 1/4"	1050 lbs	865 lbs
Highwayman	18' KCH18	18' 0"	5 1/8"	4' 7"	15 5/16"	5' 0" x 9 1/4"	1100 lbs	920 lbs
	20' KCH20	20' 0"	4 3/4"	4' 7"	15 5/16"	5' 0" x 9 1/4"	1200 lbs	1020 lbs
	22' KCH22	22' 0"	5 3/8"	4' 7"	16"	5' 0" x 10"	1425 lbs	1025 lbs
	25' KCH25	25' 0"	4 3/4"	4' 7"	16"	5' 0" x 10"	1600 lbs	1400 lbs
	27' KCH27.5	27' 6"	4 1/2"	4' 7"	16"	5' 0" x 10"	1700 lbs	1500 lbs
Roadway	31' KCR31.5	31' 4"	5 1/8"	5' 5"	19"	7' 0" x 12"	2550 lbs	2200 lbs


* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Classic Concrete Pole

Pole Style	Finish	Footing Details	Coating
KCC KCH KCR	E – Etched Finish S – Polished Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KCR	E	DB	NA
31.5'	40	140 30/30	GFI
Height 5' – 31'4"	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.

***Anti Graffiti Coating is extra, consult factory for more details.

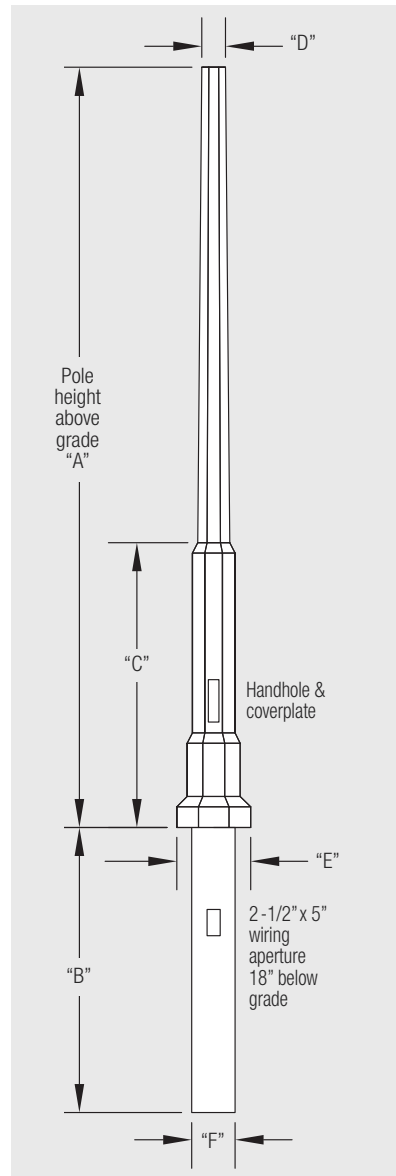


Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

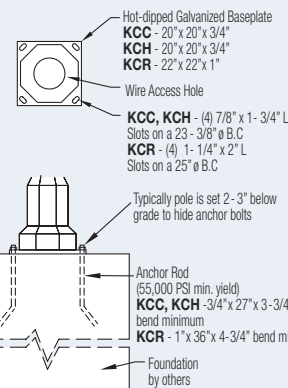


Baseplate Option 2: SBP

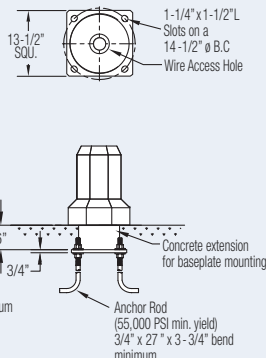

*Generally the excavated material can be used for backfill, in some situations better backfill may be required.




Typical Pole Cross Section



Lighted Bollard Nonlighted Bollard

THE IONIC

The Ionic decorative concrete pole has a unique look that will make any architectural lighting project stand out. Its 15 fluted shaft and ornate historical styling dates back to the early 1900's. From top to bottom, not a detail has been missed, and it is the perfect fit for one of King Luminaire's decorative post top fixtures. It is available in an above grade height of 10'.

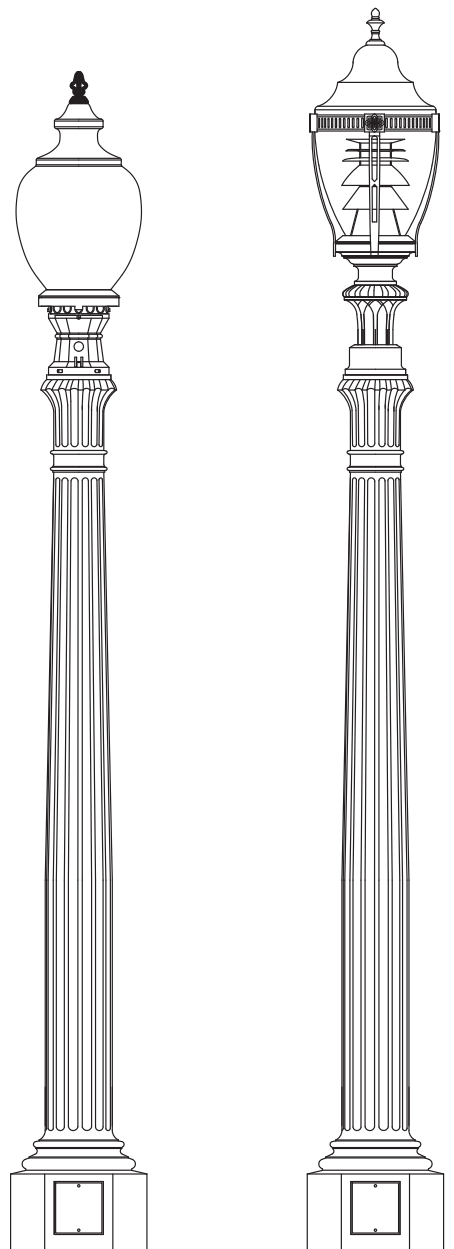

Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Ionic KIC	KIC10	9' 9"	10"	4' 6" x 9 1/2"	860 lbs	655 lbs

Other heights may be available. Contact factory.

How to Catalog for Ionic Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KIC		E – Etched Finish		DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate		NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***	
KIC	10'	E	40	DB	140 30/30	GFI	NA
Height 9' 9"		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms (clamp on only) FH – Flag Holders (clamp on only)	


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

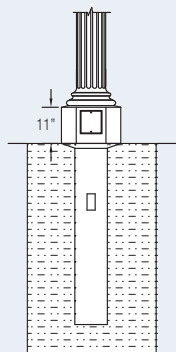



Baseplate Option 1: FBP

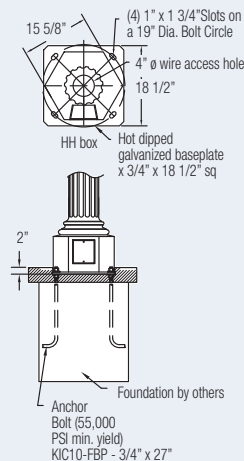

Baseplate Option 2: SBP

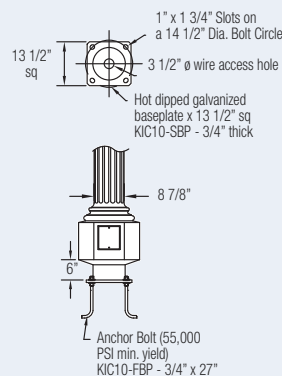


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

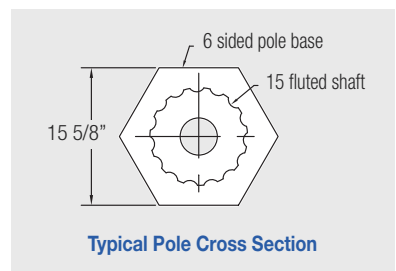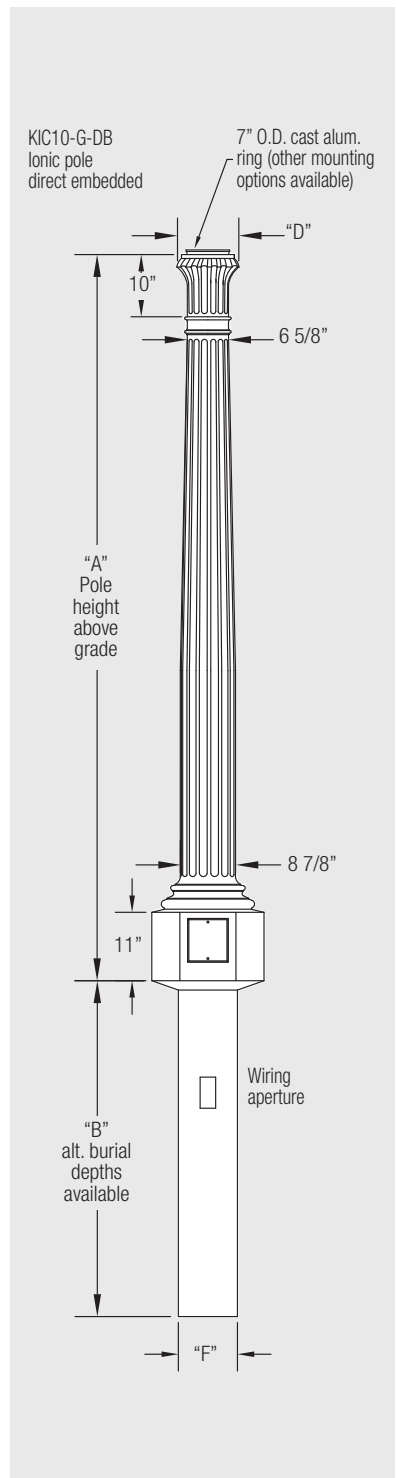

THE KENSINGTON

Offering a timeless blend of symmetry and simplicity, the Kensington will bring style and distinction to any project. Although a recent design, this gracefully proportioned pole bears all of the earmarks of a classic. It is available in heights from 5' to 33' 9".

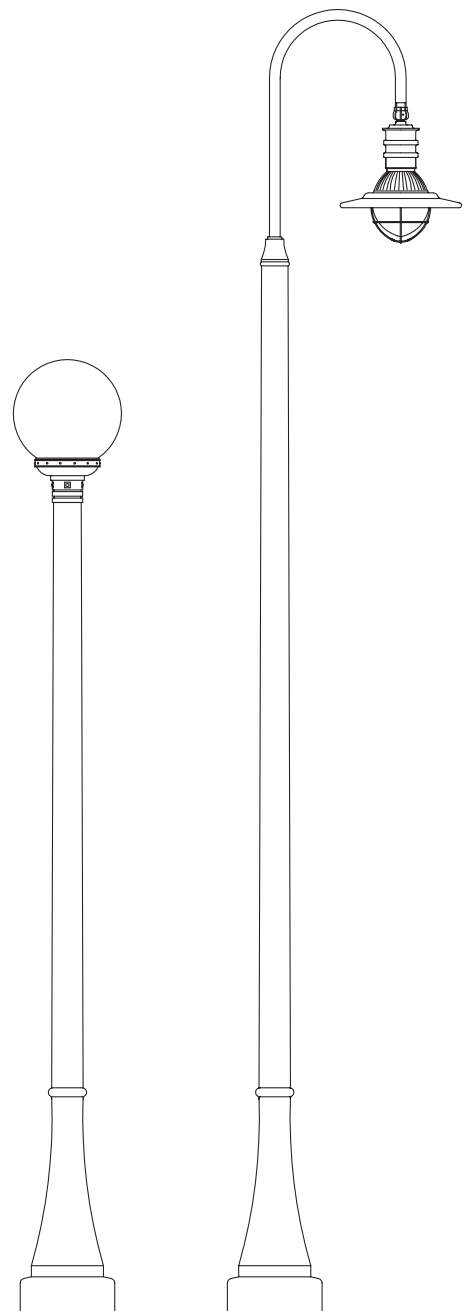

Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Kensington 15'	KK15	15' 0"	6 1/4"	5' 0" x 10"	1515 lbs	1360 lbs
Kensington 18'	KK18	18' 0"	6"	5' 0" x 10"	1600 lbs	1445 lbs
Kensington 20'	KK20	20' 0"	5 7/8"	5' 0" x 10"	1655 lbs	1500 lbs
Kensington 25'	KK25	25' 0"	5 1/2"	5' 0" x 10"	1780 lbs	1625 lbs
Kensington 30'	KK30	30' 0"	5"	5' 7" x 10"	1920 lbs	1735 lbs
Kensington 34'	KK339	33' 9"	4 3/4"	5' 7" x 10"	2000 lbs	1815 lbs

How to Catalog for Kensington Concrete Pole

Pole Style	Finish	Footing Details	Coating
KK	E – Etched Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KK	E	DB	NA
30'	40	140 30/30	GFI
Height 5' - 33'9"	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP



Baseplate Option 2: SBP

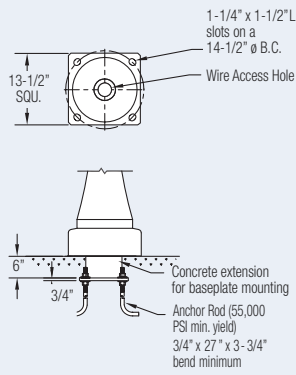


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

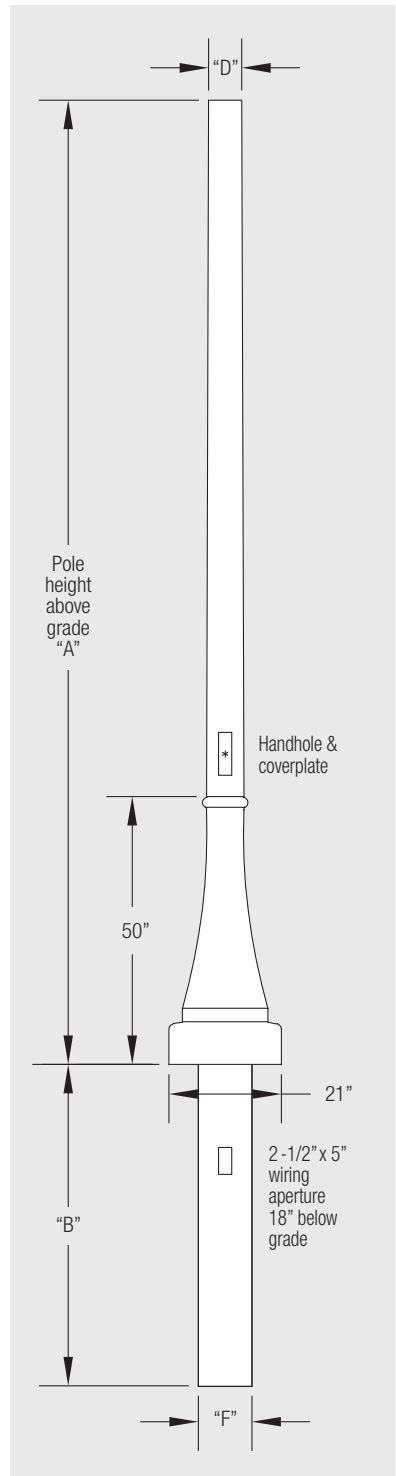

Typical Pole Cross Section

THE LORRAINE

The Lorraine has similar lines as our Memphis family, but with a smoother flowing profile. This Octagonal tapered pole with an 18" stepped base is available in all of our decor colors and finishes in heights up to 30', making it an ideal choice for outdoor street-lighting specifiers.

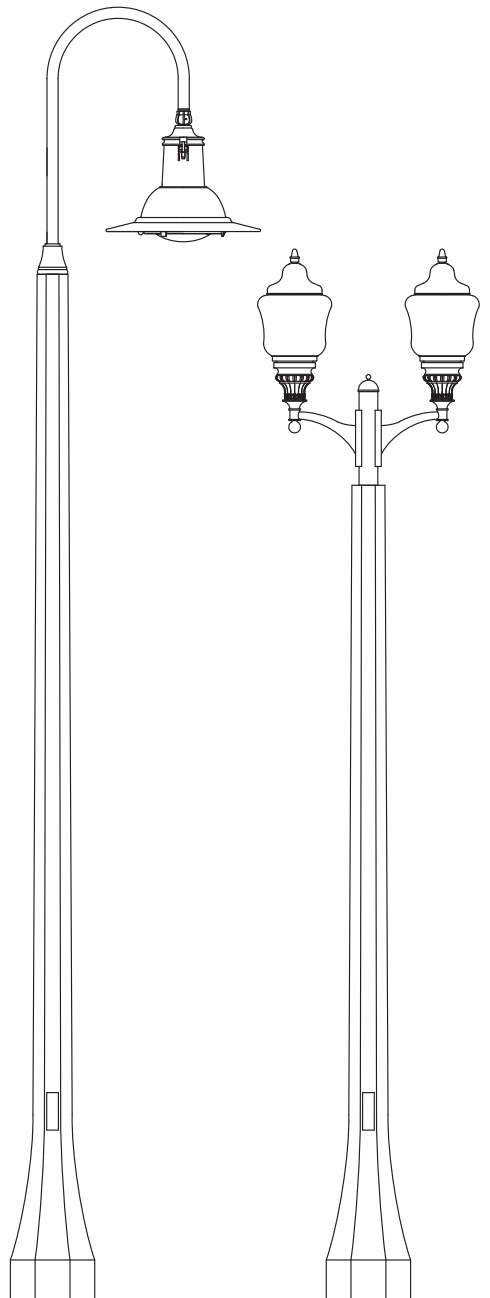

Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Lorraine 12'	KL12	12' 0"	7 3/8"	4' 6" x 9 3/4"	1400 lbs	1150 lbs
Lorraine 15'	KL15	15' 0"	7"	4' 6" x 9 3/4"	1600 lbs	1350 lbs
Lorraine 18'	KL18	18' 0"	6 5/8"	5' 0" x 9 3/4"	1770 lbs	1470 lbs
Lorraine 20'	KL20	20' 0"	6 3/8"	5' 0" x 9 3/4"	1860 lbs	1560 lbs
Lorraine 22'	KL22	22' 0"	6 1/8"	5' 0" x 9 3/4"	1950 lbs	1650 lbs
Lorraine 25'	KL25	25' 0"	5 3/4"	5' 0" x 9 3/4"	2100 lbs	1800 lbs
Lorraine 30'	KL30	30' 0"	5 1/8"	5' 0" x 9 3/4"	2340 lbs	2040 lbs

How to Catalog for Lorraine Concrete Pole


Pole Style KL	Finish E – Etched Finish	Footing Details DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	Coating NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KL 30'	E 40	DB 140 30/30	GFI NA
Height 12' - 30'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.


Footing Details

Direct Buried


- (Simple and Cost Effective)
1. Auger the setting hole.
 2. Set pole in hole and plumb straight.
 3. Backfill* with required backfill tamping every 4" to 6".

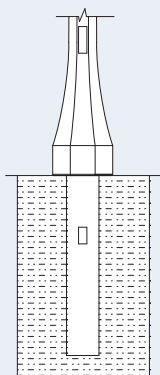



Baseplate Option 1: FBP

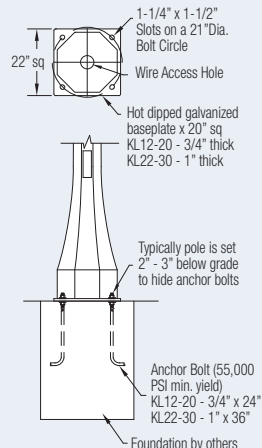

Baseplate Option 2: SBP

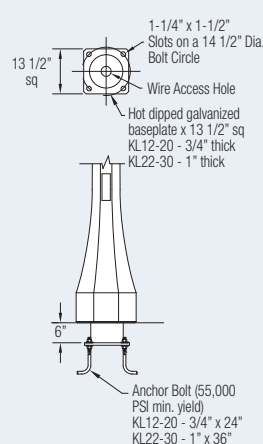


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

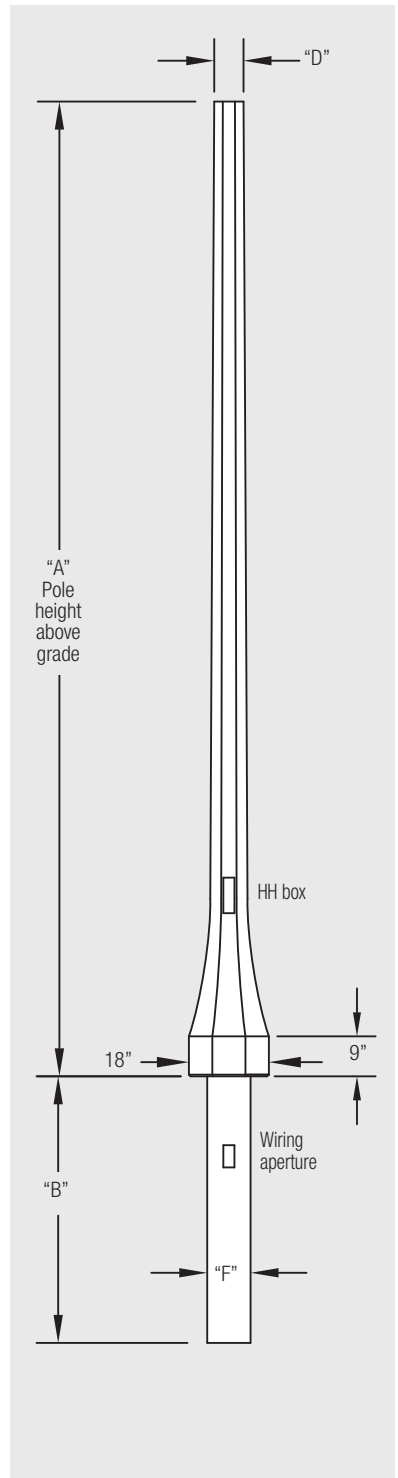

Typical Pole Cross Section

THE MEMPHIS

The simple lines of the Memphis bridges the gap between the ornamental designs of the first three decades of the 20th century and the more utilitarian designs that had their origin in the stark realities of the 40's and 50's. It is available in heights from 5' to 32' in all of our concrete decor colors.

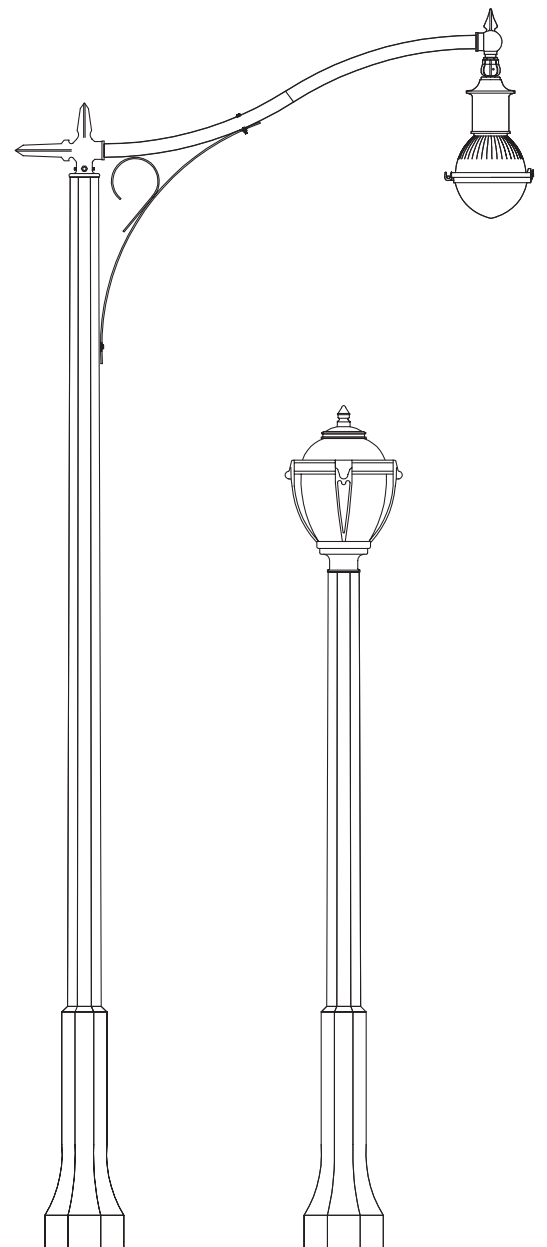

Specification Details

Description		Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Memphis	10'	KM10	10' 0"	5 1/2"	43"	14"	4' 6" x 10"	900 lbs	700 lbs
	13'	KM13	13' 6"	5 1/4"	43"	14"	4' 6" x 10"	975 lbs	775 lbs
	16'	KM16	15' 10"	5"	43"	14"	4' 6" x 10"	1050 lbs	850 lbs
Highwayman	18'	KMH18	18' 0"	7 1/2"	38 1/2"	18"	5' 0" x 12"	1770 lbs	1470 lbs
	20'	KMH20	20' 0"	7 5/16"	38 1/2"	18"	5' 0" x 12"	1860 lbs	1560 lbs
	25'	KMH25	25' 0"	6 7/8"	38 1/2"	18"	5' 0" x 12"	2100 lbs	1800 lbs
	30'	KMH30	30' 0"	6 1/2"	38 1/2"	18"	5' 0" x 12"	2340 lbs	2040 lbs
	32'	KMH325	32' 6"	6 1/4"	38 1/2"	18"	5' 6" x 12"	2420 lbs	2120 lbs

How to Catalog for Memphis Concrete Pole

Pole Style	Finish	Footing Details	Coating
<div> <div>KM</div> <div>KMH</div> </div>	<div> <div>E – Etched Finish</div> <div>S – Polished Finish</div> </div>	<div> <div>DB – Direct Buried</div> <div>FBP – Flush Baseplate</div> <div>SBP – Stub Baseplate</div> </div>	<div> <div>NA – Non Acrylic</div> <div>A – Acrylic</div> <div>AG – Anti Graffiti Coating***</div> </div>
<div> <div>KMH</div> <div>30'</div> </div>	<div> <div>E</div> <div>40</div> </div>	<div> <div>DB</div> <div>140 30/30</div> </div>	<div> <div>GFI</div> <div>NA</div> </div>
<div> <div>Height</div> <div>5' - 32' 6"</div> </div>	<div> <div>Color**</div> <div>10 – Midnight Lace</div> <div>11 – Eclipse Black</div> <div>30 – Salt & Pepper</div> <div>40 – Pearl Gray</div> <div>90 – Saluki bronze</div> </div>	<div> <div>Tenon (Post Top Mount)</div> <div>Specify Tenon Size</div> <div>For example 140 30/30 = 2 7/8" OD & 3" long</div> </div>	<div> <div>Options*</div> <div>DR – Duplex Receptacle</div> <div>GFI – Ground Fault Duplex Receptacle</div> <div>SR – 1 Outlet</div> <div>LRN – Ladder Rest</div> <div>BPC – Base Plate Cover</div> <div>AB – Anchor Bolts</div> <div>BA – Banner Arms</div> <div>FH – Flag Holders</div> </div>


* Consult website for full listings. ** See decolor on page 2 for full selection of colors.
 ***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

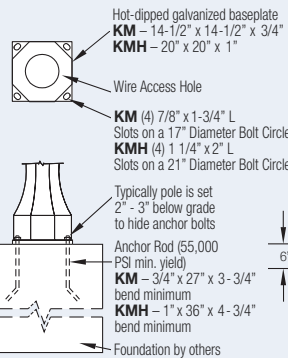


Baseplate Option 2: SBP

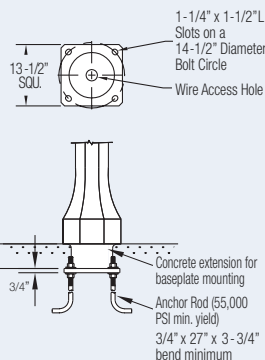

*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

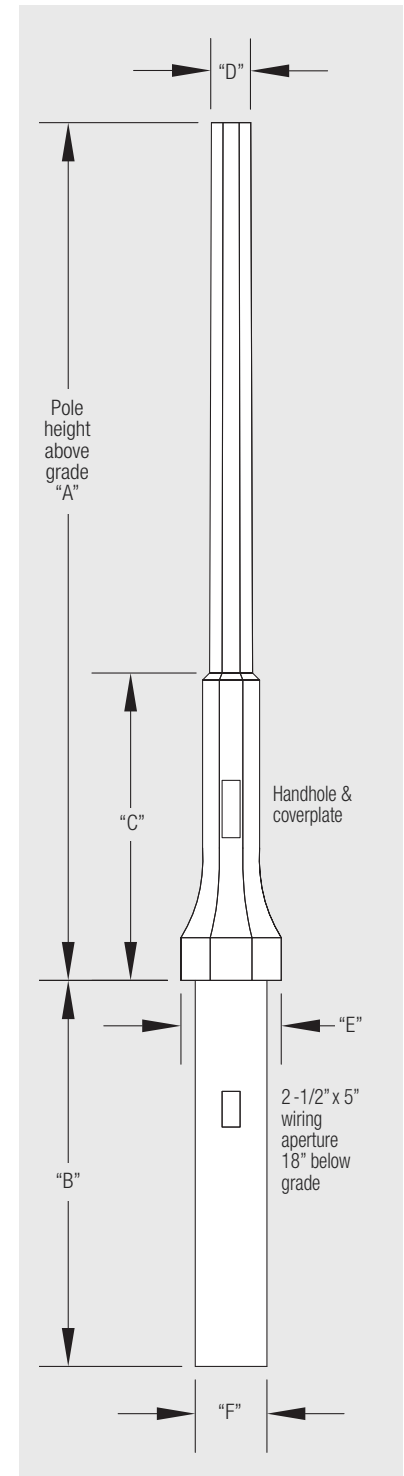


Typical Pole Cross Section



THE PACIFIC

This impressive 15 fluted pole was originally designed in the 1930's to light Tacoma's Pacific Avenue. Massive yet elegant, it has since been used in several prestigious locations. With a 26" flat to flat base this pole is available in heights from 5' to 19' for baseplate applications only.

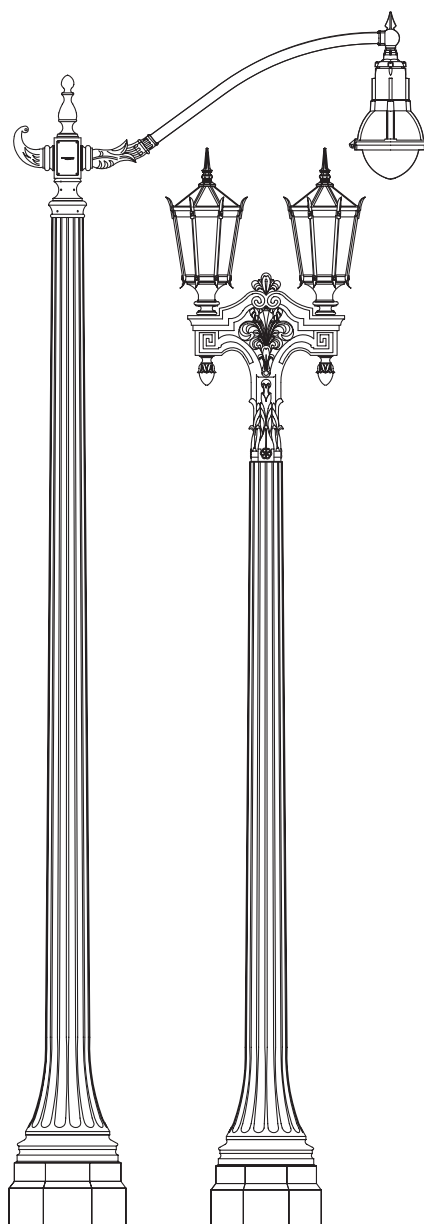

Specification Details




Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	Pole Weight Base Plate
Pacific 15'	KP15	15' 0"	7 5/8"	1450 lbs
Pacific 17'	KP17	17' 0"	7 1/4"	1550 lbs
Pacific 19'	KP19	19' 0"	6 7/8"	1650 lbs

How to Catalog for Pacific Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KP		E – Etched Finish		IBP – Internal Baseplate		NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***	
KP	15'	E	40	IBP	140 30/30	GFI	NA
Height 5' - 19'		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest AB – Anchor Bolts BA – Banner Arms FH – Flag Holders	


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
 ***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details

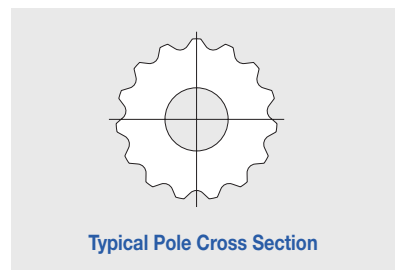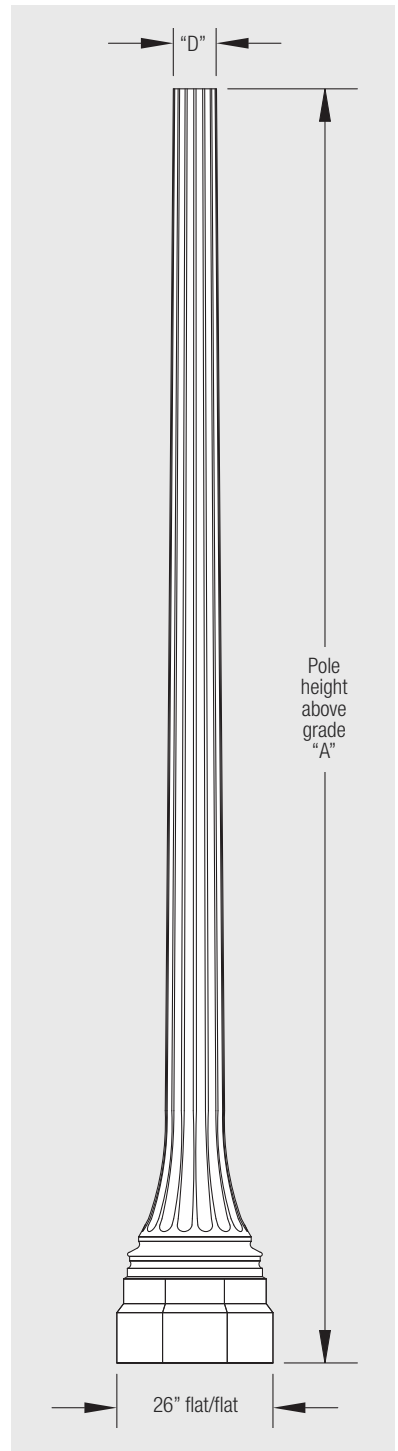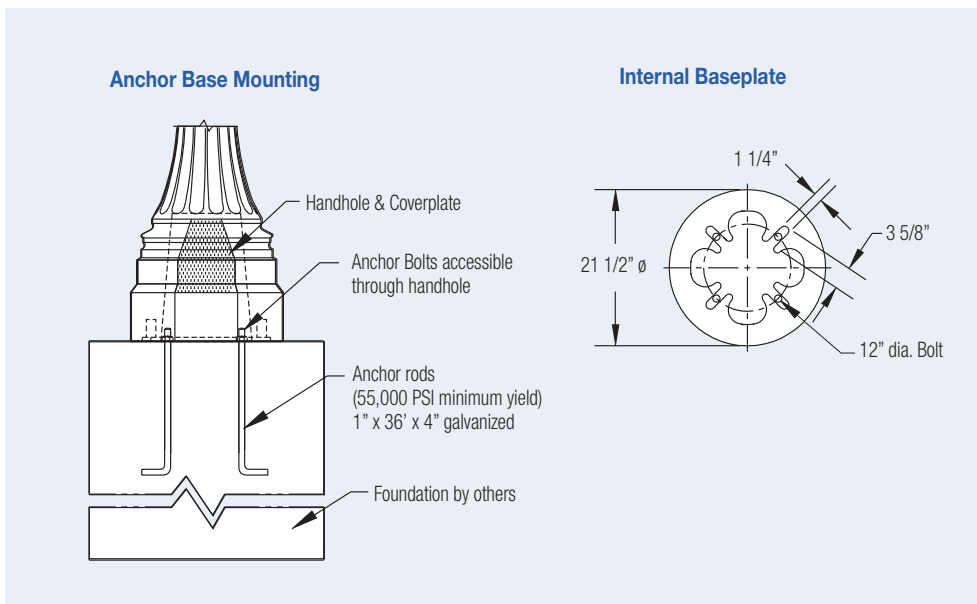

THE SHERIDAN

Probably the most widely used of all ornamental spun concrete poles, the Sheridan typifies the lighting style of the 20's and 30's. Its very substantial mass is cleverly disguised by the grace and simplicity of design which ensures its timeless appeal. Today the Sheridan is available in a host of warm earth-tone colors, complemented by our standard etched textural finish, in mounting heights of 10' to 25'.

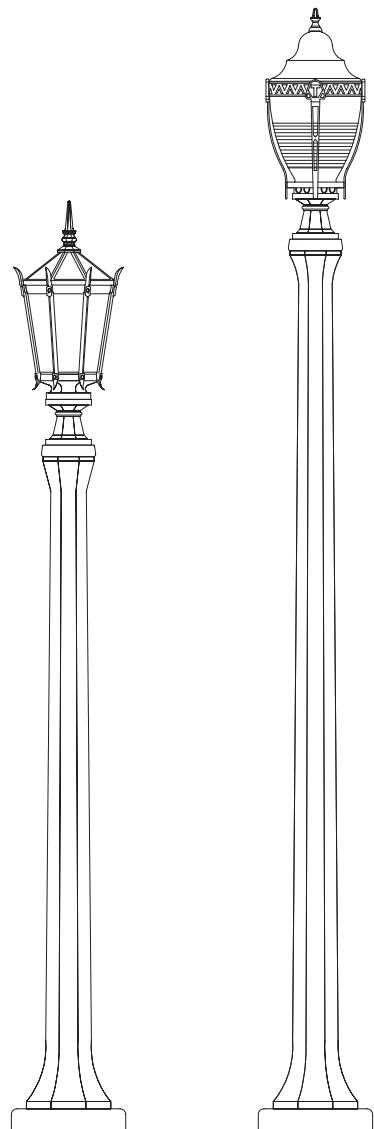

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Sheridan Flared Top 10'	KS10-F	10' 0"	9"	4' 6" x 10"	840 lbs	600 lbs
Sheridan Non Flared Top 10'	KS10-NF	10' 0"	6 3/8"	4' 6" x 10"	835 lbs	595 lbs
Sheridan Non Flared Top 12'	KS12-NF	12' 0"	6"	4' 6" x 10"	885 lbs	715 lbs
Sheridan Flared Top 13'	KS13-F	13' 0"	9"	4' 6" x 10"	925 lbs	685 lbs
Sheridan Non Flared Top 13'	KS13-NF	13' 0"	5 3/4"	4' 6" x 10"	920 lbs	680 lbs
Sheridan Non Flared Top 14'	KS14-NF	14' 0"	5 1/2"	4' 6" x 10"	918 lbs	730 lbs
Sheridan Flared Top 15'	KS15-F	15' 0"	9"	4' 6" x 10"	985 lbs	745 lbs
Sheridan Highwayman** 15'	KSH15	15' 0"	6 1/2"	4' 6" x 9 3/4"	1400 lbs	1150 lbs
Sheridan Highwayman** 18'	KSH18	18' 0"	6 1/8"	5' 0" x 9 3/4"	1570 lbs	1270 lbs
Sheridan Highwayman** 20'	KSH20	20' 0"	5 7/8"	5' 0" x 9 3/4"	1680 lbs	1380 lbs
Sheridan Highwayman** 22'	KSH22	22' 0"	5 3/4"	5' 0" x 9 3/4"	1750 lbs	1450 lbs
Sheridan Highwayman** 25'	KSH25	25' 0"	5 3/8"	5' 0" x 9 3/4"	1900 lbs	1600 lbs


* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

** All Sheridan Highwayman have Non Flared Tops.




How to Catalog for Sheridan Concrete Pole

Pole Style	Finish	Footing Details	Coating
KS KSH	E – Etched Finish S – Polished Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KS	E	DB	NA
15'	40	140 30/30	GFI
Height 10' - 25'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

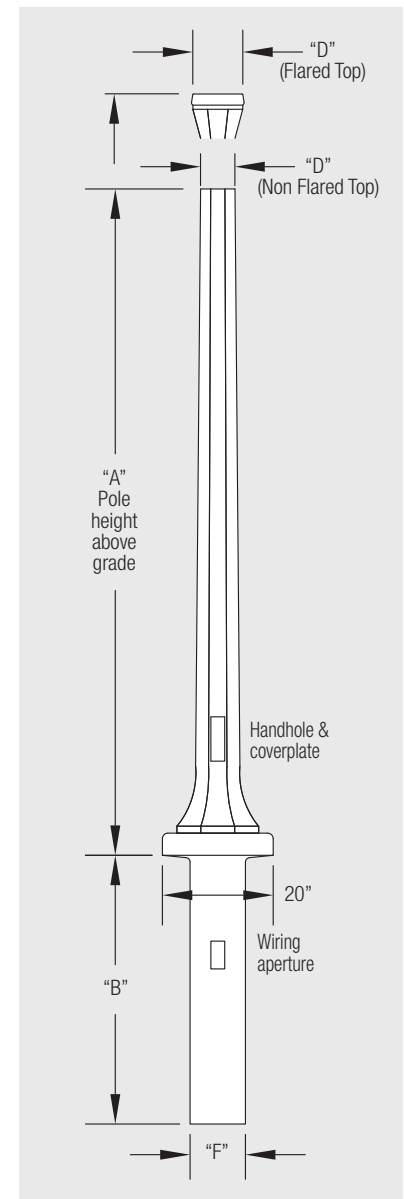


Footing Details

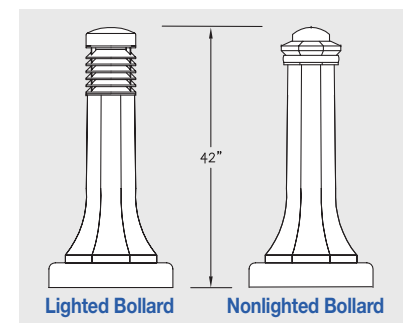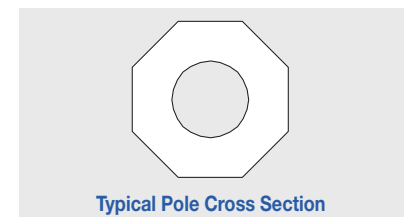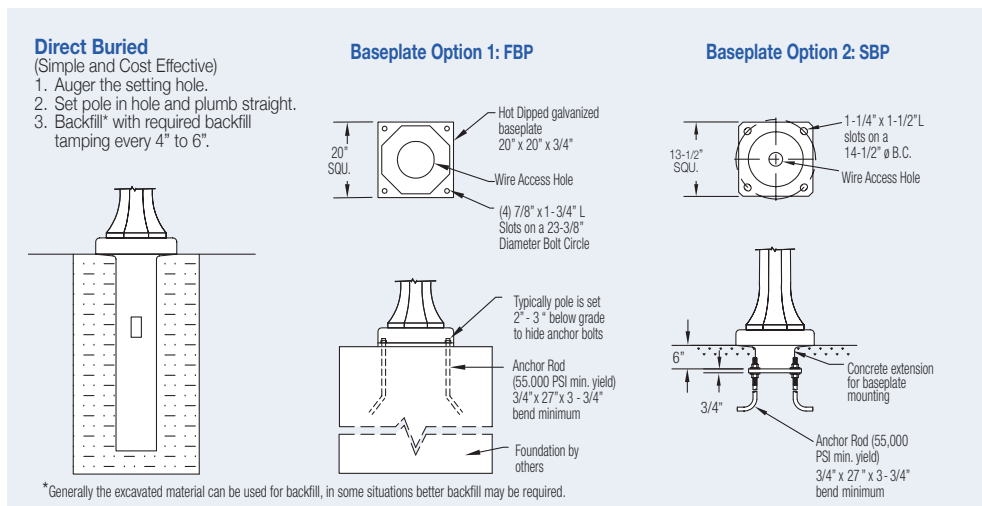

THE ST. LOUIS

The St. Louis family of poles were originally designed for use in many districts of this famous city on the Big Muddy. Originally called "The Granitoid Poles", StressCrete has reproduced this family in exacting detail. The two design variations are available from 5' to 22' mounting heights.

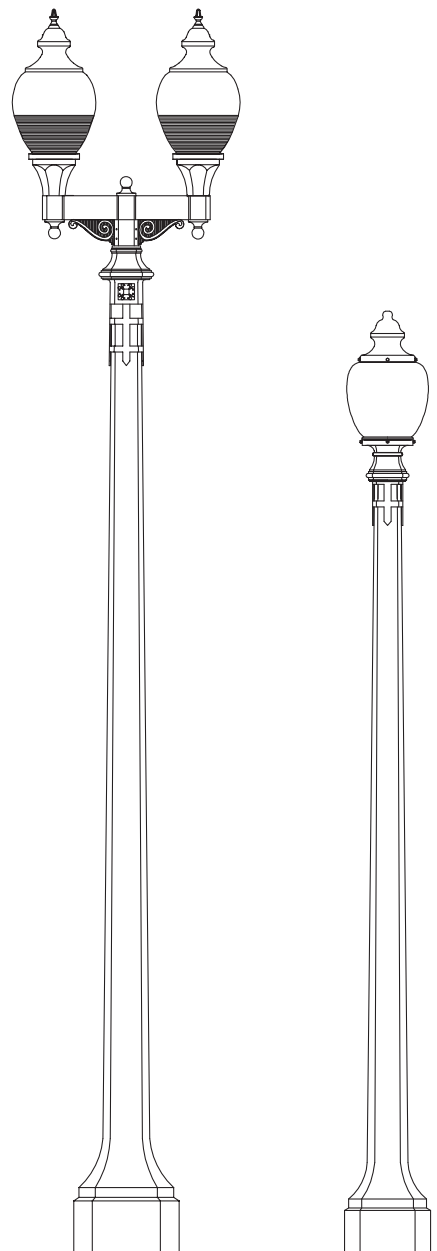


Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
St Louis 10'	KLC10	10' 0"	6 1/4"	11 3/8"	18"	5' 0" x 10"	1220 lbs	1075 lbs
St Louis 13'	KLC13	13' 0"	5 3/4"	11 3/8"	18"	5' 0" x 10"	1300 lbs	1155 lbs
St Louis 15'	KLC15	15' 0"	5 1/4"	11 3/8"	18"	5' 0" x 10"	1345 lbs	1200 lbs
St Louis 18'	KLH18	18' 0"	5 3/4"	13 3/4"	22"	5' 6" x 10"	1875 lbs	1715 lbs
St Louis 20'	KLH20	20' 0"	5 1/4"	13 3/4"	22"	5' 6" x 10"	1920 lbs	1760 lbs
St Louis 22'	KLH22	22' 0"	4 3/4"	13 3/4"	22"	5' 6" x 10"	1955 lbs	1795 lbs

How to Catalog for St. Louis Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KLC	KLH	E – Etched Finish	S – Polished Finish	DB – Direct Buried	FBP – Flush Baseplate	NA – Non Acrylic	
				SBP – Stub Baseplate		A – Acrylic	
						AG – Anti Graffiti Coating***	
KLH	22'	E	40	DB	140 30/30	GFI	NA
Height 5' - 22'		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders	

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

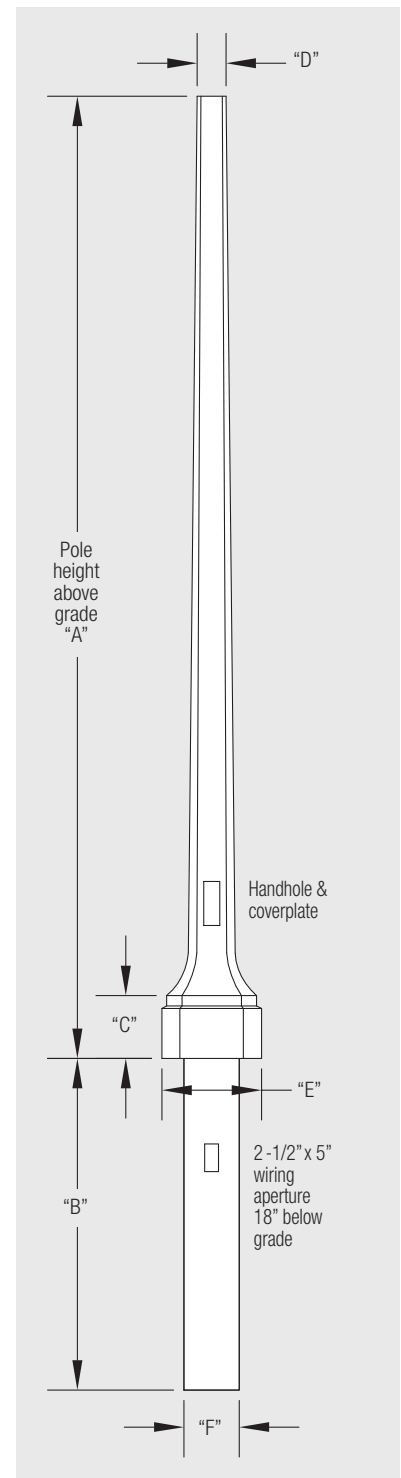


Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP



Baseplate Option 2: SBP

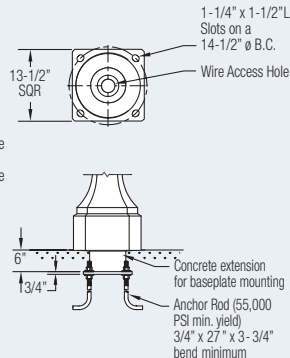


*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

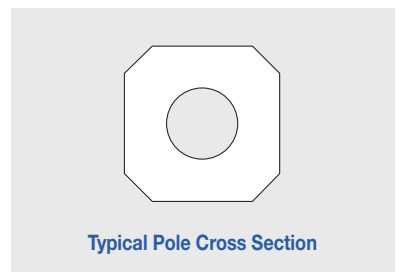

Typical Pole Cross Section

THE TALISMAN

With roots firmly established in the 20's and 30's the Talisman is an elegant version of several classic originals. In essence it is an 8 fluted version of the octagonal Belmont with the same graceful lines and proportions; the perfect choice to satisfy the tastes of many. It is available in heights from 5' to 32.5' as well as a lighted and nonlighted bollard.

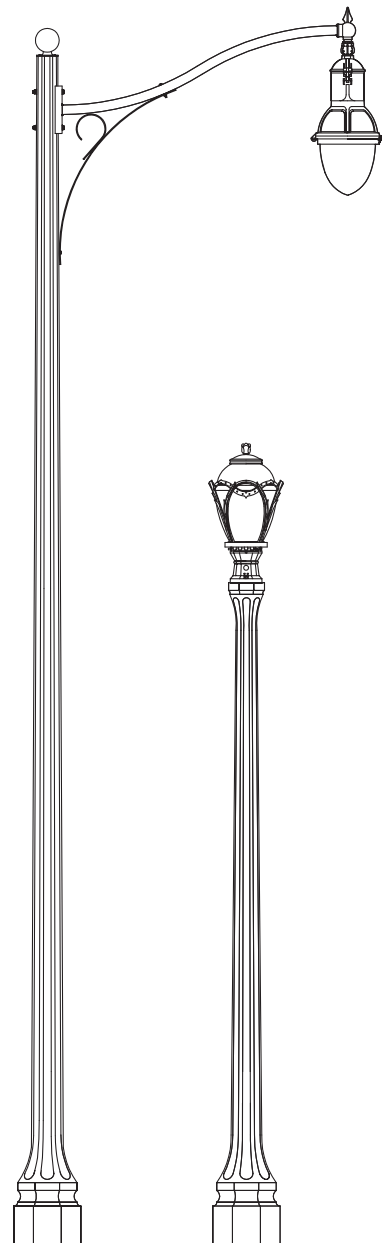

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Talisman Flared Top	KT105	11'	9"	18"	4' 6" x 9 1/2"	1200 lbs	1000 lbs
Talisman Non Flared Top	KT12	12' 0"	5 1/2"	18"	4' 6" x 9 1/2"	1300 lbs	1100 lbs
Talisman Flared Top	KT14	13' 11"	9"	18"	4' 6" x 9 1/2"	1370 lbs	1170 lbs
Talisman	KTH20	20' 0"	5 3/4"	18"	5' 0" x 9 1/2"	1600 lbs	1400 lbs
	KTH25	25' 0"	5 3/8"	18"	5' 0" x 9 1/2"	1800 lbs	1600 lbs
	KTT20	20' 0"	7 3/8"	21"	5' 0" x 12"	2270 lbs	2000 lbs
	KTT25	25' 0"	6 1/2"	21"	5' 0" x 12"	2470 lbs	2200 lbs
	KTT30	30' 0"	5 7/8"	21"	5' 0" x 12"	2630 lbs	2360 lbs
	KTT32.5	32' 6"	5 1/2"	21"	6' 0" x 12"	2720 lbs	2450 lbs


* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Talisman Concrete Pole

Pole Style	Finish	Footing Details	Coating
KT KTH KTT	E – Etched Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KTT	E	DB	NA
32.5'	40	140 30/30	GFI
Height 5' - 32' 6"	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.

***Anti Graffiti Coating is extra, consult factory for more details.

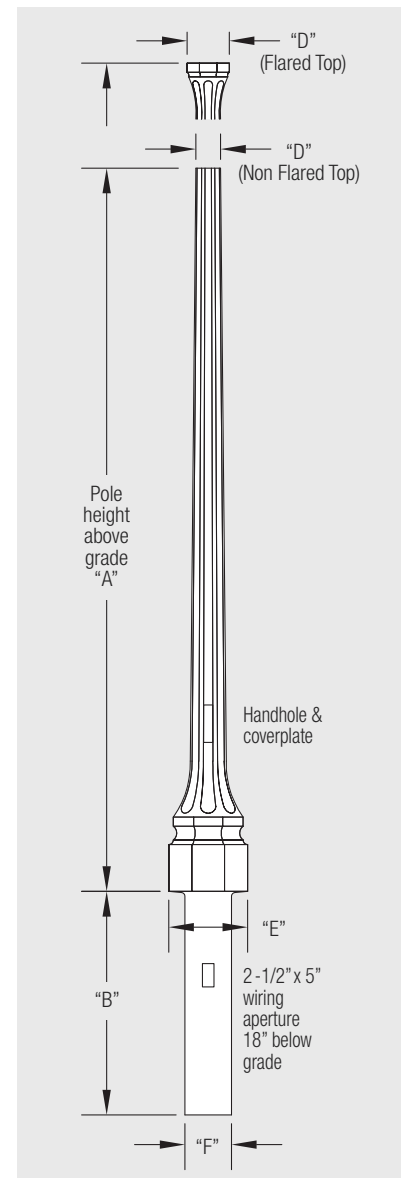


Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

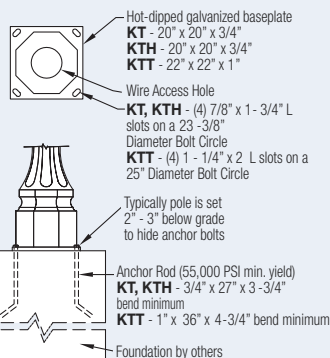


Baseplate Option 2: SBP



*Generally the excavated material can be used for backfill, in some situations better backfill may be required.



Typical Pole Cross Section




Lighted Bollard

Nonlighted Bollard

THE TRADITIONAL

This simple 10 fluted pole was originally designed and installed in many residential areas in several west coast cities. Now in spun concrete it continues to offer understated elegance to any project it may be used for. It is currently available in heights from 5' to 18' as well as a lighted and nonlighted bollard.

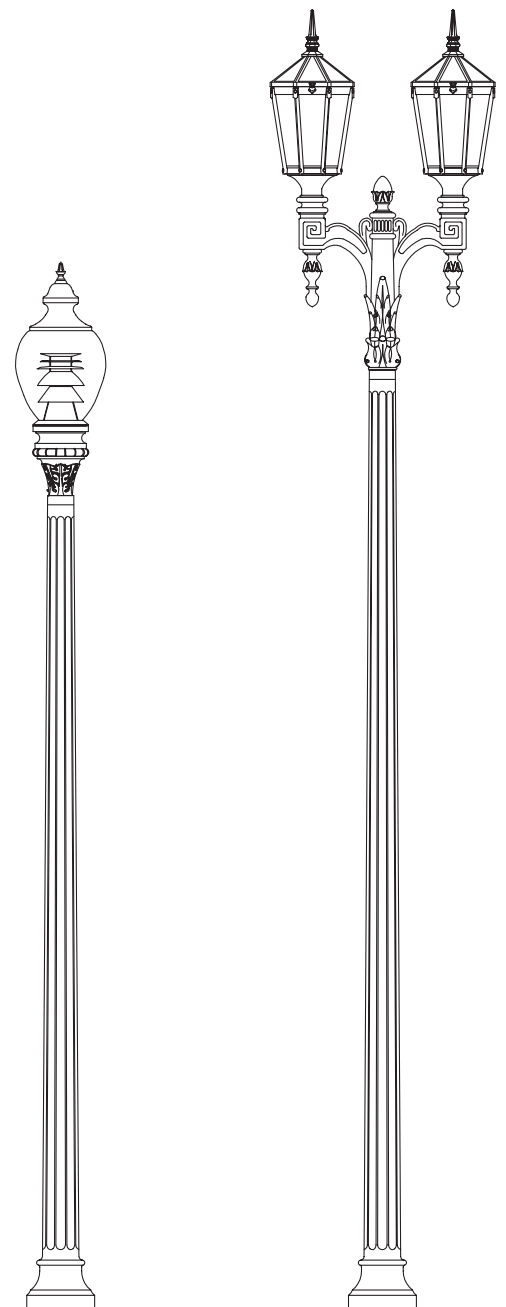

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"C" Tip Dimension	"B" Direct Burial Length & "D" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Traditional 10'	KD10	10' 1"	5 1/2"	4' 6" x 8 1/4"	525 lbs	375 lbs
Traditional 13'	KD13	13' 1"	5"	4' 6" x 8 1/4"	615 lbs	465 lbs
Traditional 15'	KD15	15' 1"	5"	4' 6" x 8 1/4"	710 lbs	560 lbs
Traditional 18'	KD18	18' 1"	5"	5' 0" x 7 3/4"	1100 lbs	850 lbs


* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Traditional Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KD		E – Etched Finish		DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate		NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***	
KD	18'	E	40	DB	140 30/30	GFI	NA
Height		Color**		Tenon (Post Top Mount)		Options*	
5' - 18'		10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders	

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.

***Anti Graffiti Coating is extra, consult factory for more details.

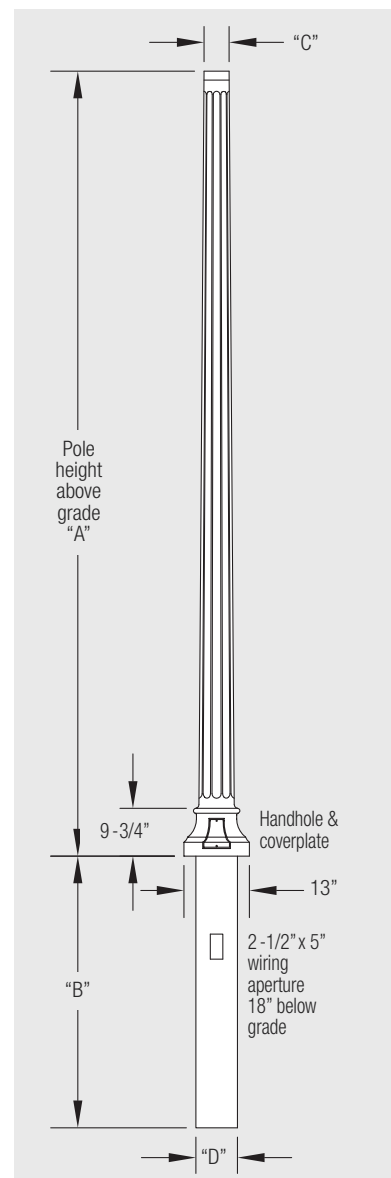


Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

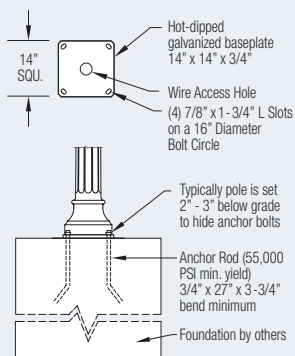


Baseplate Option 2: SBP

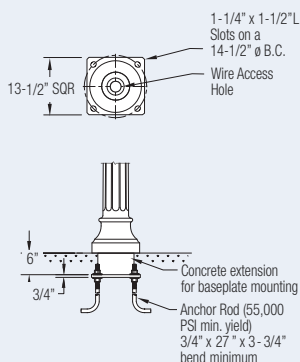

*Generally the excavated material can be used for backfill, in some situations better backfill may be required.



Typical Pole Cross Section




Lighted Bollard

Nonlighted Bollard

THE WASHINGTON

The Washington design has a long history. Originally installed around the Capital Hill & White House grounds in 1910, it is now widely used throughout the DC area and has become extremely popular across the country. StressCrete is proud to introduce a spun concrete 10 fluted version of this historic design. It is available in heights from 5' to 30' as well as a lighted and nonlighted bollard.

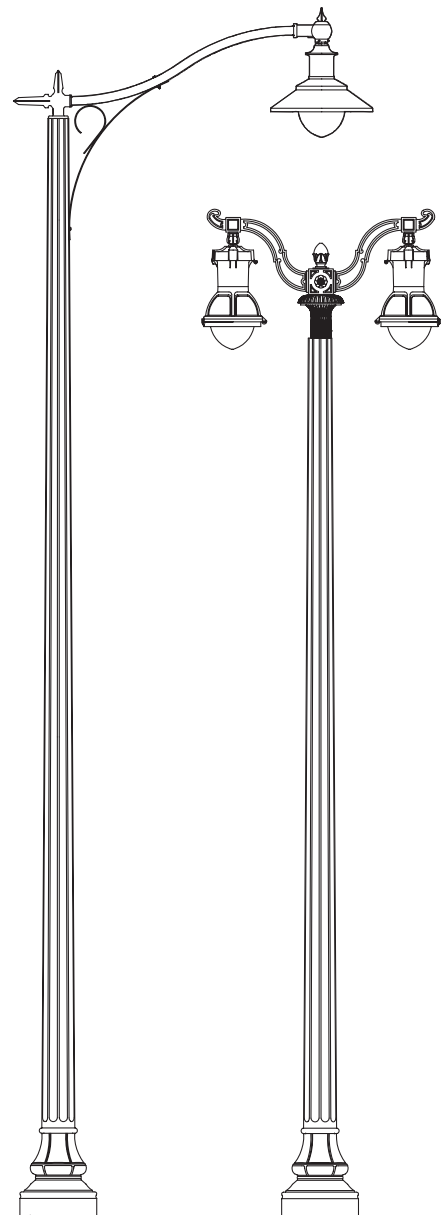

Specification Details*

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Height	"E" Flare	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Washington 10'	KWC10	10' 0"	5 3/4"	20 1/2"	18"	4' 6" x 10"	860 lbs	655 lbs
Washington 13'	KWC13	13' 0"	5 1/4"	20 1/2"	18"	4' 6" x 10"	925 lbs	720 lbs
Washington 15'	KWC15	15' 0"	5"	20 1/2"	18"	4' 6" x 10"	1100 lbs	895 lbs
Washington 18'	KWH18	18' 0"	6 3/4"	24"	21"	5' 0" x 12"	1660 lbs	1390 lbs
Washington 20'	KWH20	20' 0"	6 3/8"	24"	21"	5' 0" x 12"	1750 lbs	1480 lbs
Washington 25'	KWH25	25' 0"	5 3/4"	24"	21"	5' 0" x 12"	1900 lbs	1630 lbs
Washington 30'	KWH30	30' 0"	5"	24"	21"	5' 0" x 12"	2140 lbs	1870 lbs


* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com

How to Catalog for Washington Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KWC		E – Etched Finish		DB – Direct Buried		NA – Non Acrylic	
KWH				FBP – Flush Baseplate		A – Acrylic	
				SBP – Stub Baseplate		AG – Anti Graffiti Coating***	
KWH	30'	E	40	DB	140 30/30	GFI	NA
Height 5' - 30'		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders	

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.

***Anti Graffiti Coating is extra, consult factory for more details.

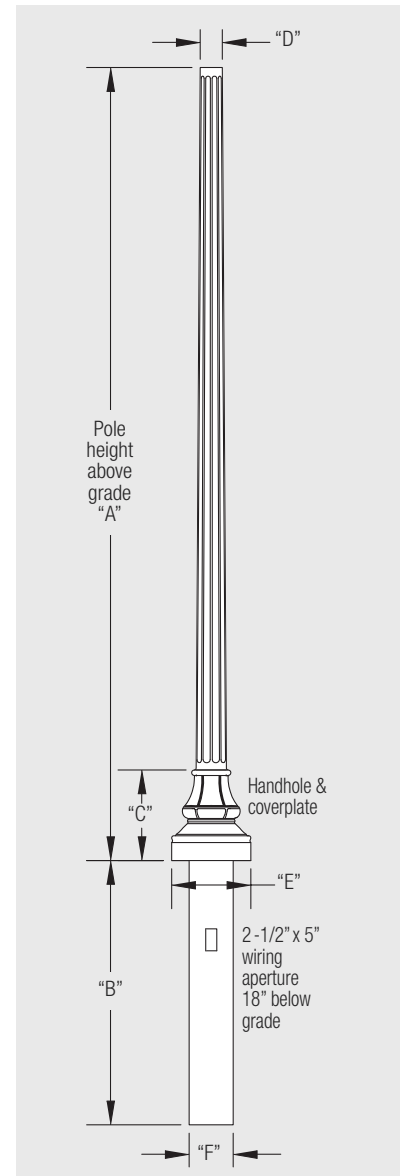


Footing Details



Direct Buried

(Simple and Cost Effective)



1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

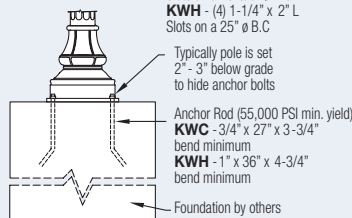


Baseplate Option 2: SBP



* Generally the excavated material can be used for backfill, in some situations better backfill may be required.



Typical Pole Cross Section




Lighted Bollard

Nonlighted Bollard

THE WINDSOR

The Windsor family of poles offers the classic elegance of a square tapered shaft and an integral stepped base. Its clean simple lines ideally suit it for either traditional or contemporary themes. Both the two and three step versions are available in heights of 10' to 36' above grade.

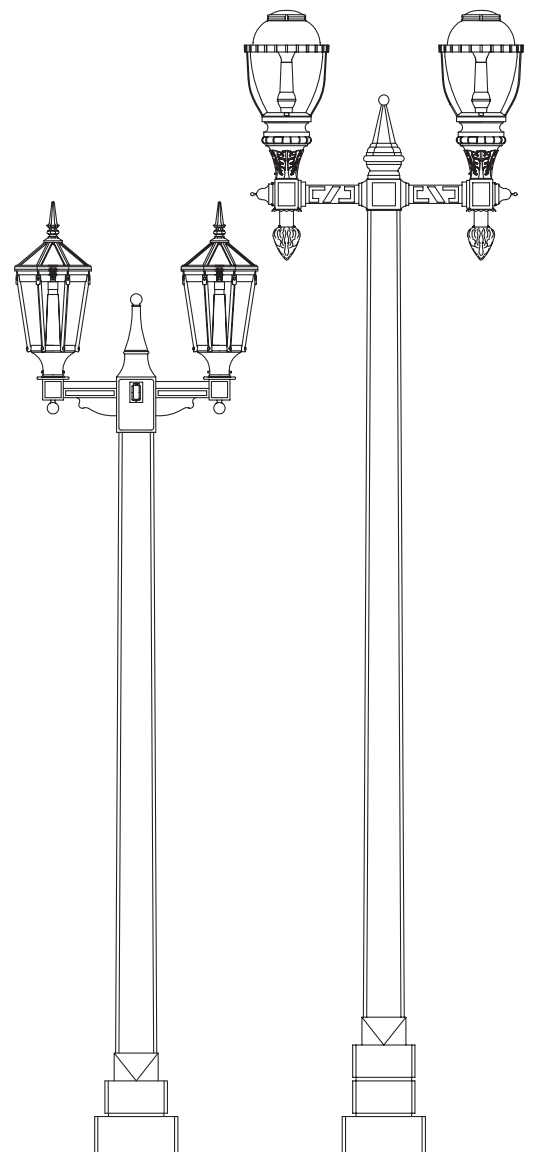

Specification Details

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"C" Stepped Section Ht.	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Windsor 2-Tier 15'	KRJ15	15' 0"	7 1/4"	15 3/4"	5' 0" x 9 1/2"	1180 lbs	1070 lbs
Windsor 2-Tier 18'	KRJ18	18' 0"	6 7/8"	15 3/4"	5' 0" x 9 1/2"	1295 lbs	1185 lbs
Windsor 2-Tier 20'	KRJ20	20' 0"	6 5/8"	15 3/4"	5' 0" x 9 1/2"	1365 lbs	1255 lbs
Windsor 2-Tier 25'	KRJ25	25' 0"	6"	15 3/4"	5' 0" x 9 1/2"	1515 lbs	1405 lbs
Windsor 2-Tier 30'	KRJ30	30' 0"	5 3/8"	15 3/4"	6' 0" x 9 1/2"	1690 lbs	1530 lbs
Windsor 2-Tier 36'	KRJ36	36' 0"	4 3/4"	15 3/4"	6' 0" x 9 1/2"	1780 lbs	1620 lbs

Windsor 3-Tier 15'	KRS15	15' 0"	7 1/4"	23 1/2"	5' 0" x 9 1/2"	1210 lbs	1100 lbs
Windsor 3-Tier 18'	KRS18	18' 0"	6 7/8"	23 1/2"	5' 0" x 9 1/2"	1325 lbs	1215 lbs
Windsor 3-Tier 20'	KRS20	20' 0"	6 5/8"	23 1/2"	5' 0" x 9 1/2"	1395 lbs	1285 lbs
Windsor 3-Tier 25'	KRS25	25' 0"	6"	23 1/2"	5' 0" x 9 1/2"	1545 lbs	1435 lbs
Windsor 3-Tier 30'	KRS30	30' 0"	5 3/8"	23 1/2"	6' 0" x 9 1/2"	1720 lbs	1560 lbs
Windsor 3-Tier 36'	KRS36	36' 0"	4 3/4"	23 1/2"	6' 0" x 9 1/2"	1810 lbs	1650 lbs

How to Catalog for Windsor Concrete Pole

Pole Style		Finish		Footing Details		Coating	
KRJ	KRS	E – Etched Finish	S – Polished Finish	DB – Direct Buried	FBP – Flush Baseplate	NA – Non Acrylic	
				SBP – Stub Baseplate		A – Acrylic	
						AG – Anti Graffiti Coating***	
KRJ	36'	E	40	DB	140 30/30	GFI	NA
Height 10' - 36'		Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze		Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long		Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders	


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details


Direct Buried

(Simple and Cost Effective)


1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".




Baseplate Option 1: FBP

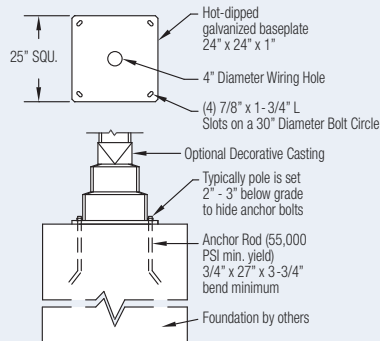

Baseplate Option 2: SBP



*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

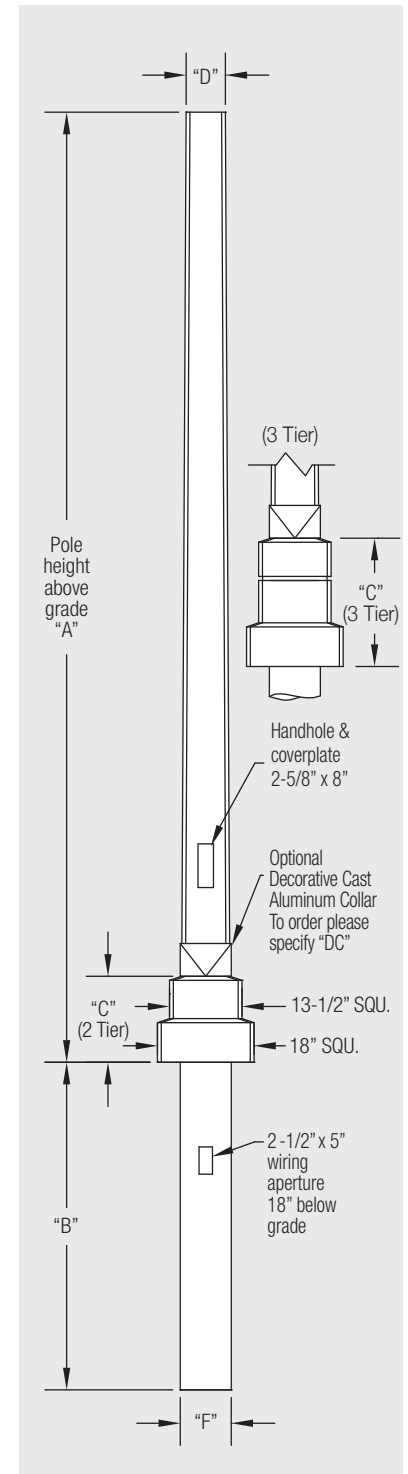


Typical Pole Cross Section

ROUND

tapered

The most functional shape with regard to wind-loading, this round tapered pole is available in lengths up to 60' for many applications. Widely used in mold finish for power distribution and frequently the pole of choice for sports lighting applications, it is also in great demand for street and area lighting, both as a utility standard in mold finish and in etched decor for more decorative uses.



How to Catalog for Round Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Class A-K***

E

300

Height

Overall Pole
Length x 10
5' - 60'***

Finish

E - Etched Finish

E

10

Color**

10 - Midnight Lace
11 - Eclipse Black
30 - Salt & Pepper
40 - Pearl Gray
90 - Saluki bronze

Prestressed
Round
Cross Section

Provision for
Electric Ground

Complete with
(To be supplied
by StressCrete)

C/W

140 30/30

Tenon (Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

Arms* (Pendant Mount)

100 - Top Mounted Tapered
Elliptical Aluminum Arm
120 - Side Mounted Elliptical
Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

100

GFI

NA

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

Coating

NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti
Coating****

* Consult website for full listings ** See decor colors on page 2 for full selection of colors


*** Please consult factory for additional options.

**** Anti Graffiti Coating is extra, consult factory for more details.

OCTAGONAL

tapered

This popular shape is available in many strengths up to a 50' overall length lighting pole suitable for arm mounted luminaires. Frequently used in both etched and polished finish in many decor colors, it can also be ordered in the economical light gray standard mold finish.



How to Catalog for Octagonal Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Finish

Prestressed

Class A-C

Octagonal
Cross Section

E

300

Height

Overall Pole
Length x 10
5' - 50'

B P O

G

Provision for
Electric Ground

E

10

Color**

10 - Midnight Lace
11 - Eclipse Black
30 - Salt & Pepper
40 - Pearl Gray
90 - Saluki bronze

Complete with
(To be supplied
by StressCrete)

C/W

140 30/30

Tenon (Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

Arms* (Pendant Mount)

100 - Top Mounted Tapered
Elliptical Aluminum Arm
120 - Side Mounted Elliptical
Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

100

GFI

NA

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

Coating

NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti
Coating***


* Consult website for full listings ** See decor colors on page 2 for full selection of colors

***Anti Graffiti Coating is extra, consult factory for more details.

HEXAGONAL

tapered

Having the largest taper of any of our Symmetry Series enables the hexagonal pole to stand out as a very visible vertical component in either a roadway or area lighting scenario. Designed with a 4 3/4" flat to flat tip, it can be used as either a delicate post top or a more substantial arterial pole when teamed with arm mounted luminaires. It is available either in economical mold finish or more upscale decor colors in both etched or polished finishes.



How to Catalog for Hexagonal Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Finish

E - Etched Finish
S - Polished Finish

Arms* (Pendant Mount)

100 - Top Mounted Tapered Elliptical Aluminum Arm
120 - Side Mounted Elliptical Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

E

295

Height

Overall Pole Length x 10
5' - 29' 6"

B

P

H

G

Color**

E

10

Tenon

(Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

C/W

140 30/30

100

GFI

NA

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

Coating


NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti Coating***

* Consult website for full listings ** See decor colors on page 2 for full selection of colors
***Anti Graffiti Coating is extra, consult factory for more details.

SQUARE

non tapered

This pole type is available in a 5 1/2" flat to flat cross section with rounded corners. While blending well with shoebox luminaires, it can also provide an interesting look when used with some post tops. Available in overall lengths up to 30' in all our decor colors with etched and polished textures, or in the light gray mold finish so popular with many utilities.



How to Catalog for Square Non Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Class AAA-AA

Prestressed

Non Tapered
Square
Cross Section

Finish

E - Etched Finish
S - Polished Finish

Color**

10 - Midnight Lace
11 - Eclipse Black
30 - Salt & Pepper
40 - Pearl Gray
90 - Saluki bronze

Complete with
(To be supplied
by StressCrete)

Tenon (Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

Arms* (Pendant Mount)

100 - Top Mounted Tapered
Elliptical Aluminum Arm
120 - Side Mounted Elliptical
Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

Coating

NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti
Coating***


* Consult website for full listings ** See decor colors on page 2 for full selection of colors

***Anti Graffiti Coating is extra, consult factory for more details.

SQUARE

tapered

The square cross section of this pole comes with chamfered corners. It is available as an arterial lighting pole up to 45' in overall length. All decor colors and finishes are available as well as our economical mold finish in light gray.



How to Catalog for Square Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Finish

E - Etched Finish
S - Polished Finish

Complete with
(To be supplied
by StressCrete)

Arms* (Pendant Mount)

100 - Top Mounted Tapered
Elliptical Aluminum Arm
120 - Side Mounted Elliptical
Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

E

300

B P T

G

E

10

C/W

140 30/30

100

GFI

NA

Height

Overall Pole
Length x 10
5' - 45'

Color**

10 - Midnight Lace
11 - Eclipse Black
30 - Salt & Pepper
40 - Pearl Gray
90 - Saluki bronze

Tenon (Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

Coating


NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti
Coating***

* Consult website for full listings ** See decor colors on page 2 for full selection of colors

***Anti Graffiti Coating is extra, consult factory for more details.

FLUTED *tapered*

This pole is available in an 8 flute cross section with a tapered shaft in lengths up to 29' 6" ensuring that it can be used both as a lower cost decorative post top, or as an arterial pole when teamed with side mounted luminaires. A heavy duty version is also available that can be used in conjunction with our fluted Americana designs when greater mounting heights or heavier torsional loads are needed. Normally used with decor colors in an etched finish, it can also be supplied as a special order in light gray mold finish.



How to Catalog for Fluted Tapered Pole

Mounting Option

E - Direct Embedment
P - Base Plate

Prestressed

Class A-C

Fluted
Cross Section

E

295

Height

Overall Pole
Length x 10
5' - 29' 6"

B P F

G

Provision for
Electric Ground

Finish

E - Etched Finish

E

10

Color**

10 - Midnight Lace
11 - Eclipse Black
30 - Salt & Pepper
40 - Pearl Gray
90 - Saluki bronze

Complete with
(To be supplied
by StressCrete)

C/W

140 30/30

Tenon (Post Top Mount)

Specify Tenon Size
For example 140 30/30
= 2 7/8" OD & 3" long

Arms* (Pendant Mount)

100 - Top Mounted Tapered
Elliptical Aluminum Arm
120 - Side Mounted Elliptical
Aluminum Arm
130 - Shoe Box Arm
170 - Victorian Scroll Arm

100

GFI

Options*

DR - 2 Outlets
GFI - Ground Fault 2 Outlet
SR - 1 Outlet
LRN - Ladder Rest
BPC - Base Plate Cover
AB - Anchor Bolts
BA - Banner Arms
FH - Flag Holders

NA

Coating

NA - Non Acrylic
A - Acrylic
AG - Anti Graffiti
Coating***


* Consult website for full listings ** See decor colors on page 2 for full selection of colors

***Anti Graffiti Coating is extra, consult factory for more details.

Concrete Bollards



**The
BELMONT
KL-C-B**

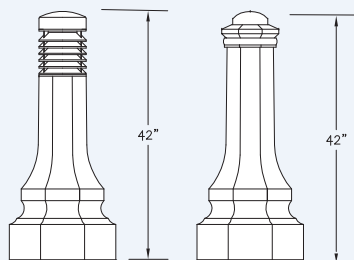


Lighted Bollard

Nonlighted Bollard



**The
CANTERBURY
KL-C-YC**




Lighted Bollard

Nonlighted Bollard



**The
SHERIDAN
KL-C-SH**

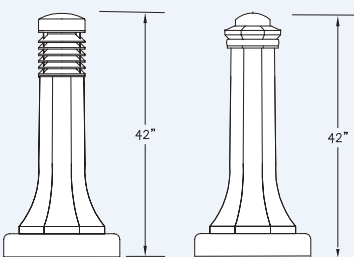


Lighted Bollard

Nonlighted Bollard



**The
SILHOUETTE
KL-C-S**




Lighted Bollard

Nonlighted Bollard



**The
TALISMAN
KL-C-T**

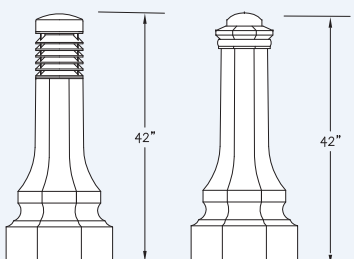


Lighted Bollard

Nonlighted Bollard



**The
TRADITIONAL
KL-C-TD**



Lighted Bollard


Nonlighted Bollard

* please visit our website at www.StressCreteGroup.com for complete bollards brochure with how to catalog information.

** lit bollards shown, all also available in non-lit options.



The CLASSIC KL-C-C




Lighted Bollard

Nonlighted Bollard



The MONITOR KL-C-M




Lighted Bollard

Nonlighted Bollard



The MARTELLO SQUARE KL-C-SQ




Lighted Bollard

Nonlighted Bollard



The WASHINGTON KL-C-W

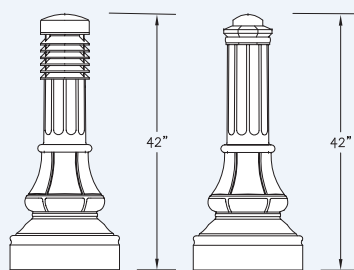


Lighted Bollard

Nonlighted Bollard




Concrete Bollards Mounting Options


Belmont

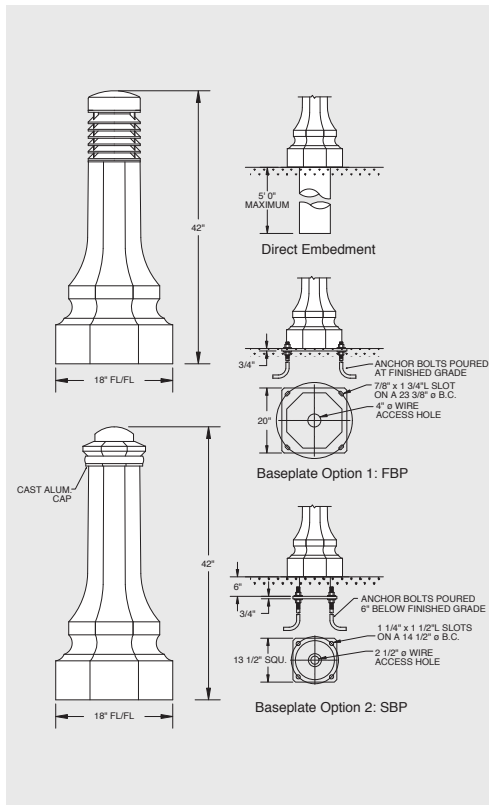


Canterbury

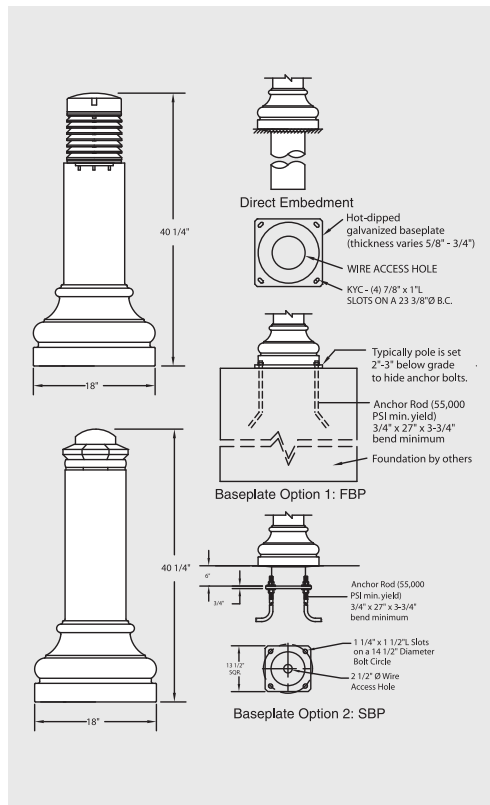


Classic

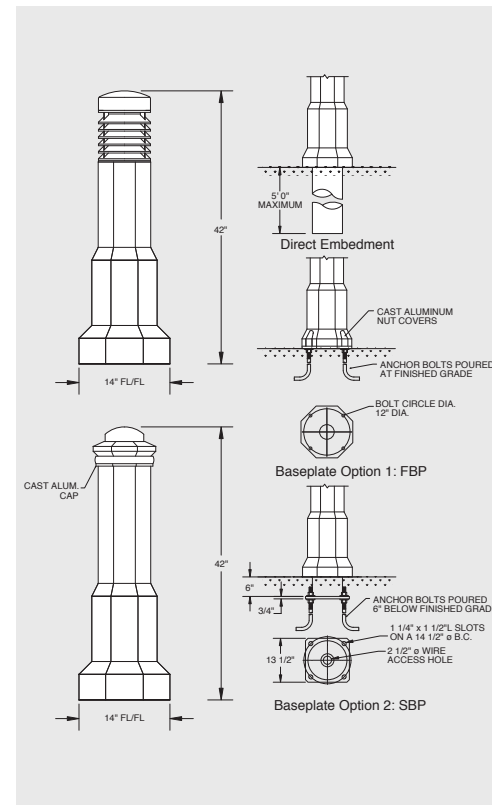


Silhouette

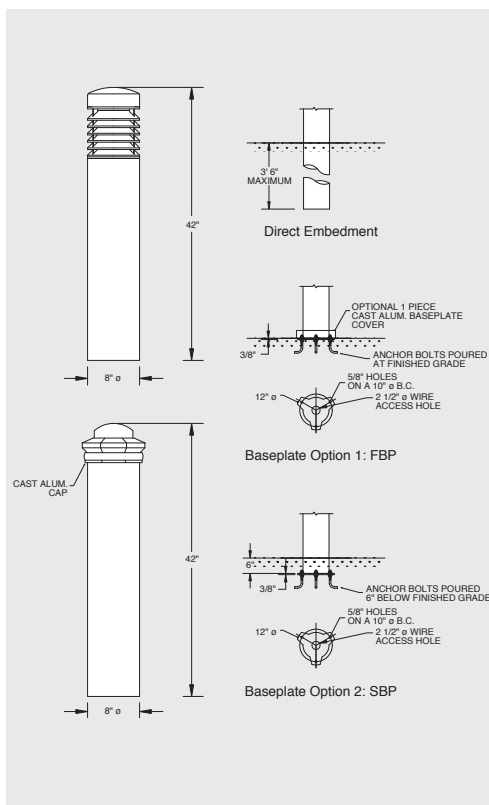


Martello Square

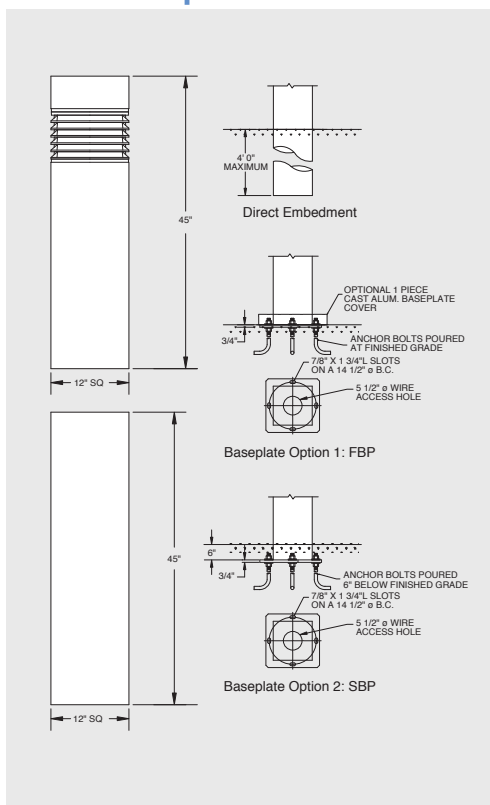


Talisman

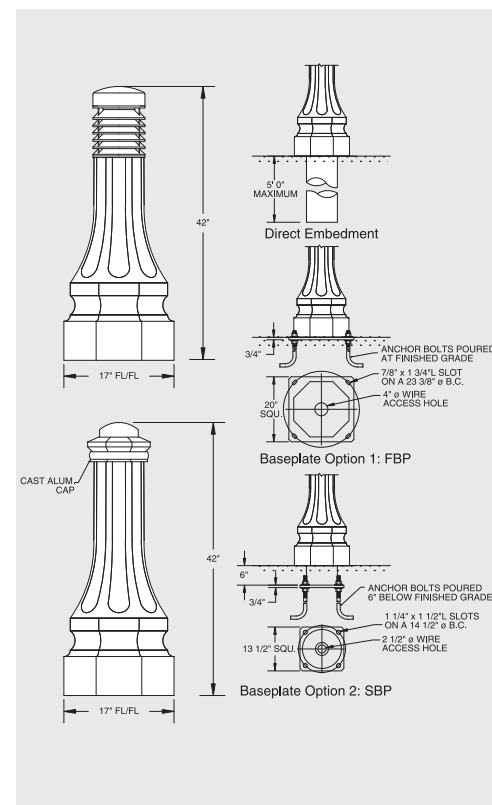


Monitor

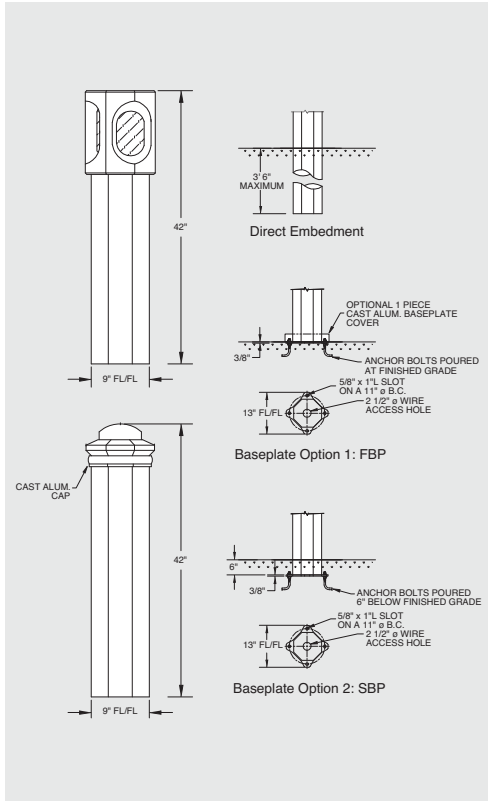


Sheridan

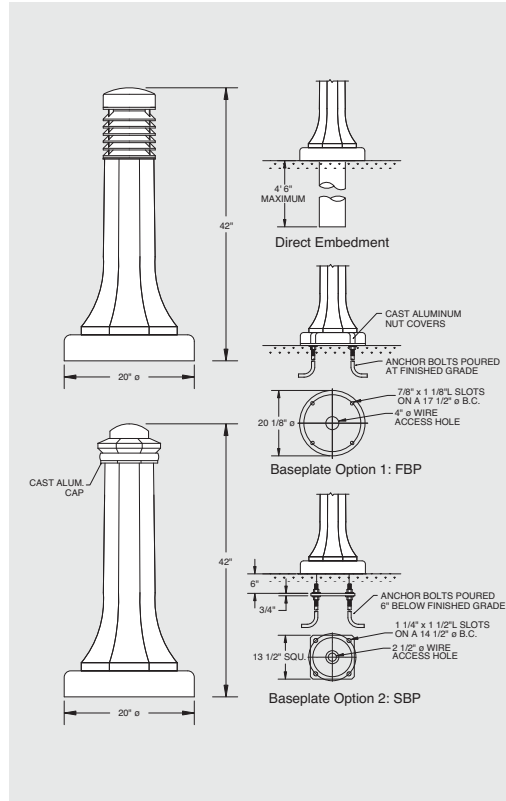


Traditional

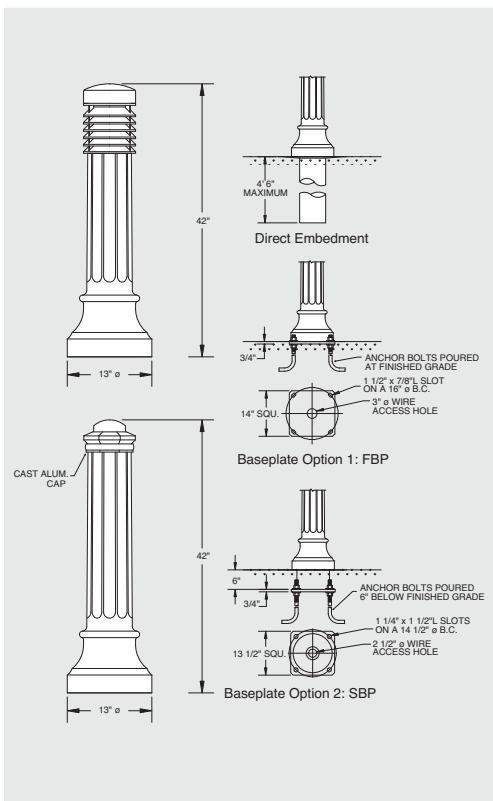

Washington

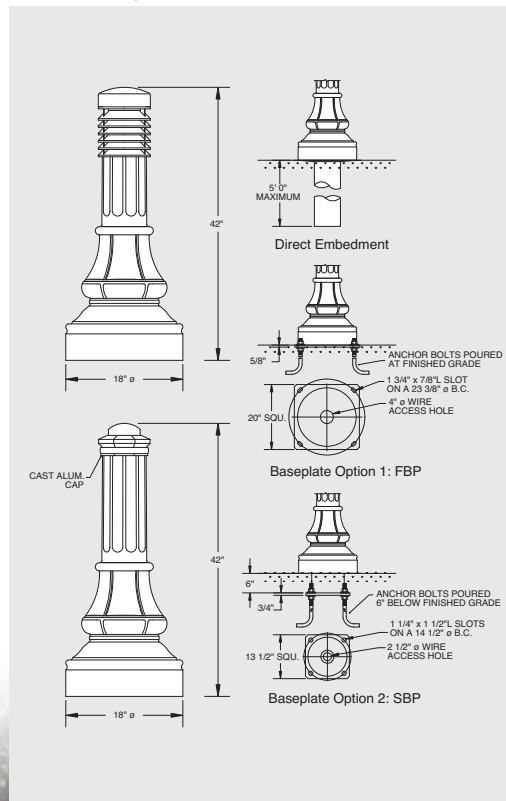

Established in 1953, The StressCrete Group is the oldest, most reliable manufacturer of spun concrete poles in North America. We also manufacture high quality decorative outdoor lighting fixtures, fabricated metal poles, arms, and site furnishings under the King Luminaire brand.

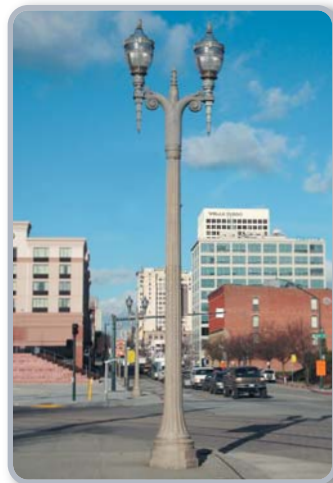


U.S.A.

9200 Energy Lane
Northport, Alabama
35476
Toll Free: 1-800-435-6563
Local: (205) 339-0711
Fax: (205) 339-4840

14503 Wallick Road
Atchison, Kansas
66002
Toll Free: 1-800-837-1024
Local: (913) 255-3112
Fax: (913) 255-3124

1153 State Route 46 North
P.O. Box 266
Jefferson, Ohio
44047
Toll Free: 1-800-268-7809
Fax: (905) 632-8116

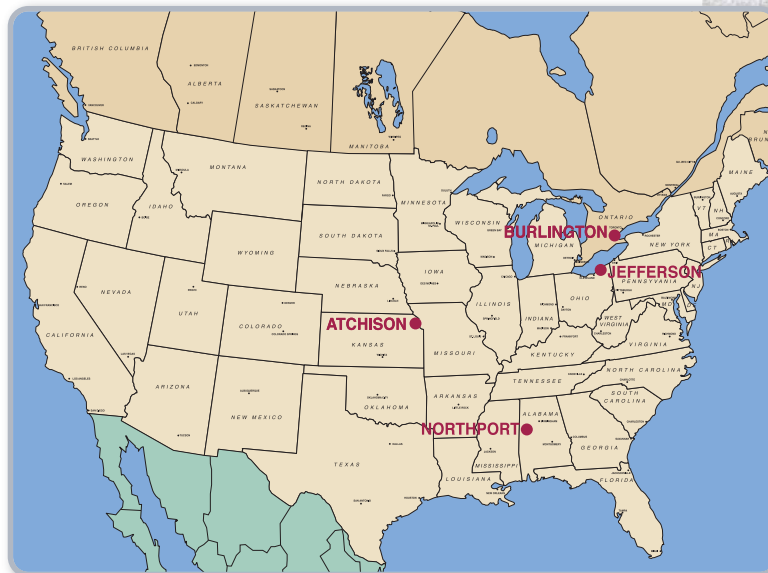

CANADA

840 Walkers Line
P.O. Box 7
Burlington, Ontario
L7R 3X9
Toll Free: 1-800-268-7809
Local: (905) 632-9301
Fax: (905) 632-8116



King Luminaire • StressCrete • Est. 1953

**STRESSCRETE
GROUP**

Quality People • Quality Products

www.StressCreteGroup.com • www.StressCrete.com • www.KingLuminaire.com