


Power, RS-485, and RS-232 sensor cable


The SmartSensor 8-conductor cable can be used with the SmartSensor V, HD, and Advance retrofit to provide power and communication connectivity to the sensors. Heavy-duty and weather-resistant, this custom cable is ideal for cable runs from the sensor to the cabinet.




- Two connectors available: 10-pin connector for connecting to SmartSensor V and HD; 26-pin connector for connecting to SmartSensor V retrofit, HD legacy, HD retrofit and Advance retrofit
- Provides power, RS-232, and RS-485 between sensor and cabinet
- Connector is keyed to ensure proper connection
- Color-coded for quick and easy wiring to terminal blocks, Click modules or other devices
- RS-485 and power conductors are twisted pairs; RS-232 conductors are lead wires
- Cable assembly is shielded with aluminum/mylar shield and a tinned copper drain wire
- RoHS compliant
- Cable end connector backshell is environmentally sealed, offering excellent immersion capability
- Connector backshell supports cable slack under extreme weather conditions

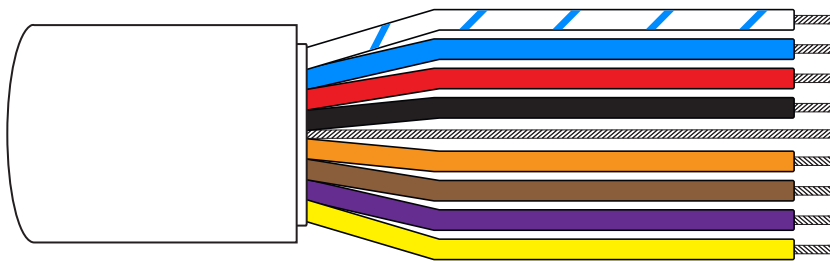

8-conductor cable



10-pin connector



26-pin connector