

# Dialight

## LED TRAFFIC CABINET LIGHTING 2 LAMP AND 4 LAMP KITS



### FEATURES / BENEFITS

- ▲ Low energy use, up to 65% reduction vs 30 watt fluorescent tube
- ▲ Full illumination at cold temperatures
- ▲ Cool White for improved visibility
- ▲ 70% lumen maintenance @50K hours
- ▲ Diffused lens for even illumination
- ▲ Mounts to top, sides or under shelf
- ▲ Modular “quick connect” system for ease of installation
- ▲ Cool to touch
- ▲ RoHS Compliant



### SPECIFICATIONS

- ▲ Operating Temperature : -20°C to +40°C
- ▲ Includes Class 2 Power supply with 24 VDC output
- ▲ Cool White Light, 5000K
- ▲ 5.3 Watts per single module
- ▲ Module mounts with two #6 Machine screws
- ▲ Module is polarity protected
- ▲ Anodized aluminum base
- ▲ Hi Flux LEDs 280 Lumen minimum per single module
- ▲ 20 AWG PTFE cable – UL-E213967, 300 V. 80°C
- ▲ Module UL-2108 Approved

### CL-2 LIGHTING ITEM PER KIT

Kit Number	CL-2 with Diffused Lens	CL-2 Start 9.8'	CL-2 E2E	CL-2 End	CL-2 Extend 36"	120 VAC Power Supply	
						17 Watt	34 Watt
CL2-CF-TC2	2	1	1	1	1	1	-
CL2-CF-TC4	4	1	2	1	1	-	1



### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA


Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778

www.dialight.com



MDTSCL2X001\_A

### CL-2 KIT COMPONENTS

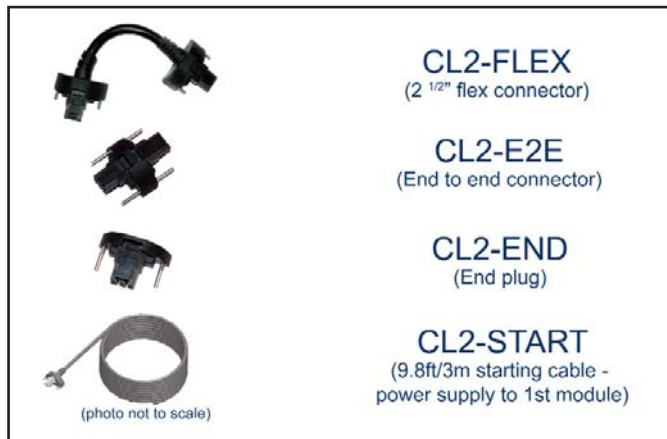

### TYPICAL CABINET LIGHT INSTALLATION

