

PUSH BUTTON STATION

The 4 Wire Navigator PBS is the pedestrian interface to the Navigator Accessible Pedestrian Signal. The PBS provides valuable information and cues via both a vibrating arrow button and audible sounds making the intersection accessible for all pedestrians. All sounds emanate from the back of the unit via a weather-proof speaker that is protected by a vandal resistant screen. A sunlight visible LED latches "ON" to confirm the button has been pushed. Each PBS connects to a Control Unit located inside its associated ped sign housing. A four wire cable connects the PBS to the power unit.

PBS includes:

- Frame with Option "A" sign, ADA compliant push button, and mounting hardware.

By interfacing with the Control Unit that installs in the Pedestrian Walk Sign, the PBS can provide the following standard features.

- Confirmation of button push via latching LED, sound, and vibrotactile bounce.
- Direction of travel (with extended button push).
- Standard locating tone during Don't Walk (and clearance if desired).
- Cuckoo, chirp, or standard voice message during walk.
- Vibrating button during walk.
- Standard locating tone, custom sound, or verbal countdown during PED clearance.
- All sounds automatically adjust to ambient over 60dB range.
- Most sounds can have minimum and maximum volume independently set.
- Extended button push can turn on and/or boost volumes during the next walk cycle.

Additional custom options listed on page 2.

INFORMATION ON THIS DOCUMENT IS PROPRIETARY TO POLARA AND SHALL NOT BE USED, COPIED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT OF POLARA.

Revised - 04/24/06										<p>POLARA ENGINEERING INC. 4115 W. ARTESIA AVE. FULLERTON, CA. 92833</p>						
															TOLERANCES: .XXX ±.005 .XX ±.02 (EXCEPT AS NOTED)	
DRAWN BY			CKR.		ENG. MGR.		MFG. MGR.			SHEET 1 OF 2						
DATE			DSN. ENG.		Q.A. APP.		FINAL APP.			USE 4W NAV						
										TITLE					DWG. NO.	
										4 WIRE NAVIGATOR PUSH BUTTON STATION (PBS)					N45AN0-X	
REV.	DATE	LTR	E.C.O. NO.	BY	CKR	ENG	DSN	MFG	QA	FNL						

Custom message and sound options definable by customer include:

- Custom locating tone
- Informational message
- Custom walk sounds/message
- Custom clearance sound
- Multiple languages (up to three, selectable by user)
- Street name in Braille on the sign

All above features along with many more are field selectable using a Configurator.


Available in three standard colors - Black, Green & Yellow
 -X at end of part number specifies color:
 -B = Black, -G = Green, -Y = Yellow

Environmental: -40°F (-40°C) to 150°F (65°C)
 Push Button: ADA Compliant, raised tactile arrow on button, solid state switch rated to 20 million actuations minimum.
 Construction: Die-cast aluminum, powder coated

PLATE MARKING OPTIONS



STANDARD OPTION A

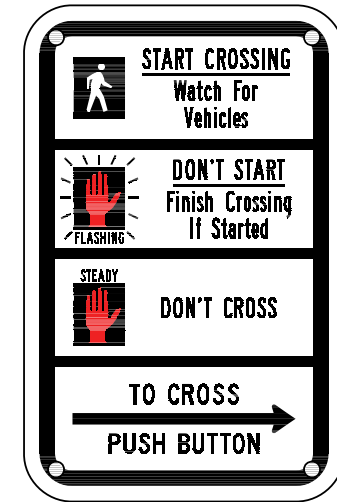

OPTION B

INFORMATION ON THIS DOCUMENT IS PROPRIETARY TO POLARA AND SHALL NOT BE USED, COPIED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT OF POLARA.

REV	REV. DATE 04-24-06	TOLERANCES: .XXX ±.005 .XX ±.02 (EXCEPT AS NOTED)			TITLE	DWG. NO.
ECO	DATE CREATED 09-08-03	SCALE 1:3	SHEET OF 2 OF 2	USE 4W NAV	4 WIRE NAVIGATOR PUSH BUTTON STATION (PBS)	N45AN0-X